

WOLF 1MS

WOLF 2MS

FM Monitoring System and Streaming Device

(Rev. 1.8 ENG)



SUMMARY

1	INTRODUCTION.....	5
1.1	AVAILABLE MODEL	5
1.2	USE OF THIS MANUAL.....	5
1.3	REVISION HYSTORY AND NOTES.....	5
2	GENERAL DESCRIPTION	6
3	SAFETY WARNINGS / ISTRUZIONI PER LA SICUREZZA	20
3.1	FOREWORD	20
4	SAFETY WARNINGS	21
5	CONSIGNES DE SÉCURITÉ IMPORTANTES.....	22
6	ISTRUZIONI IMPORTANTI PER LA SICUREZZA	23
7	WICHTIGE SICHERHEITSHINWEISE.....	24
8	INSTRUCCIONES IMPORTANTES DE SEGURIDAD	26
9	UNPACKING AND INSPECTION.....	28
10	FIRST INSTALLATION RECOMMENDATIONS	29
10.1	POWER SUPPLY CABLE	29
10.1	PROTECTION AGAINST LIGHTNING - NUMERAZIONE	29
10.2	VENTILATION.....	29
11	WOLF 2MS INSTALLATION NOTE AND FIRST STEP.....	30
11.1	IMPORTANT NOTE ON USER NAME AND PASSWORD.....	31
11.2	HOW TO SHUT DOWN WOLF 2MS	32
12	WOLF 2MS GENERAL DESCRIPTION	33
12.1	WOLF 2MS BLOCK DIAGRAM	33
12.2	WOLF 2MS FRONT PANEL	34
12.3	WOLF 2MS REAR PANEL.....	35
12.4	WOLF 2MS DISPLAY AND LED PANEL	37
12.4.1	Tuner Module-1 Zone Functionality	37
12.4.2	Audio Streaming Module-1 Zone Functionality	38
12.4.4	Tuner Module-2 Zone Functionality	39
12.4.5	GPIO Zone Functionality.....	40
12.4.6	Time and Date Zone Functionality.....	40
12.4.7	Alarms Panel Zone Functionality.....	41
12.4.8	Headphone Panel Zone Functionality.....	42
12.4.9	LAN-1 Page Functionality (How to set the TCP/IP ETH-1)	42
12.4.10	LAN-2 Page Functionality (How to set the TCP/IP ETH-2)	43
12.4.11	IMPORTANT NOTE.....	43
13	WOLF 2MS WEB PAGE.....	44
13.1.1	The Home web page.....	44
13.1.2	NTP Time and Date Synch in Wolf 2MS.....	45
13.1.3	LOGIN into WOLF2MS	47
13.1.4	Tuner-1 Data – Main Webpage.....	48
13.1.5	Deviation, Imbalancement and MPX Power	50
13.1.6	RDS Group Transmission Alarm.....	50
13.1.7	The Alternative Channel and the Adjacent Channel	52
13.1.8	Tuner-1 Data – AF01-32 AF33-64.....	53
13.1.9	Tuner-1 Data – The EON page	55
13.1.10	The STATS page.....	56
13.2	SETUP	58
13.2.1	MAIN -1 Page	58
13.2.2	MAIN -2 Page	60
13.2.2.1	SMTP SETTINGS – EMAIL NOTIFICATIONS	62
13.2.3	Note about NTP Settings and behavior	64
13.2.4	Note about Activity Heart Signal.....	65
13.2.5	NMS 1-2 Page.....	66
13.2.6	NMS 3-4 Page.....	67
14	THE ADMIN PAGE	68
14.1	HOW TO LOGIN IN WOLF 2MS	68
14.2	HOW TO ADD A NEW USER.....	69
14.2.1	Consideration on Username and Password	69
14.3	THE ADMINISTRATION TOOLS.....	69
14.3.1	The User Right Management – How to change a Password	69
14.3.2	The User Right Management – How to enable/disable features	70
14.3.3	How to logout a user from Wolf 2MS.....	70
14.4	GENERAL CONSIDERATION ABOUT USER LOGGED IN AND NON LOGGED	71
14.5	DATA EXPORT AND IMPORT	72
14.5.1	On SD Card.....	72
14.5.2	Using web browser.....	72
14.5.3	Network section.....	73

14.6	SETTINGS – TUNER 1	73
14.6.1	Tuner-1 – Main	74
14.6.2	Tuning Mode	74
14.6.3	Smart Scan	74
14.6.4	Deemphasys	75
14.6.5	External Attenuator	75
14.6.6	Global Tuner Mask Mode	75
14.6.7	The meaning of “Mask” on each single parameter under control	76
14.6.8	RFL2	80
14.6.9	RFL1	82
14.6.10	RFH1	84
14.6.11	RFH2	86
14.6.12	DEV (Maximum Deviation allowed)	88
14.6.13	PILOT LOW (19kHz Pilot Stereo level)	91
14.6.14	PILOT (19kHz Pilot Stereo level)	92
14.6.15	RDS Low (57kHz RDS Data Level)	95
14.6.16	RDS (57kHz RDS Data Level)	96
14.6.17	Audio DEV (Silence detector)	99
14.6.18	Audio Left (Silence detector)	101
14.6.19	Audio Right (Silence detector)	102
14.6.20	Audio MS (Mono Silence)	103
14.6.21	Audio SI (Stereo Imbalance)	104
14.6.22	RDS PI (Program Identifier)	105
14.6.23	RDS PS (Program Service)	107
14.6.24	Note 1: Particular case for PS check	108
14.6.25	Note 2: PS Settings	109
14.6.26	RDS TP (Traffic Program)	110
14.6.27	RDS TA (Traffic Announcement)	111
14.6.28	RDS CT (Real Time Clock)	112
14.6.29	Particular case for RDS CT - Real Time Clock	113
14.6.30	RDS RT (RadioText)	114
14.6.31	RDS AF (Alternative Frequency)	115
14.6.32	RDS EON (Enhance Other Network)	116
14.6.33	RDS IH (In-House)	117
14.6.34	RDS TMC (Traffic Message Channel)	118
14.6.35	RDS RT+ (Radio Text Plus Service)	119
14.6.36	RDS ODA1 and ODA2	120
14.6.37	RDS BLER (Block Error Ratio)	121
14.6.38	RDS Group Transmission Alarm	122
14.6.39	RDS FILTERS	124
14.6.40	Example 1 - PI with regional variations	126
14.6.41	Example 2 - Control TA / TP	128
14.6.42	Example 3 - Control EON AF presence of specific IP	129
14.6.43	Example 4 - Control of the toggle A / B flag	130
14.6.44	Example 5 - Transparent Data Channel	131
14.6.45	Example 6 - Recording TMC	132
14.6.46	Example 7 - Alert C on TMC	133
14.1	AUDIO 1 - SETUP	134
14.2	AUDIO 2 - SETUP	135
14.3	ANALOG AUDIO INPUT SETUP	136
14.4	DIGITAL AUDIO INPUT SETUP	137
15	WOLF 2MS SCAN AND SMART SCAN MODE	138
16	TECHNICAL APPENDIX	139
16.1	APPENDIX A - BALANCED AUDIO AND PINOUT CONNECTION	139
16.2	APPENDIX B - USB A/B CONNECTION	139
16.3	APPENDIX C – ETHERNET / LAN CONNECTION	140
16.4	APPENDIX D – SERIAL CONNECTION	140
16.5	APPENDIX E - GPIO PORT	141
16.6	APPENDIX F – WOLF 2MS UPGRADE PROCEDURE	142
16.6.1	Note about upgrading from rel 0.4.1 – 0.4.7	143
16.7	APPENDIX G – WOLF 2MS CONSIDERATION ON FW REL 1.2.1	145
16.8	APPENDIX H – WOLF 2MS TEST PROCEDURE AND CONSIDERATION	146
16.9	SYNCH TO PC TIME	147
16.10	NTP	148
16.11	NORMAL ACTIVITY TRAP	149
16.11.1	RF-L2 Monitor test (Tuner-1 Tuner-2)	150
16.11.2	RF-L1 Monitor test (Tuner-1 Tuner-2)	153

16.11.3	RF-H1 Monitor test (Tuner-1 Tuner-2)	155
16.11.4	RF-H2 Monitor test (Tuner-1 Tuner-2)	157
16.11.5	Frequency Deviation Test (Tuner-1 Tuner-2)	159
16.11.6	Pilot Level – Low and Windows combined Test (Tuner-1 Tuner-2)	163
16.11.7	RDS Level – Low and Windows combined Test (Tuner-1 Tuner-2)	167
16.11.8	MPX Audio Deviation Test (Tuner-1 Tuner-2)	171
16.11.9	Audio Left/Right level Test (Tuner-1 Tuner-2)	174
16.11.10	Smart Scan General Description	177
16.11.11	RDS PI Data test (Tuner-1 Tuner-2)	179
16.11.12	RDS PS Data test (Tuner-1 Tuner-2)	181
16.11.13	RDS TP Data test (Tuner-1 Tuner-2)	185
16.11.14	RDS TA Data test (Tuner-1 Tuner-2)	187
16.11.15	RDS CT Data test (Tuner-1 Tuner-2)	190
16.11.16	RDS RT Data test (Tuner-1 Tuner-2)	194
16.11.17	RDS EON Data test (Tuner-1 Tuner-2)	199
16.11.18	RDS BLER Data test (Tuner-1 Tuner-2)	201
16.11.19	Audio Streaming	203
16.11.20	Note about event failure sampling	205
16.11.21	RDS InHouse (Tuner-1 Tuner-2)	206
16.11.22	RDS TMC (Tuner-1 Tuner-2)	209
16.11.23	RDS RT+ (Tuner-1 Tuner-2)	212
16.11.24	RDS ODA-1 ODA-2 (Tuner-1 Tuner-2)	215
16.11.25	SMTP	219
16.11.26	RDS Streaming	221
16.11.27	Traps and email notification with analogical or digital inputs	222
16.11.28	Format and Import/Export configuration	224
17	TECHNICAL SPECIFICATION WOLF 2MS	226
18	WEEE Directive – Informativa RAEE	229
19	WARRANTY	230
	WOLF 1MS DECLARATION OF CONFORMITY	239
	WOLF 2MS DECLARATION OF CONFORMITY	240
	WOLF 1MS DICHIARAZIONE DI CONFORMITA'	241
	WOLF 2MS DICHIARAZIONE DI CONFORMITA'	242

1 INTRODUCTION

1.1 AVAILABLE MODEL

CODE#	MODEL	COMMERCIAL DESCRIPTION
A110160001	WOLF 2MS	Dual FM monitoring system for FM networks. Double internal tuner with configurable band scan. Real time measures on RF, MPX, Audio and RDS with decoder with group sequence. HTTP, SNMP, FTP and XML protocol. Web server, double audio streaming for monitor. 2x LAN, USB and GPIO. Headphone output.
A110160020	WOLF 1MS	Monitoring system for FM networks. Internal FM tuner with configurable band scan. Real time measures on RF, MPX, Audio and RDS decoder with group sequence. HTTP, SNMP, FTP and XML protocol. Web server and audio streaming for monitor. 2xLAN/USB and GPIO. Headphone output and universal power supply.

1.2 USE OF THIS MANUAL

This manual can be used with the Wolf 1MS and Wolf 2MS products. Some features may be changed without notice.




1.3 REVISION HYSTORY AND NOTES

Rev.	Note	Date	Sign	Change / Description
1.0.3		23 May 2014	Gabriele Rocchini	User Manual updating from 0.8.5 to 1.0.3

2 GENERAL DESCRIPTION

WOLF 1MS & 2MS

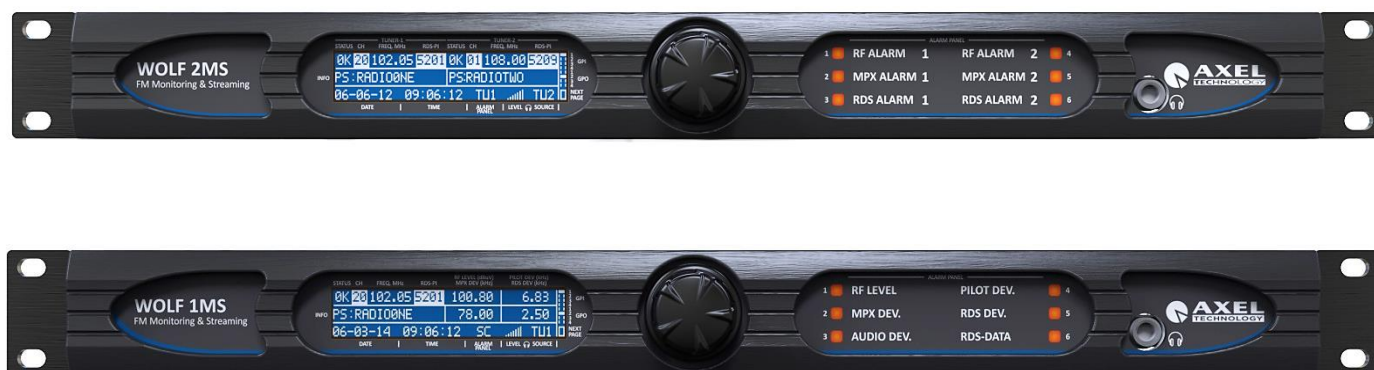

FM OFF AIR MONITOR SYSTEM *Rev 4.8*

HIGHLIGHTS

- Real Time measurement for FM networks
- Single/double high quality FM Tuner
- Signal analysis modules: RF, MPX, AUDIO and RDS
- High invulnerability to strong RF fields
- Configurable single/bandscan for each FM tuner
- Embedded web server for worldwide consultation
- Single/double AoIP streaming for monitoring with IceCast2 Server
- Single/double RDS decoder with group sequence decoding
- SNMP, HTTP web interface, FTP, NTP and email supported
- Double Ethernet/USB ports, LCD display and headphone out

PRODUCT OVERVIEW

Wolf 2MS is a state-of-the-art monitoring system, designed to supervise FM air signals. The accuracy of the onboard twin tuners allows a very rigorous frequencies scan, high performances in FM reception, MPX audio encoding and RDS data streaming. This cutting-edge equipment features three main operating modes: continuously reception, bandscan and *smart bandscan*.

The FM static modality allows to focus on a single channel, selected and monitored exclusively. Scan mode implies that up to 32 channels for each tuner can be scanned and supervised in a single analysis. Receiving up to 64 memories in total, Wolf 2MS allows a complete and accurate scrutiny of RF, MPX, RDS, Audio and RDS data dynamic services. In smart mode the channel scan time is adjusted automatically according to instantaneous measurements requirements.

Outstanding quality of Wolf 2MS is the integration into a Network Management System. Supporting SNMP protocol, all data and information captured during FM monitoring are graphically displayed on any kind of web interface. For simplest configurations not requiring NMS software, Wolf 2MS can send via email a daily report of the 24 hours events. Wolf 2MS provides a database sheet to manage this information.

Two built-in audio streamers are an essential feature of Wolf 2MS; audio channels can be streamed to a remote logging system that records both audio and data coming from the transmitter site. The audio stream can also be sent to a remote player for audio-on-demand purposes. From any site users can listen to each single FM tuner and streamed audio, using any Internet browser.

Two onboard network interfaces provide maximum flexibility in streaming and connectivity processes. From PCs, tablets and smartphones broadcasters can control completely Wolf 2MS and access all data and alarms. When an alarm rises, it is the NMS system that sends notifications via SMS or email or takes an action to fix any possible issue.

External input sources are available: analog Left+Right and digital AES/EBU inputs. Users can connect audio to the external input sources that should be under control. These audio inputs are constantly monitored: silence detection, and audio presence. Thorough tests, performed also by end users, showed that Wolf 2MS circuits are extremely safe and completely unaffected by any kind of radiofrequency interferences

TECHNICAL DESCRIPTION

Wolf 1MS and Wolf 2MS are FM monitoring systems designed for FM Off Air signal monitoring purpose. Wolf 1MS is provided with one high quality FM tuner, while Wolf 2MS allows the broadcaster to receive up to two frequencies thanks to internal double tuner. Tuners are each other independents and they can operate in three ways: *Continuous reception*, *bandscan* and *SmartScan*.

Internal tuner assures strong performances in FM reception, RF and MPX audio analysis and RDS data stream output. The monitoring made on FM channels can be a basic RF analysis or an advanced RF, MPX and AUDIO measurement.

- *Continuous reception*: a single carrier is selected and under monitoring.
- *Bandscan mode*: a total of 32 FM Channels can be scanned and monitored in Wolf 1MS and 64 FM Channels for Wolf 2MS. The *bandscan* time is also user definable, in a range from 1 second up to 10 seconds for each channel.
- *SmartScan* mode allows an intelligent and variable scan time that is adjusted automatically to fit the instantaneous measurement requirements. This is to avoid false-positive rising errors.

During *continuous reception* mode, each single tuner checks and completely decodes the multiplexed signal: Mono level, Pilot level, Audio and RDS levels are measured and kept always under control. All captured datas during FM Channel monitoring can be sent to a Network Management System (such as Axel Technology's *Ranger*) or showed in a common password protected web page. Communication between *Wolf 2MS* and *Ranger NMS* is SNMP v2C protocol. For all single parameter under monitoring, a threshold can be set. If one or more values go out of range, alarms are delivered.

Tuners modules are with extended RF input range from 11dBuV to over 120dBuV through an internal programmable attenuator. FM monitor will be able to work nominally at its best with strong RF levels from 80dBuV to over 120dBuV coming from an RF combiner. RF sensitivity of 20-30dBuV will be still available for the use as audio and RDS-UECP re-broadcaster.

Once the RF signal is received, audio should be streamed from the transmitter site back to a remote logging system. The streamer input allows an internal selection between all inputs available: Tuners, External Analog In, External AES/EBU In.

Wolf 1MS and Wolf 2MS are completed with *“External Input”* source: analog Left+Right input and Digital Left+Right in AES/EBU format. This audio input is continuously monitored: silence detection (Threshold/time and level), left and right presence, peak left, peak right. Rear-panel audio output always presents the audio decoded from Tuner-1 or Tuner-2 and this setting is user definable while audio is available on Analog or AES/EBU format.

Wolf 1MS and Wolf 2MS provide a large variety of connection: double Ethernet port, USB and front panel headphone output, 4x GPIIn opto coupled and 4x GPOut over relays. Rs232 serial port for RDS-UECP bridging and rebroadcasting purposes, and rear panel placed SD card to store or recall the complete equipment configuration.

RF antenna inputs are over BNC connectors, a XLR balanced stereo analog input and output, AES/EBU input and output. OS and datas are loaded and stored over solid state memory as SD and flash RAM. Universal switching power supply to operate worldwide, 1 rack unit space in fan-less configuration.

MEASURES AND COMPARISON TABLE


<i>General features</i>	<i>Wolf 1MS</i>	<i>Wolf 2MS</i>	
Number of FM tuners on board	1	2	
FM channels under monitor	32 Channels	64 FM Channels (32 FM/Tuner)	
Scanning mode	Single, Bandscan and <i>SmartScan</i>		
Streaming available	1	2	


<i>Field</i>	<i>Type of measure</i>	<i>Measures made by Wolf 1MS –Wolf 2MS</i>	<i>U.M</i>
RF	4x RF Level Lower threshold	Measure, alarm via email/trap SNMP	dBμV
	2x Adjacent Channel L1 threshold		
	Alternative Channel - Worse	Measure	dBr
	Carrier precision	Measure	ppm
	Multi Path	Measure	%

MPX	Deviation Max	Measure, alarm via email/trap SNMP	kHz/dBr
	2x Pilot Lower level - 2 threshold level		
	MPX Power – ITU-R BS.412		
RDS Level	RDS Level Lower threshold		
	RDS Level Higher threshold		

AUDIO	Peak Left - Peak Right threshold	Measure, alarm via email/trap SNMP	dBr
	RMS Left - RMS Right threshold		
	Audio Imbalance – L/R delta threshold		
	Mono silence – L+R threshold	Measure, alarm via email/trap SNMP	kHz
	Audio MPX deviation threshold		
	Audio MPX Silence detection threshold	Measure, alarm via email/trap SNMP	s
	Audio Left –Right Silence det. threshold		

RDS Data	AF-Complete Decoding + Visualization PS – 4 PS matching reference PI – 3 PI Code matching reference CT – Time offset DI – Decoder Information PTY – Program Type TP/TA – timeout TA M/S – Music Speech BLER – Block Error Rate TMC – AID – Group – Data EON Enhance Other Channel RT – RT+ data decoding LA – EG – ILS – LSN-PIN ODA TMC ODA RT+ ODA-1 ODA-2 SLC0 – SLC1 - SLC2 - SLC3 - SLC4 - SLC5 - SLC6 - SLC7	RDS Data decoding group, visualization and storage. Alarm generation in case of error, can be showed in a common web page or delivered via email. Interfacing with up to 4 NMS allows equipment to deliver traps using SNMP protocol.	
-----------------	---	--	--

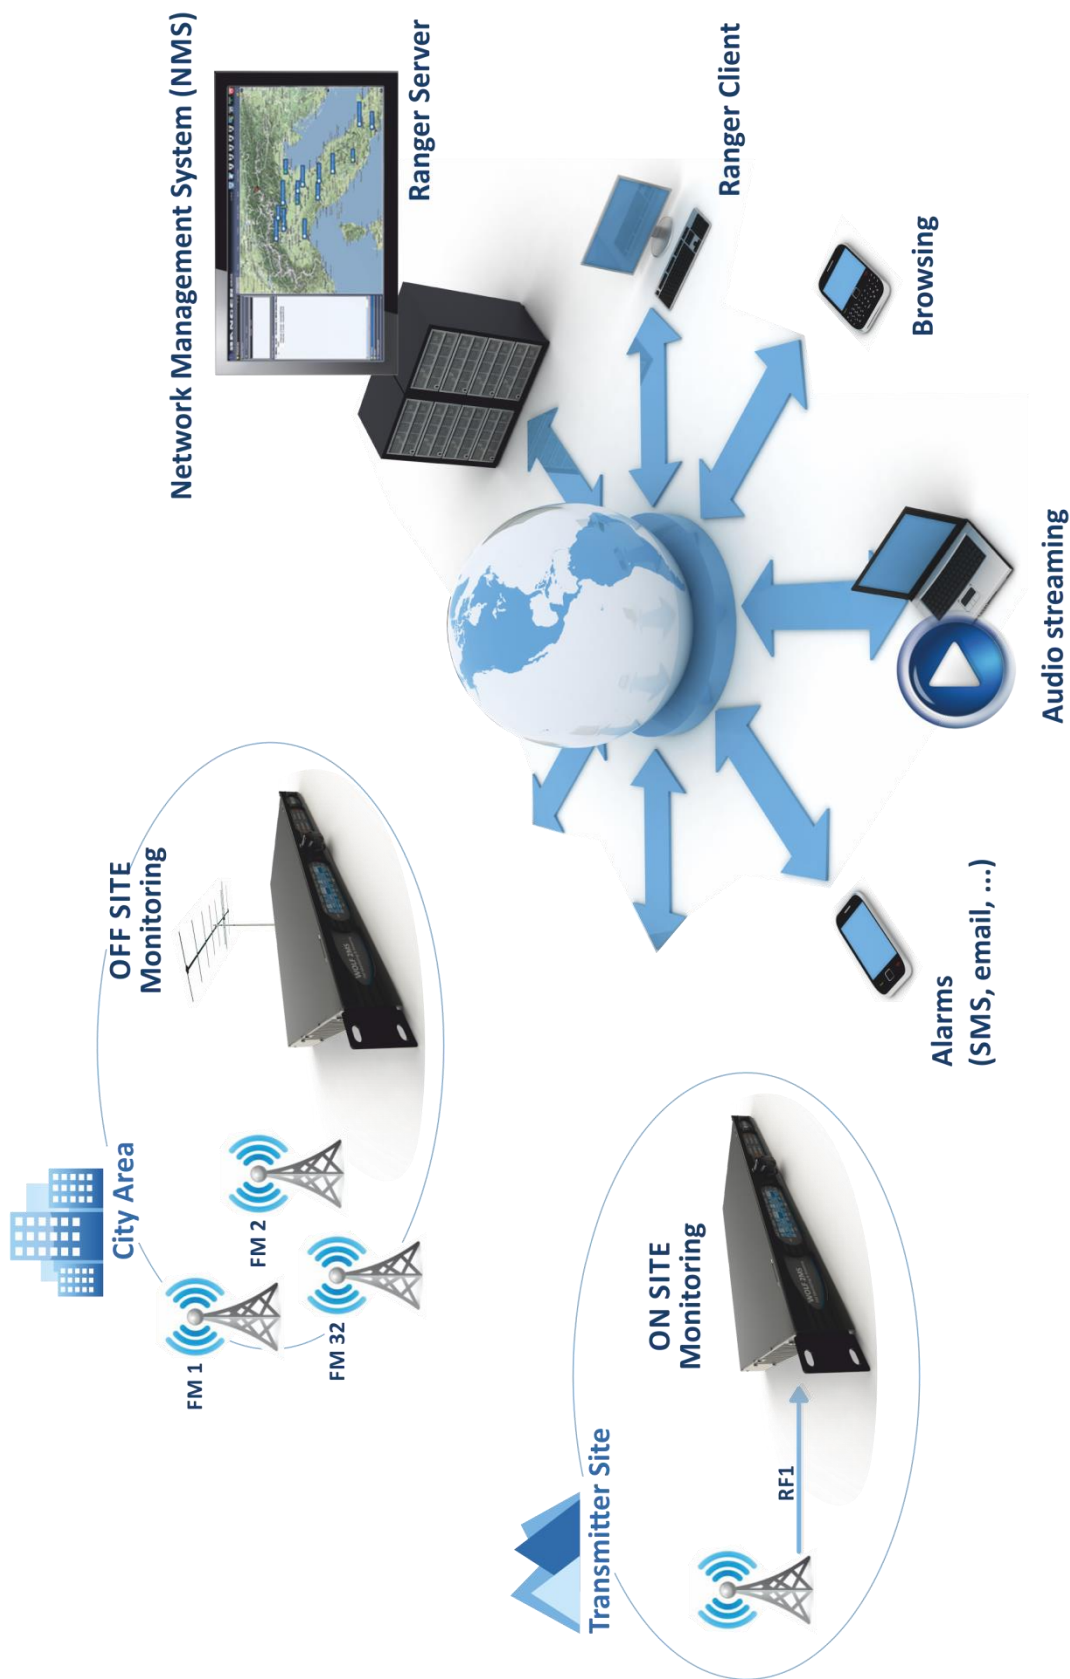

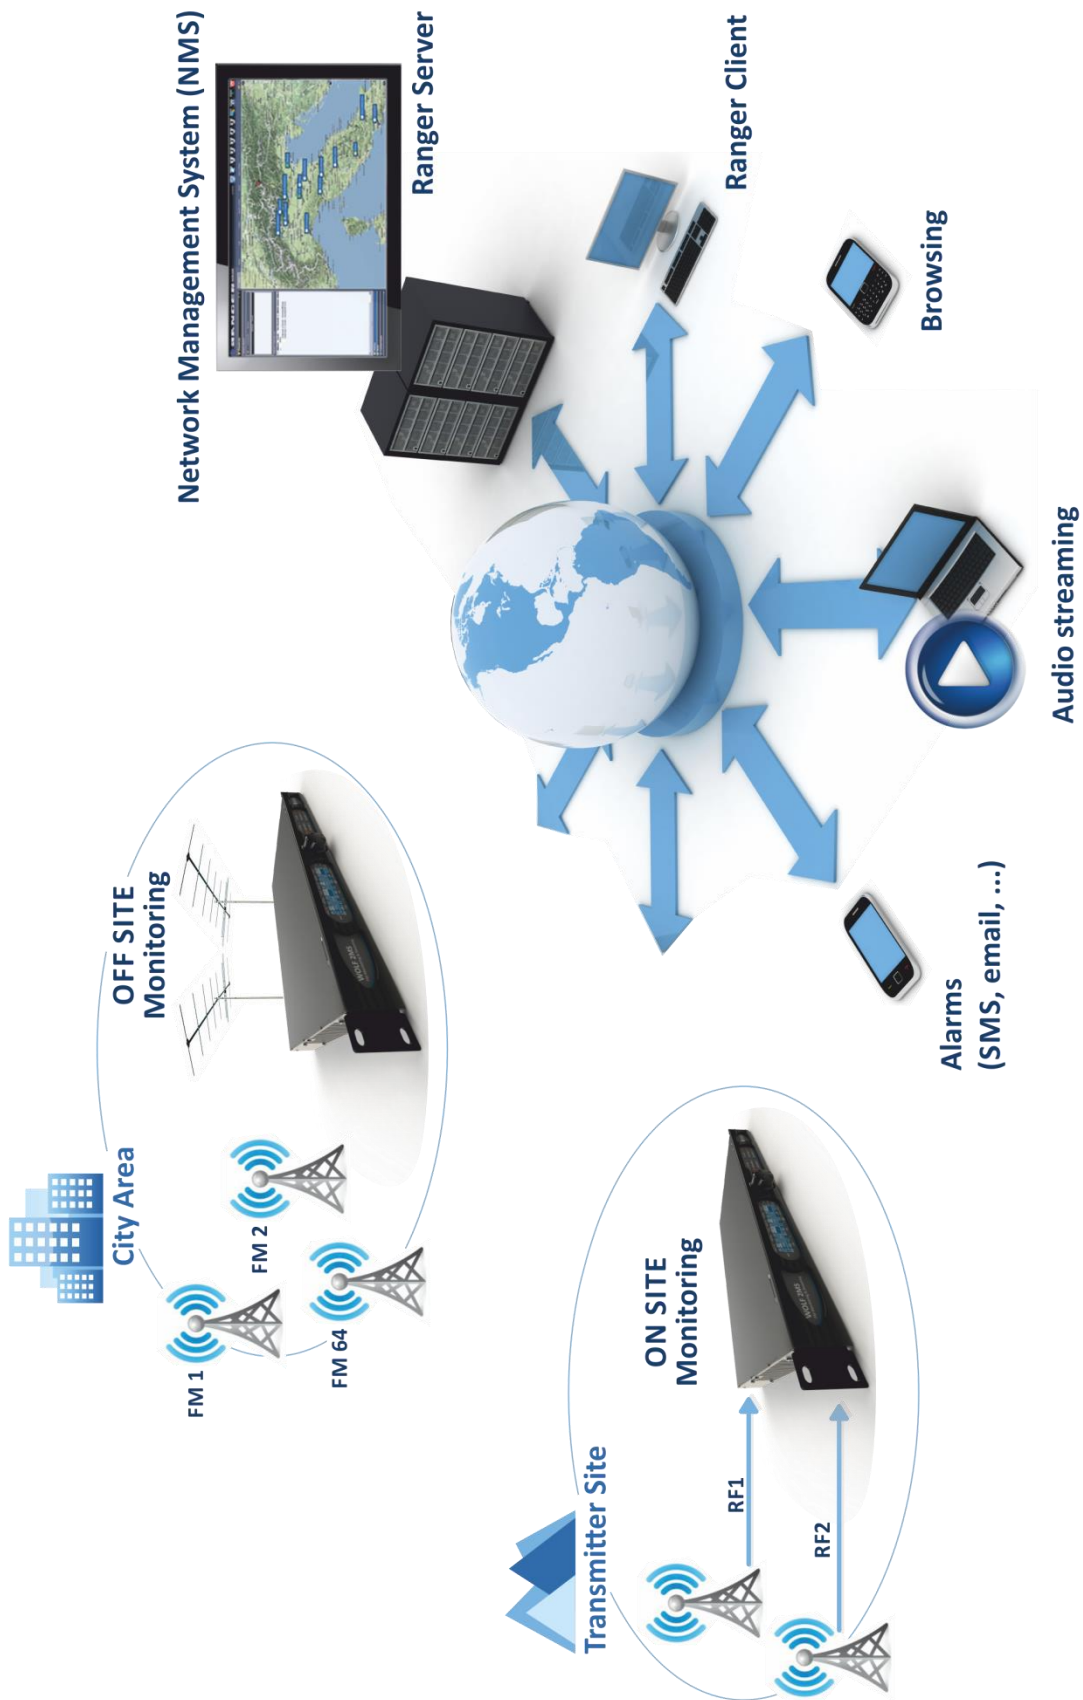

FRONT- REAR PANEL DETAIL

In the left side display the first row is divided for *TUNER-1* and *TUNER-2* frequency and RDS-PI code. The STATUS field indicates the condition (status) of the frequency under control. The scan value indicates the scanned frequency and all the related value, frequency in MHz and PI code, this scan value (01-02-... up to 32) rotate around each 5 seconds. Same behavior for the Tuner-2.



Wolf 2MS – Front Panel

INFO row shows some information about Wolf 2MS shown such as PS for Tuner-1 and PS for Tuner-2 about the frequency under control, or the set of *bandscan* frequency. Last row shows date & time and *ALARM PANEL*.

If TU1 is set in the *ALARM PANEL* field, the right side 6 leds panel shows if lighted on the alarms related to Tuner -1. Same for Tuner -2.



Wolf 2MS – Rear Panel

Wolf 1MS shows some differences between Wolf 2MS in particular about right 6 leds panel side. Accordingly to one RF tuner it is possible for Wolf 1MS to report about more alarms related to a single frequency under control. PS, PI Code and frequency are showed into 3 rows LCD display, moreover each single RF and MPX component such as deviation, RF level, Stereo Pilot and RDS deviation are clearly reported.



Wolf 1MS – Front Panel

Back side Wolf 1MS and Wolf 2MS allows a large variety of connection, AES/EBU and analog balanced input/output connections are provided over standard XLR connectors. Double Ethernet and USB –A type port make Wolf 1MS and Wolf 2MS equipment perfectly matching the most demanding broadcast market application. Furthermore GPIO opto coupler Input and relay output provides a seamless integration with 3rd party equipment. RDS decoded data in UECP format can be given back over SubD 9p female connector, for rebroadcasting purposes.



Wolf 1MS – Rear Panel

WOLF 1MS – WEB PAGE

The screenshot displays the Wolf1MS web interface, which is divided into several functional sections. At the top, there's a navigation bar with 'Monitoring' and 'Tuner' tabs. The main content area is organized into three primary columns: General Information, Tuner settings, and Audio Spectrum Analyzer.

General Information: This section includes fields for Name (WOLF1MS), Location, IP-ETH1 (010.000.127.112), IP-ETH2 (048.087.080.165), Date (03/04/14), Time (15:23:36), GPO (0), GPI (0), Release Firmware (0.8.12), Release WebApp (0.8.12), Proxy Mode (Disabled), and User Name (admin).

Tuner-1: This section shows the current tuning parameters. It includes a 'STEREO' button, a 'TUNED' indicator, and a 'RDS' button. The 'Frequency' is set to 104.20 MHz, and the 'Mode' is STATIC. The 'Channel Label' is 'RDS via Dorsale'. The 'RF' section shows 'L2', 'L1', 'ALARM', 'H1', and 'H2' indicators. The 'Level' is 66.00 dBuV, and the 'Carrier' is 4 ppm. The 'M/Path' is 1.75 %, and the 'Adj-Chan' is -17.87 -17.62 dB. The 'Alt-Chan' is -20.75 dB. The 'DEVIAION' section shows 'MPX' at 91.66 kHz and 'Pilot' at 6.99 kHz. The 'RDS DATA' section shows 'PI' at 5264, 'BLER' at 004, 'PS' at %, 'TP' at ON, 'TA' at OFF, 'M/S' at DI, 'PTY' at VARIO, 'CT' at GROUPS, 'MUSIC' at STEREO STATIC, 'AF' at EON, 'IH' at OK, 'OK' at OK, 'TMC' at RT+, 'ODA-1' at ---, and 'ODA-2' at ---.

Audio Spectrum Analyzer: This section displays a frequency spectrum plot. The x-axis represents frequency in kHz, ranging from 0 to 16.0 kHz. The y-axis represents amplitude in dB, ranging from -70 to +10. The plot shows a significant signal at approximately 1.75 kHz, with a peak level of about -10 dB. The 'AUDIO-1' section shows 'Source' as TUNER1, 'Imbalance' as 0.3 dB, 'Mono' as -3.2 dB, 'Peak-L' as 1.1 dB, 'Peak-R' as 1.0 dB, 'RMS-L' as -3.3 dB, and 'RMS-R' as -3.2 dB.

PLAYER: This section includes a 'Streaming Information' button and a 'Countdown' button. The 'Listening AUDIO-1 (vorbis / 96kbps / stereo)' section shows 'Countdown' as OFF.

WOLF 2MS – WEB PAGE

Wolf2MS

10.127.2

Impossibile collegarsi a 10.127.2

Setup Admin Tuner-1 Tuner-2 Audio Logout

GENERAL INFORMATION

Name	IP-Eth1	Date	GPO	Release Firmware	Release WebApp
Anzola Emilia	192.168.050.202	03/04/14	0 1 2 3	0.8.12	0.8.12
Location	IP-Eth2	Time	GPI	Proxy Mode	User Name
Gabry	010.000.127.002	15:28:56	0 1 2 3	Disabled	admin

TUNER-1

STEREO TUNED RDS

Ch. Mem.	Frequency	Channel Label	Mode
9	97.90 MHz	Radio Dimensione Suono	STATIC

RF

Level	Carrier	M.Path	Adj-Chan	Alt-Chan
51.62 dBuV	4 ppm	4.12 %	-25.62 -18.75	-24.75

DEVIATION

MPX	Audio	Pilot	RDS
79.19 kHz	70.29 kHz	6.08 kHz	2.82 kHz

RDS DATA

PI	BLER	PS	TP	TA
5264	007	% * RDS +	ON	OFF
M/S	DI	PTY	CT	GROUPS
MUSIC	STEREO STATIC	VARIED	OK	OK
RT	AF	EH	TMC	RT+
OK	NO	NO SERV	NO SERV	NO SERV
			ODA-1	ODA-2
			NO SERV	NO SERV

TUNER-2

STEREO TUNED RDS

Ch. Mem.	Frequency	Channel Label	Mode
1	100.80 MHz	TX	STATIC

RF

Level	Carrier	M.Path	Adj-Chan	Alt-Chan
90.00 dBuV	1 ppm	0.00 %	-51.37 -50.62	-80.50

DEVIATION

MPX	Audio	Pilot	RDS
0.45 kHz	0.04 kHz	0.00 kHz	0.00 kHz

RDS DATA

PI	BLER	PS	TP	TA
---	---	%	---	---
M/S	DI	PTY	CT	GROUPS
---	---	---	---	---
RT	AF	EH	TMC	RT+
---	---	---	---	---
			ODA-1	ODA-2
			---	---

AUDIO-1

ALARM

Source	Imbalance	Mono	Peak-L	Peak-R	RMS-L	RMS-R
TUNER1	0.0 db	-4.9 dBr	0.2 dBr	0.3 dBr	-4.9 dBr	-5.0 dBr

L R

Streaming Information

Listening AUDIO-1 (vorbis / 192kbps / stereo)

Countdown

OFF

AUDIO-2

ALARM

Source	Imbalance	Mono	Peak-L	Peak-R	RMS-L	RMS-R
TUNER2	0.3 db	-79.6 dBr	-67.0 dBr	-67.0 dBr	-79.7 dBr	-79.5 dBr

L R


Streaming Information

Ready

Countdown

OFF

WOLF 1MS – WOLF 2MS BLOCK DIAGRAM

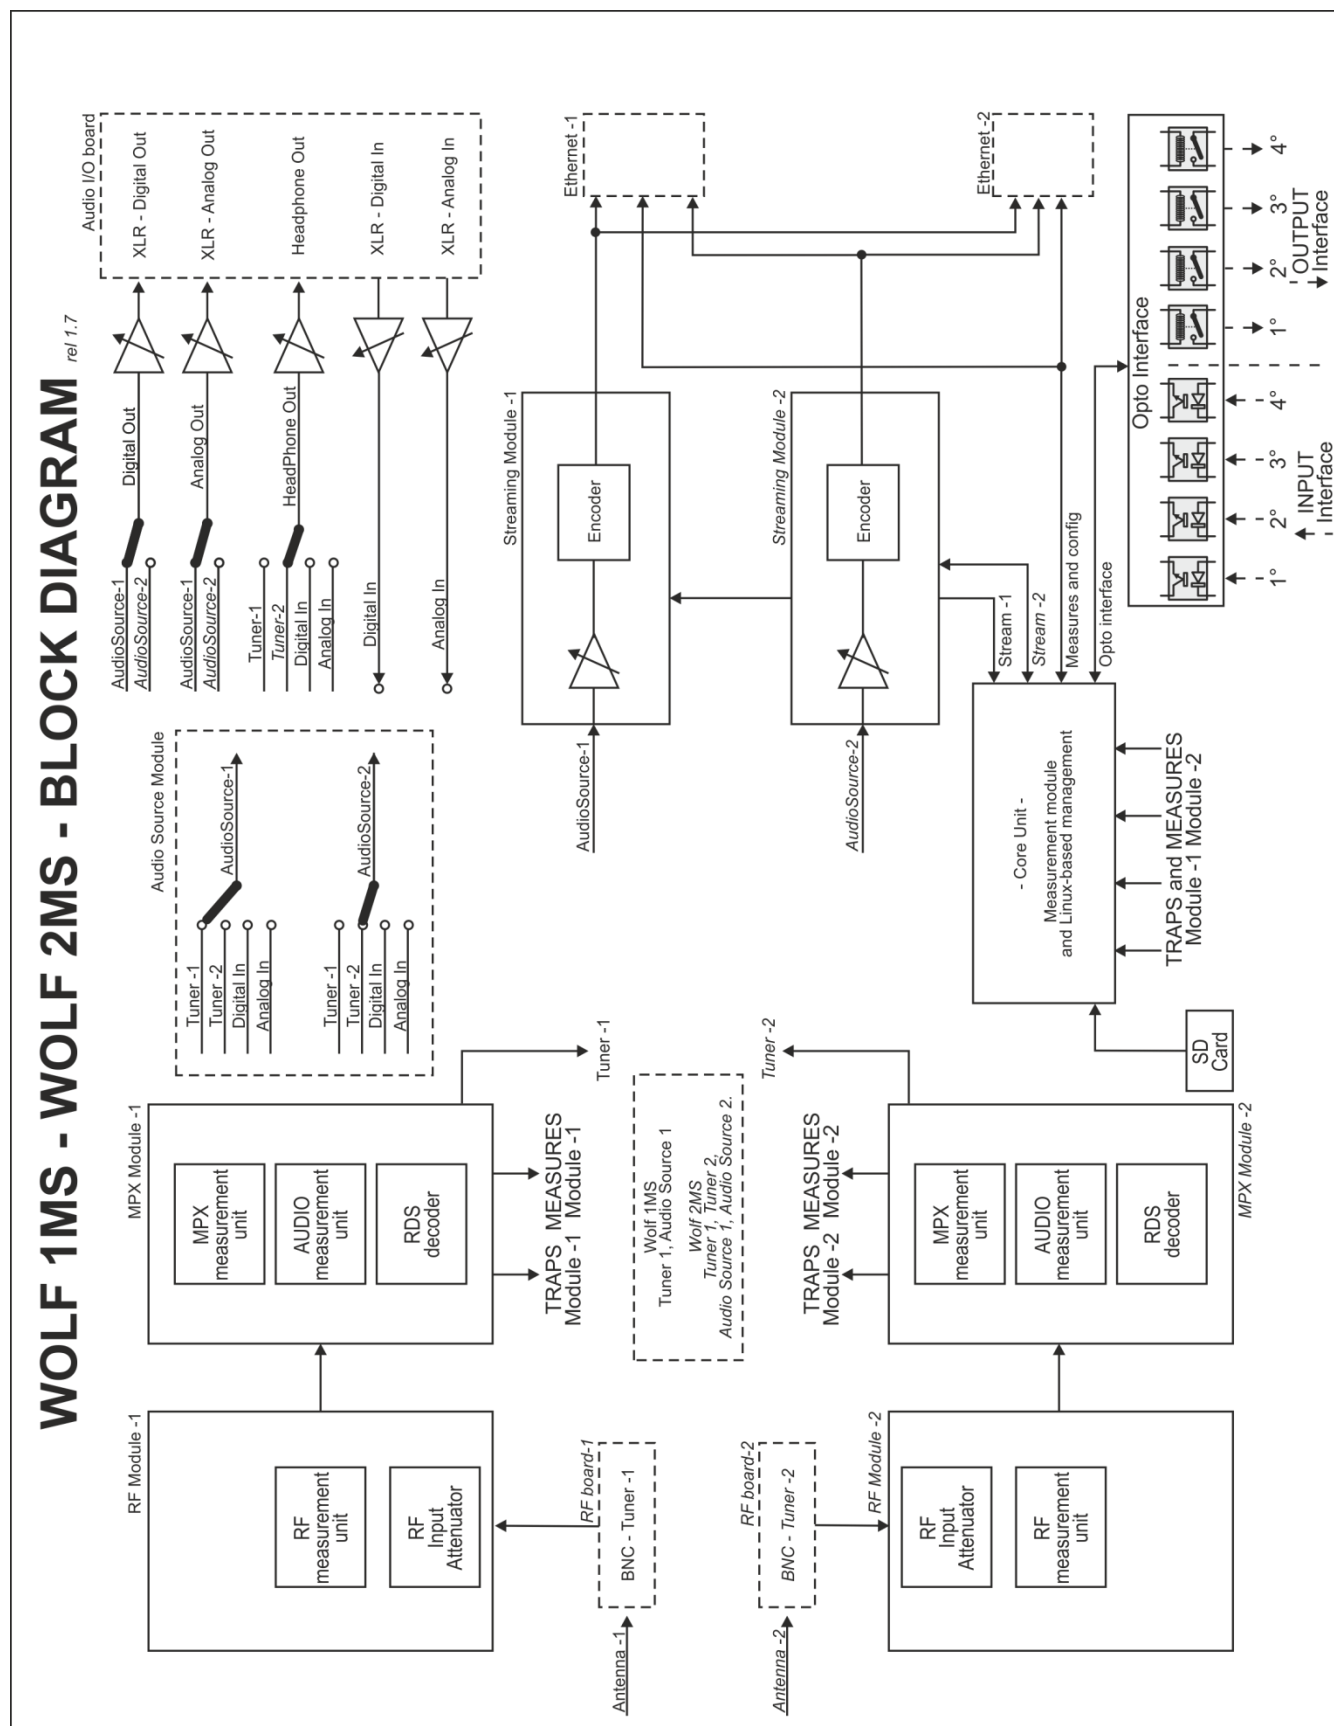

TECHNICAL SPECS

PARAMETER	DESCRIPTION
Main Power	100 Vac – 240 Vac 50/60 Hz internal, universal power supply
Power consumption	25 W
Power connector	IEC plug filter with internal fuse 2.0 AT
Headphone	Stereo Jack 6.3 mm
Safety and EMC	Compliant to CE laws
Working temperature	0° to 50° C (storage -5 to + 50 °C)
Housing Dimensions	19 inch x 1u x 240 mm (depth)
Weight	3.5 kg
RF TUNERS	
Tuner frequency	87.5 MHz - 108.0 MHz
Tuner step	10 kHz
RF tuning stability	+/- 500 Hz
RF input sensitivity	20 to 120 dBμV
RF input nominal level	80 to 100 dBμV
RF inputs main	2x BNC, with 50 Ohm unbalanced
Max frequency deviation	125 kHz
IF Filter bandwidth	34 kHz to 138 kHz – Manual or Automatic
Input RF level	30 dBμV – 120 dBμV with Internal attenuator
Bandscan carrier number	32 Channels
Bandscan time	Static Mode, Scan 2s to 20s and Smart Mode*
Selectivity at ± 120 kHz	> -3 dB
Selectivity at ± 200 kHz	> -40 dB
Selectivity at ± 300 kHz	> -50 dB
Selectivity at ± 400 kHz	> -65 dB
Image Rejection @ 22.5 kHz	70 dB
Adjacent channel rejection	63 - 65 dB
Alternate channel rejection	65 - 72 dB
THD @ dev=75 kHz	0.05 – 0.1 %
Mono (S+N)/N	75 dB typ – 68 dB min (No A-Weighting 30 Hz – 15 kHz)
STEREO DECODERS	
Stereo (S+N)/N	• 61 dB Stereo/61 dB Mono @ 40 dBμV • 65 dB Stereo @ 50 dBμV • 80 dB Stereo @ 70 dBμV
Pilot 19kHz suppression	55 dB (Stereo modulation L = 1, R = 0, Deviation=67.5 kHz, pilot deviation=6.75 kHz)
Stereo THD+N	Measures @ 70 dBuV with 75 kHz deviation • 100 Hz - 0.055 % • 1 kHz - 0.061 % • 5 kHz - 0.19 % • 10 kHz - 0.46 %
Stereo separation	45 dB (Stereo modulation L = 1, R = 0, Deviation=67.5 kHz, pilot deviation=6.75 kHz)

	• 48 dB @ 400 Hz • 48 dB @ 1 kHz • 48 dB @ 5 kHz • 38 dB @ 10 kHz • 38 dB @ 14.7 kHz
RDS DECODER	
RDS Sensitivity	20 dB μ V (dev f = 2 kHz, RDS BLER < 5%)
RDS Synchronization time	80 ms (dev f = 2 kHz RF input = 60 dB μ V)
RDS PI Lock time	100 ms (dev f = 2 kHz RF input = 60 dB μ V)
RDS data decoding and Streaming	RDS Level indication and deviation (voltage, kHz and dBr)
RDS Data decoding services	PS, PI, M/S, DI, TP, TA, AF, AF List Presence A/B Method, Scrolling PS, AF EON, Radio Text, Radio Text Plus, CT, PTY, PIN, IH, TMC, EWS, TDC . ODA generic services. RDS error detection with three shold adjustable
RF MEASUREMENT MODULE	Ranges – Resolution - Precision
RF Level	0 – 80 dB μ V (Resolution 1 dB μ V, precision 2 dB μ V) 82 – 120 dB μ V (Resolution 2 dB μ V, precision 5 dB μ V)
Deviation	0-125 kHz (Resolution 1 kHz, precision 2 kHz)
Tuned Carrier Frequency Offset	0-250 ppm (Resolution 2 ppm, precision 5 ppm)
Multipath	0-100 %
Adjacent Channel RF Level	0 – 80 dB μ V (Resolution 1 dB μ V, precision 2 dB μ V) (+-200kHz)
MPX MEASUREMENT MODULE	Ranges – Resolution - Precision
Pilot Level	0-20 kHz (Resolution 0.1 kHz, precision 0.2 kHz)
Rds Level	0-20 kHz (Resolution 0.1 kHz, precision 0.2 kHz)
Mpx Power ITU-R-BS412 (Estimated)	-20 dBr to + 12dBr (Resolution 0.1 dBr, precision 0.5 dBr)
Stereo	Valid Stereo signal detector
AUDIO MEASUREMENT MODULE	Ranges – Resolution – Precision
Left Quasi Peak	Programmable Attack Time from 0 mS to 2mS (Resolution 0.1 dB)
Right Quasi Peak	Programmable Attack Time from 0 mS to 2mS (Resolution 0.1 dB)
Audio Silence	Threshold -80 dB to 0 dB, Time: 1-120 Sec
Unbalanced Stereo Signal	Threshold -80 dB to 0 dB, Time: 1-120 Sec
AUDIO OUTPUT	
Available output on XLR	Tuner-1 or Tuner-2, definable via web page. Same audio on Analog and AES/EBU
Audio frequency response	30 Hz—15 kHz, $\pm$ 0,3 dB
Phones (Front Panel)	Stereo jack 6.3 mm, 150 Ohm, 0.8 W
ANALOG OUTPUT MODULE	
D/A Conversion	24bit Sigma-Delta Conversion – 32 kHz Sample rate
Connectors	2x XLR, male - Electronically balanced
Output Level	-12.0 dBu to +14.0 dBu (0.1 dBu Step) – Max (+20 dBu)
Impedance Source	47 Ω
Load Impedance	600 Ω or greater
Distorsion	Less than 0.02% TDH+Noise (0.0dBu @ 1Khz)
Dynamic range	108 dB (110 dB A-weighted, 20Hz – 15kHz)
Sources	Streamer1_Source , Streamer2_Source
DIGITAL OUTPUT MODULE	
Connectors:	XLR, Male – Electronically balanced
Format	AES3/EBU
Sample rates	32 kHz

Resolution	24 bits
Operative Nominal level:	From 0.0 dBFs to -24dBFs (0.1 dBu step)
Dynamic Range:	125 dB (Typ), 122 dB (Min)
Distortion	less than 0.01% TDH+NOISE (-20dBFs @ 1Khz)
Freq response	20Hz-15kHz
Dynamic range	108 dB
Sources	Streamer1_Source , Streamer2_Source
AUDIO INPUT	
Encoder Streaming Input source	User selectable between Tuner-1, Tuner-2, External Input Analog, External Input AES/EBU
DIGITAL INPUT MODULE	
Connectors:	XLR, female – Electronically balanced
Format	AES3/EBU
Sample rates	32 kHz / 44.1 kHz / 48 kHz / 96 kHz with src and jitter correction
Operative Nominal level:	From 0.0 dBFs to -24dBFs (0.1 dBu step)
Dynamic Range:	125 dB (Typ)
Distortion	less than 0.01% TDH+Noise (-20dBFs@ 1Khz)
Input Modes:	Stereo, Mono (Left), Mono (Right), Mono (Left+Right)
ANALOG INPUT MODULE	
A/D Conversion	24bit Sigma-Delta Conversion – 32kHz sample rate
Connectors:	XLR, female - Electronically balanced
AD Clipping Point	+20.0dBu
Operative Nominal Level:	From -12.0dBu to +12.0dBu (0.1dBu Step)
Line Impedance	10 kΩ (Electronically balanced selectable) EMI-suppressed
Distortion:	less than 0.02% TDH+NOISE (0.0dBu @ 1Khz)
AD Dynamic Range:	108 dB RMS (110 dB A-weighted, 20Hz - 15kHz)
Input Modes:	Stereo, Mono (Left), Mono (Right), Mono (Left+Right)
AUDIO & RDS STREAMING MODULES	
Protocols	UDP/RTP, TCP/IP, IceCast2
Encoders	OGG-VORBIS
Interface	Ethernet Port 10/100 Mb/s
Bitrate	User select 24 kbps to 192 kbps
Sample Rates	32Ksamples/sec
RDS Streaming	Proprietary redundant protocol over UDP or RAW-TCP/IP
Administration	User right management

ORDERING INFORMATION

CODE#	MODEL	COMMERCIAL DESCRIPTION
A110160020	WOLF 1MS	Monitoring system for FM networks. Internal FM tuner with configurable band scan. Real time measures on RF, MPX, Audio and RDS decoder with group sequence. HTTP, SNMP, FTP and XML protocol. Web server and audio streaming for monitor. 2x LAN/USB and GPIO. Headphone output and universal power supply.
A110160001	WOLF 2MS	Dual FM monitoring system for FM networks. Double internal tuner with configurable band scan. Real time measures on RF, MPX, Audio and RDS decoder with group sequence. HTTP, SNMP, FTP and XML protocol. Web server, double audio streaming for monitor. 2xLAN/USB and GPIO. Headphone output. Universal PSU

A110160020	WOLF 1MS	Système de surveillance pour les réseaux FM. Tuner interne pour band-scan configurable. Mesure en temps réel de RF, MPX, audio et RDS (séquence de décodage). HTTP, SNMP, FTP et XML. Serveur Web, double moniteur streaming audio. 2xLAN, USB et GPIO. Prise casque enface. Alimentation universelle
A110160001	WOLF 2MS	Double système de surveillance pour les réseaux FM. Double tuner interne pour band-scan configurable. Mesure en temps réel de RF, MPX, Audio et RDS (séquence de décodage). HTTP, SNMP, FTP-XML. Serveur Web, double moniteur streaming audio. 2xLAN, USB et GPIO. Prise casque enface. Alimentation universelle

3 SAFETY WARNINGS / ISTRUZIONI PER LA SICUREZZA

SAFETY WARNINGS

CONSIGNES DE SÉCURITÉ IMPORTANTES

ISTRUZIONI IMPORTANTI PER LA SICUREZZA

WICHTIGE SICHERHEITSHINWEISE

INSTRUCCIONES IMPORTANTES DE SEGURIDAD

(Rel. 1.6)

3.1 FOREWORD

For your own safety and to avoid invalidation of the warranty all text marked with these Warning Symbols should be read carefully.



Information in this manual is subject to change without notice and does not represent a commitment on the part of the vendor.

The manufacturer shall not be liable for any loss or damage whatsoever arising from the use of information or any error contained in this manual, or through any mis-operation or fault in hardware contained in the product.

It is recommended that all maintenance and service on the product should be carried out by the manufacturer or its authorised agents. The manufacturer cannot accept any liability whatsoever for any loss or damage caused by service, maintenance or repair by unauthorised personnel.

4 SAFETY WARNINGS

The installation and servicing instructions in this manual are for use by qualified personnel only.

- **Read All Instructions.** All safety and operating instructions must be read before operating the product. They also must be retained for future reference, as it contains a number of useful hints for determining the best combination of equipment settings for Yr particular application.
- **Heed All Warnings.** All warnings on the product and those listed in the operating instructions must be adhered to.
- **Heat.** This product must be situated away from any heat sources such as radiators or other products (including power amplifiers or transmitters) that produce heat.
- **Power Sources.** This product must be operated from the type of power source indicated on the marking label and in the installation instructions. If you are not sure of the type of power supplied to your facility, consult your local power company. Make sure the AC main voltage corresponds to that indicated in the technical specifications. If a different voltage (ex. 110/115 VAC) is available, open the equipment closure and set the voltage switch on the main supply circuit, located behind the AC socket
- **Power Cord Protection.** Power supply cords must be routed so that they are not likely to be walked on nor pinched by items placed upon or against them. Pay particular attention to the cords at AC wall plugs and convenience receptacles, and at the point where the cord plugs into the product
- **Use only with a cart,** stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
- **Lightning.** For added protection for this product during a lightning storm, or when it is left unattended and unused for long periods of time, unplug it from the AC wall outlet and the audio connections. This will prevent damage to the product due to lightning and power line surges
- **Installation.** Configuration and installation should only be carried out by a competent installation engineer
- **Cabling.** Using high quality wires, well protected. Make sure the cable integrity.



This symbol alerts you to the presence of dangerous voltage inside the closure – voltage which may be sufficient to constitute a risk of shock. Do not perform any servicing other than that contained in the operating instructions. Refer all servicing to qualified personnel



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.



Do not change the voltage setting or replace the mains fuse without first turning the unit off and unplugging the mains cord



Make sure the AC main voltage corresponds to that indicated in the technical specifications.
THIS APPARATUS MUST BE EARTHED !



To avoid risk of fire use the correct value fuse, as indicated on the label stuck on the right side of the unit.



This apparatus uses a single pole mains switch and does therefore not separate the unit completely from the mains power. To completely separate from mains power (f.i. in the event of danger) unplug mains power cord. As the MAINS plug is the disconnect device, the disconnect device shall remain readily operable.

5 CONSIGNES DE SÉCURITÉ IMPORTANTES

- Lire ces consignes
- Conserver ces consignes
- Observer tous les avertissements
- Suivre toutes les consignes
- Ne pas utiliser cet appareil à proximité de l'eau
- Ne pas obstruer les ouvertures de ventilation. Installer en respectant les consignes du fabricant
- Ne pas installer à proximité d'une source de chaleur telle qu'un radiateur, une bouche de chaleur, un poêle ou d'autres appareils (dont les amplificateurs) produisant de la chaleur.
- Ne pas annuler la sécurité de la fiche de terre, la troisième branche est destinée à la sécurité. Si la fiche fournie ne s'adapte pas à la prise électrique, demander à un électricien de remplacer la prise hors normes.
- Protéger le cordon d'alimentation afin que personne ne marche dessus et que rien ne le pince, en particulier aux fiches, aux prises de courant et au point de sortie de l'appareil
- Utiliser uniquement les accessoires spécifiés par le fabricant
- Utiliser uniquement avec un chariot, un support ou une table spécifié par le fabricant ou vendu avec l'appareil. Si un chariot est utilisé, déplacer l'ensemble chariot-appareil avec précaution afin de ne pas le renverser, ce qui pourrait entraîner des blessures
- Débrancher l'appareil pendant les orages ou quand il ne sera pas utilisé pendant longtemps.
- Confier toute réparation à du personnel qualifié. Des réparations sont nécessaires si l'appareil est endommagé d'une façon quelconque, par exemple: cordon ou prise d'alimentation endommagé, liquide renversé ou objet tombé à l'intérieur de l'appareil, exposition de l'appareil à la pluie ou à l'humidité, appareil qui ne marche pas normalement ou que l'on a fait tomber.
- NE PAS exposer cet appareil aux égouttements et aux éclaboussements. Ne pas poser des objets contenant de l'eau, comme des vases, sur l'appareil



Ce symbole indique la présence d'une tension dangereuse dans l'appareil constituant un risque de choc électrique.



Ce symbole indique que la documentation fournie avec l'appareil contient des instructions d'utilisation et d'entretien importantes.



Avant de modifier le commutateur de changement de tension ou remplacer le fusible il faut débrancher l'appareil de la prise électrique. Pendant son usage, l'appareil doit être branché à la prise de terre



Utiliser le fusible principal AC avec la valeur qui est indiquée sur l'étiquette collée sur le coffret.



Assurez-vous que la tension principale AC correspond à celle indiquée dans les spécifications techniques.



L'interrupteur d'alimentation interrompt un pôle du réseau d'alimentation excepté le conducteur de terre de protection. En cas de danger, débrancher le cordon d'alimentation. Parce que la prise du réseau de alimentation est utilisée comme dispositif de déconnexion, ce dispositif doit demeurer aisément accessible

6 ISTRUZIONI IMPORTANTI PER LA SICUREZZA

- Leggere le presenti istruzioni
- Conservare queste istruzioni
- Osservare tutte le avvertenze
- Seguire scrupolosamente tutte le istruzioni
- Non usare questo apparecchio in prossimità di acqua
- Non ostruire alcuna apertura per il raffreddamento. Installare l'apparecchio seguendo le istruzioni
- Non installare l'apparecchio accanto a fonti di calore quali radiatori, aperture per l'afflusso di aria calda, forni o altri apparecchi (amplificatori inclusi) che generino calore
- Non rimuovere il terminale di connessione a terra sul cordone di alimentazione: esso ha lo scopo di tutelare l'incolumità dell'utilizzatore. Se la spina in dotazione non si adatta alla presa di corrente, rivolgersi ad un elettricista per far eseguire le modifiche necessarie.
- Evitare di calpestare il cavo di alimentazione o di comprimerlo, specialmente in corrispondenza della spina e del punto di inserzione sull'apparato.
- Utilizzare solo dispositivi di collegamento e gli accessori specificati dal produttore.
- Utilizzare l'apparecchio solo con un carrello, un sostegno, una staffa o un tavolo di tipo specificato dal produttore o venduto insieme all'apparecchio. Se si utilizza un carrello, fare attenzione negli spostamenti per evitare infortuni causati da ribaltamenti del carrello stesso.
- Scollegare l'apparecchio dalla presa di corrente durante i temporali o quando inutilizzato a lungo
- Per qualsiasi intervento, rivolgersi a personale di assistenza qualificato. È necessario intervenire sull'apparecchio ogniqualvolta si verificano danneggiamenti di qualsiasi natura. Ad esempio, la spina o il cavo di alimentazione sono danneggiati, è entrato liquido nell'apparecchio o sono caduti oggetti su di esso, l'apparecchio è stato esposto alla pioggia o all'umidità, non funziona normalmente o è caduto.
- Non esporre a sgocciolamenti o spruzzi. Non appoggiare sull'apparecchio oggetti pieni di liquidi, ad esempio vasi da fiori.



Questo simbolo indica la presenza di alta tensione all'interno dell'apparecchio, che comporta rischi di scossa elettrica.



Questo simbolo indica la presenza di istruzioni importanti per l'uso e la manutenzione nella documentazione in dotazione all'apparecchio.



Non sostituire il fusibile o cambiare la tensione di alimentazione senza aver prima scollegato il cordone di alimentazione. L'APPARATO DEVE ESSERE CONNESSO A TERRA.



Sostituire il fusibile generale con uno di identico valore, come indicato sulla etichetta applicata sul mobile dell'apparato



Assicurarsi che la tensione di rete corrisponda a quella per la quale è configurato l'apparecchio



Questo apparato utilizza un interruttore di alimentazione di tipo unipolare e l'isolamento dalla rete elettrica non è pertanto completo. Per ottenere un isolamento totale (ad esempio in caso di pericolo), scollegare il cordone di alimentazione. Inoltre, poichè la spina di alimentazione è utilizzata come dispositivo di sezionamento, essa deve restare facilmente raggiungibile

7 WICHTIGE SICHERHEITSHINWEISE

- Diese Hinweise **LESEN**
- Diese Hinweise **AUFHEBEN**
- Alle Warnhinweise **BEACHTEN**
- Alle Anweisungen **BEFOLGEN**
- Dieses Gerät **NICHT** in der Nähe von Wasser verwenden
- **KEINE** Lüftungsöffnungen verdecken. Gemäß den Anweisungen des Herstellers einbauen
- **Nicht in der Nähe von Wärmequellen**, wie Heizkörpern, Raumheizungen, Herden oder anderen Geräten (einschließlich Verstärkern) installieren, die Wärme erzeugen
- **Die Schutzfunktion des Schukosteckers NICHT umgehen**. Bei Steckern für die USA gibt es polarisierte Stecker, bei denen ein Leiter breiter als der andere ist; US-Stecker mit Erdung verfügen über einen dritten Schutzleiter. Bei diesen Steckerausführungen dient der breitere Leiter bzw. der Schutzleiter Ihrer Sicherheit. Wenn der mitgelieferte Stecker nicht in die Steckdose passt, einen Elektriker mit dem Austauschen der veralteten Steckdose beauftragen
- **VERHINDERN, dass das Netzkabel gequetscht oder darauf getreten wird**, insbesondere im Bereich der Stecker, Netzsteckdosen und an der Austrittsstelle vom Gerät
- **NUR das vom Hersteller angegebene Zubehör** und entsprechende Zusatzgeräte verwenden.
- **NUR in Verbindung** mit einem vom Hersteller angegebenen oder mit dem Gerät verkauften Transportwagen, Stand, Stativ, Träger oder Tisch verwenden. Wenn ein Transportwagen verwendet wird, beim Verschieben der Transportwagen-Geräte-Einheit vorsichtig vorgehen, um Verletzungen durch Umkippen
- **Das Netzkabel dieses Geräts** während Gewittern oder bei längeren Stillstandszeiten aus der Steckdose **ABZIEHEN**.
- **Alle Reparatur- und Wartungsarbeiten** von qualifiziertem Kundendienstpersonal **DURCHFÜHREN LASSEN**. Kundendienst ist erforderlich, wenn das Gerät auf irgendeine Weise beschädigt wurde, z.B. wenn das Netzkabel oder der Netzstecker beschädigt wurden, wenn Flüssigkeiten in das Gerät verschüttet wurden oder Fremdkörper hineinfließen, wenn das Gerät Regen oder Feuchtigkeit ausgesetzt war, nicht normal funktioniert oder fallen gelassen wurde.
- **Dieses Gerät vor Tropf- und Spritzwasser SCHÜTZEN**. **KEINE** mit Wasser gefüllten Gegenstände wie zum Beispiel Vasen auf das Gerät **STELLEN**.



Dieses Symbol zeigt an, dass gefährliche Spannungswerte, die ein Stromschlagrisiko darstellen, innerhalb dieses Geräts auftreten.



Dieses Symbol zeigt an, dass das diesem Gerät beiliegende Handbuch wichtige Betriebs- und Wartungsanweisungen enthält.



Vor Änderung der Netzspannung oder Sicherungswechsel Netzkabel trennen.
Das Gerät muss für den Betrieb geerdet werden.



Hauptsicherung nur mit einer gleichwertigen austauschen
(s. entsprechende Etikette).



Vor Einschalten Netzspannungseinstellung am Gerät überprüfen bzw. anpassen.



Inpoliger Netzschalter. In Notfälle oder für Wartungsarbeiten Netzkabel trennen. Der Netzstecker fungiert auch als Trennelement muss deshalb zugänglich bleiben

8 INSTRUCCIONES IMPORTANTES DE SEGURIDAD

- **LEA** estas instrucciones
- **CONSERVE** estas instrucciones
- **PRESTE ATENCION** a todas las advertencias.
- **SIGA** todas las instrucciones
- **NO** utilice este aparato cerca del agua
- **NO** obstruya ninguna de las aberturas de ventilación. Instálese según lo indicado en las instrucciones del fabricante
- **No instale el aparato cerca de fuentes de calor** tales como radiadores, registros de calefacción, estufas u otros aparatos (incluyendo amplificadores) que produzcan calor
- **NO anule la función de seguridad del enchufe polarizado** o con clavija de puesta a tierra. Un enchufe polarizado tiene dos patas, una más ancha que la otra. Un enchufe con puesta a tierra tiene dos patas y una tercera clavija con puesta a tierra. La pata más ancha o la tercera clavija se proporciona para su seguridad. Si el toma corriente no es del tipo apropiado para el enchufe, consulte a un electricista para que sustituya el toma corriente de estilo anticuado
- **PROTEJA** el cable eléctrico para evitar que personas lo pisen o estrujen, particularmente en sus enchufes, en los toma corrientes y en el punto en el cual sale del aparato
- **UTILICE únicamente los accesorios especificados por el fabricante**
- **UTILICESE únicamente** con un carro, pedestal, escuadra o mesa del tipo especificado por el fabricante o vendido con el aparato. Si se usa un carro, el mismo debe moverse con sumo cuidado para evitar que se vuelque con el aparato
- **DESENCHUFE** el aparato durante las tormentas eléctricas, o si no va a ser utilizado por un lapso prolongado.
- **TODA reparación** debe ser llevada a cabo por técnicos calificados. El aparato requiere reparación si ha sufrido cualquier tipo de daño, incluyendo los daños al cordón o enchufe eléctrico, si se derrama líquido sobre el aparato o si caen objetos en su interior, si ha sido expuesto a la lluvia o la humedad, si no funciona de modo normal, o si se ha caído.
- **NO exponga** este aparato a chorros o salpicaduras de líquidos. NO coloque objetos llenos con líquido, tales como floreros, sobre el aparato .



Este símbolo indica que la unidad contiene niveles de voltaje peligrosos que representan un riesgo de choques eléctricos.



Este símbolo indica que la literatura que acompaña a esta unidad contiene instrucciones importantes de funcionamiento y mantenimiento.



Antes de cambiar la alimentación de voltaje o de cambiar el fusible, desconecte el cable de alimentación. Para reducir el riesgo de descargas eléctricas, esta unidad debe ser conectada a tierra.



Remplaze el fusible con lo mismo, que corresponde a lo indicado en el panel del equipo.



Antes de encender, controlar que la línea de alimentación de voltaje corresponda a la indicada



El interruptor de alimentación es unipolar. En el caso de peligro, desconecte el cable de alimentación. Porque la clavija de conexión a red sirve por la desconexión de la unidad, la clavija debe ser ubicada en proximidad de la unidad

9 UNPACKING AND INSPECTION

Your equipment was packed carefully at the factory in a container designed to protect the unit during shipment. Nevertheless, we recommend making a careful inspection of the shipping carton and the contents for any signs of physical damage.

Damage & Claims

If damage is evident, do not discard the container or packing material. Contact your carrier immediately to file a claim for damages. Customarily, the carrier requires you, the consignee, to make all damage claims. It will be helpful to retain the shipping documents and the waybill number.

Save all packing materials! If You should ever have to ship the unit (e.g. for servicing), it is best to ship it in the original carton with its packing materials because both the carton and packing material have been carefully designed to protect the unit.

Under normal conditions no user maintenance or calibration are required. Internal links and preset controls may be set to configure the unit during installation. **Any service work required should be carried out by qualified service personnel only.**

We are able to offer further product support through our worldwide network of approved dealers and service agents.



To help us provide the most efficient service please would you keep a record of the unit serial number, and date and place of purchase to be quoted in any communication regarding this product.

The actual equipment Serial Number is indicated on the silver label stuck on the rear panel of the equipment closure.



Tools And Equipment Needed

Only standard technician's tools are required to install this equipment.

10 FIRST INSTALLATION RECOMMENDATIONS

10.1 POWER SUPPLY CABLE

A power supply cable of approx. 2 mt length is supplied with the device, which has a moulded IEC plug attached – this is a legal requirement.

The type of plug for the power supply depends on the country in which it is delivered.

If for any reason, you need to use this appliance with a different plug, you should use the following wiring guidelines in replacing the existing plug with the new one:

Earth	Green, or green and yellow
Neutral (N)	Blue
Live (L)	Brown

Supply cables should be laid in such a manner that one does not step or walk on them. They should not be squashed by any objects.

THIS EQUIPMENT MUST BE EARTHED.

The chassis is always connected to mains earth to ensure your safety: check your mains wiring and earthing before switching on.

10.1 PROTECTION AGAINST LIGHTNING - NUMERAZIONE



Should the device be put out of action due to being struck by lightning or excess voltage, disconnect it from the power supply without delay. Do not reconnect until the device has been checked. If in doubt contact the technical support service.

Make sure there is suitable lightning protection to protect the device.

Alternatively you should disconnect all connectors from the device during a storm or when the device is going to be unsupervised or not used for a longer period of time.

These measures will protect against damage by lightning or excess voltage.

10.2 VENTILATION

The equipment will operate as a free-standing unit without requiring any special cooling arrangement.

However, slots and openings in the product are provided for ventilation. They ensure reliable operation of the product, keeping it from overheating. These openings must not be blocked nor covered during operation.

YOU MUST LEAVE AT A MINIMUM ONE RACK UNIT OF EMPTY SPACE ABOVE THE EQUIPMENT TO ENHANCE VENTILATION AND TO GET A LONGER EQUIPMENT LIFE.

11 WOLF 2MS INSTALLATION NOTE AND FIRST STEP

Best setup location

The Wolf 2MS should be installed in a 19" rack. Avoid direct sunlight, close proximity to radiators and air conditioning, dust, water, and chemicals. Choose a rack location that permits a clear view to the indicators on the device and ensure a sufficient heat dissipation of the device.

Power supply

The device is designed for operation with 100 to 240 V AC, 50 Hz to 60 Hz. Check the corresponding device labelling for compatibility to the domestic line voltage and frequency before connecting the IEC power connector to the mains supply!



WARNING

Disconnect mains power plug before you open the housing. Repair of the equipment must only be carried out by authorized and qualified personnel.

1	<i>Power Supply</i>	Please make sure that the device and the contained fuse(s) (please see p. 20) are compatible to the domestic line voltage and frequency. If the device is compatible, connect the power supply cord fully to the IEC power connector at the rear side of the device and a mains power outlet. The "LCD Screed" will then turn on.
2	<i>Network configuration</i>	For delivery, the device is configured with default settings for the first connection via the IP interface. Wolf 2MS have a display, so you can configure the IP settings right now: See step " LAN-1 Page Functionality (How to set the TCP/IP ETH-1) "
3	<i>Connect to network</i>	Connect a network patch cable to the "10/100-Base-T" connector on the rear side of the device and your existing IP network.
4	<i>Web interface</i>	The device can be fully operated with an internet browser via the integrated web interface. Use a computer that is connected to the same IP network that the Wolf 2MS device is connected to. Start an internet browser, Firefox/Mozilla >V2.0 Google Chrome both with Java Script activated and enter the configured IP address in the address bar of the browser. If the IP address has not been changed in step 2, please enter the default address in the address bar of the browser: 192.168.XXX.XXX.
5	<i>Connect FM antenna cable to each Tuner-1 and Tuner-2</i>	Now connect the antenna cable to Wolf 2MS. There are two separate BNC inputs, please provide a correct level of RF signal to the equipment. See in the technical specs the RF level range.
6	<i>Ready!</i>	These first steps are only intended for a quick first start and do not cover all device functions. Please read carefully the entire manual to be able to use all functions of the device.
7	<i>Important note on the Username and password</i>	The equipment comes out from Axel Technology with a standard username: admin and password: admin Each time a NEW user, with administration rights is created, the user <i>admin</i> disappear and it is replaced by the new one just created. If all users are deleted, the standard admin – admin comes out again

11.1 IMPORTANT NOTE ON USER NAME AND PASSWORD

The equipment comes out from Axel Technology with a standard username:

Username: **admin**

password: **admin**

(case sensitive)

Each time a NEW user, with administration rights is created, the user *admin* disappear and it is replaced by the new one just created. If all users are deleted, the standard admin – admin comes out again, in order to create and enter the Wolf 2MS


11.2 HOW TO SHUT DOWN WOLF 2MS

Wolf 2MS is an Operative System-based equipment (as a PC) so a particular procedure to shut Wolf 2MS down is:

1. Holding for 3 seconds the encoder button. Press OK




2. Will be displayed a window to confirm the system shut down procedure.

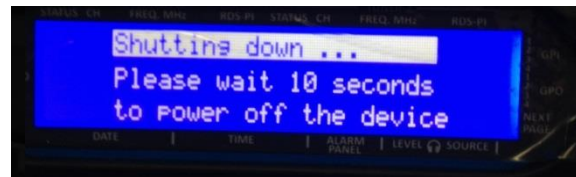


3. After this procedure a blank screen will be displayed. Now it is possible to shut down the device

12 WOLF 2MS GENERAL DESCRIPTION

12.1 WOLF 2MS BLOCK DIAGRAM

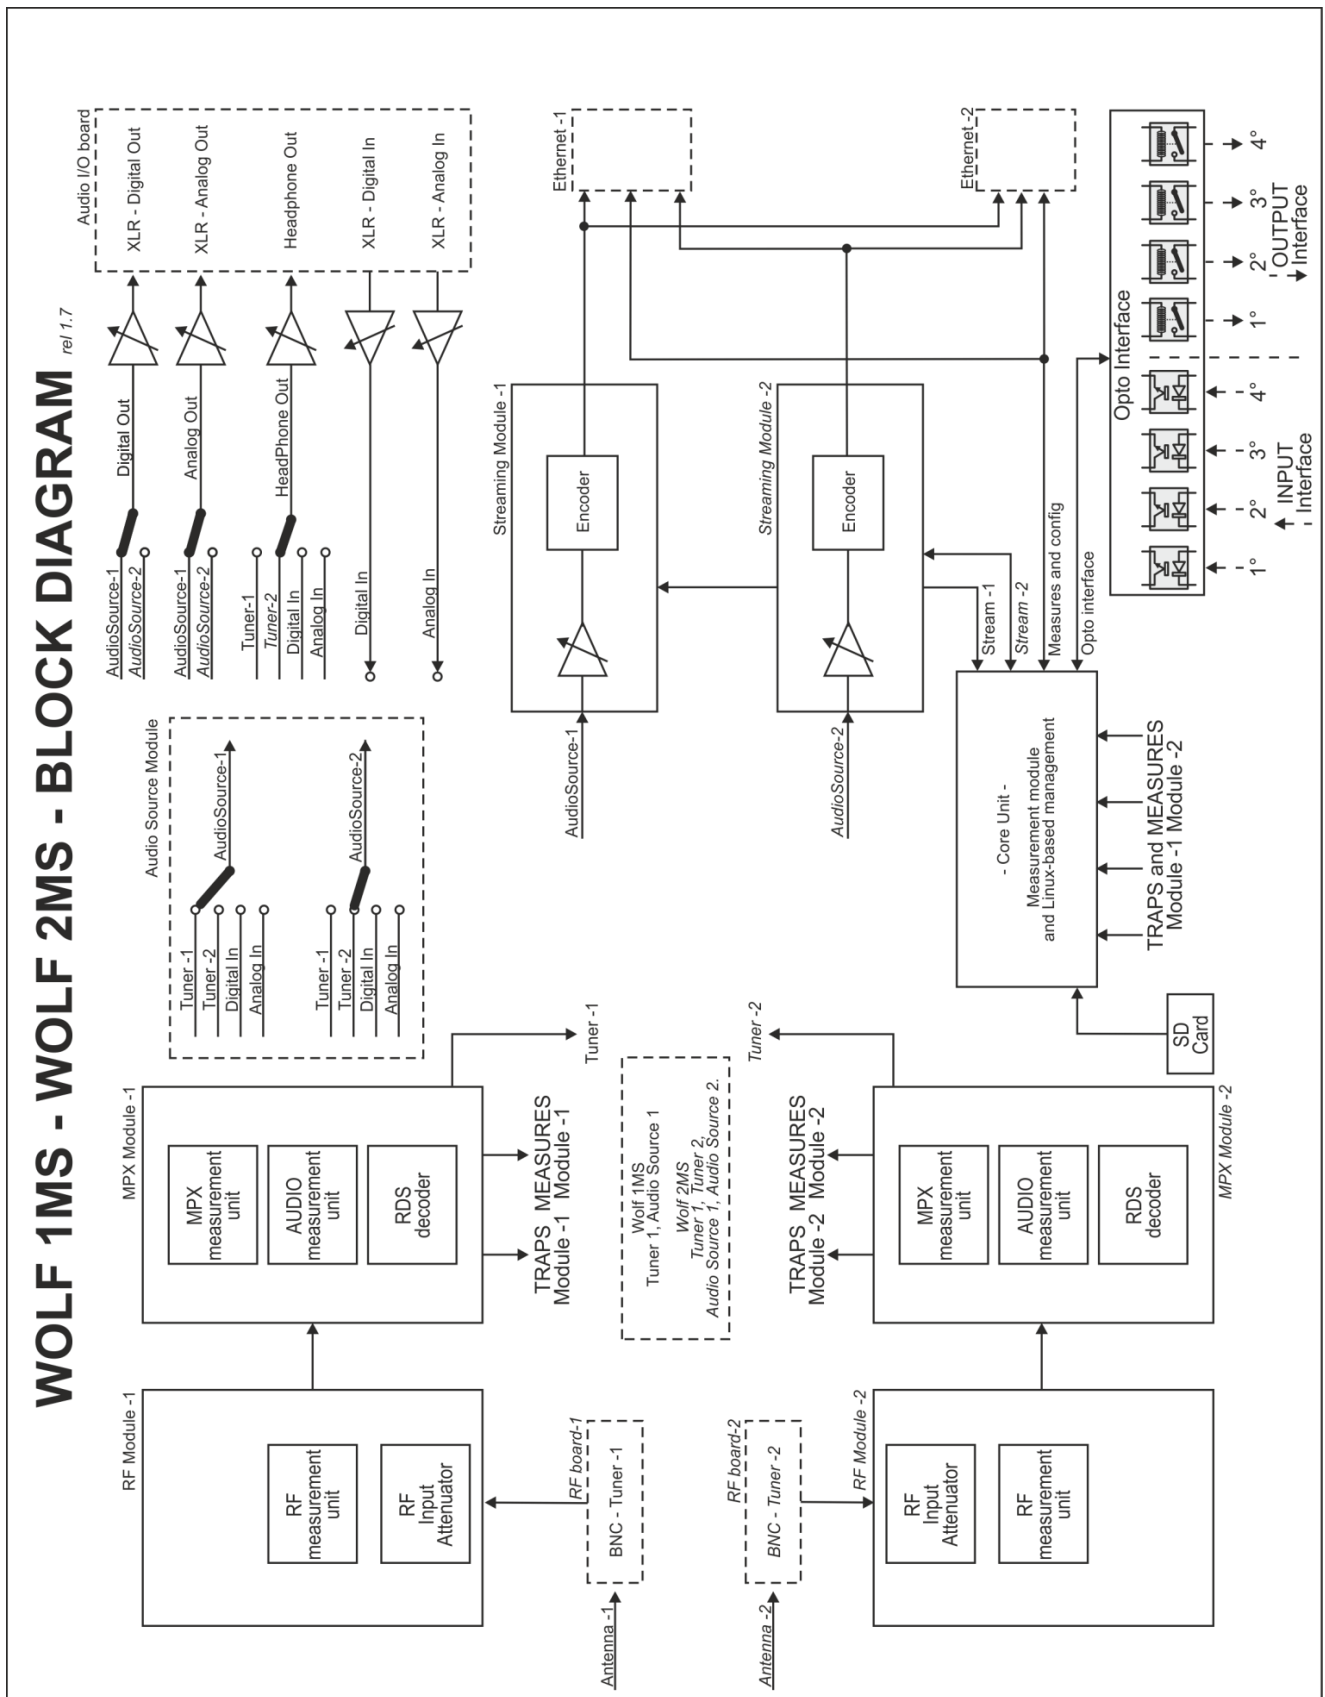


12.2 WOLF 2MS FRONT PANEL

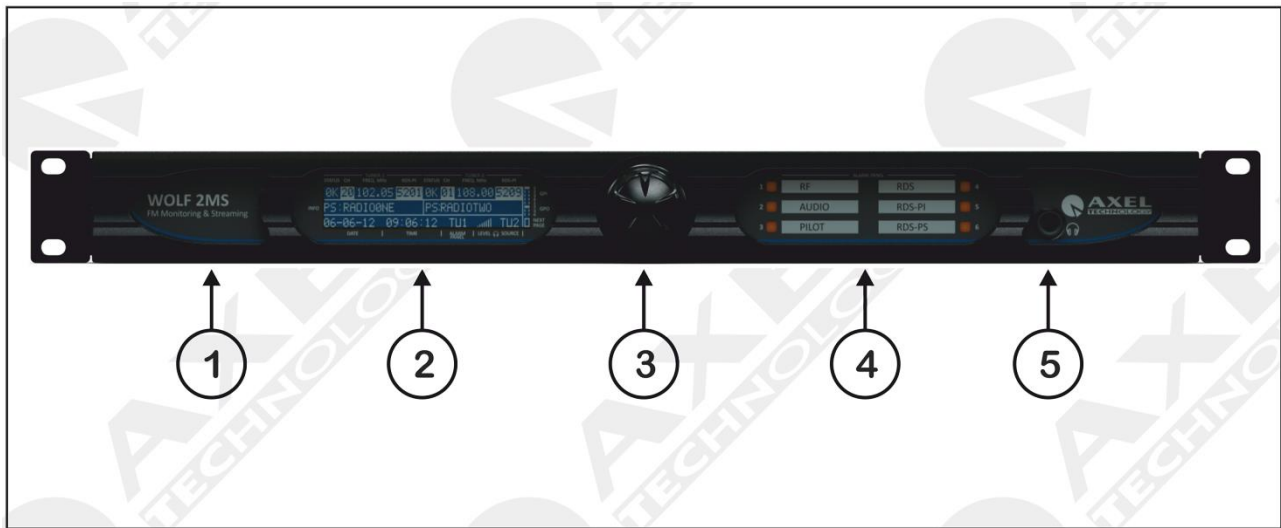

N°	CONTROL NAME	FUNCTION
1	EQUIPMENT NAME	Label designed for model name and optional features.
2	LCD DISPLAY	LCD display on two lines showing the status and operation of Wolf 2MS. All the technical parameters for each menu are displayed.
3	JOG-SHUTTLE	Jog Shuttle in order to be able to access the various navigation menus and to make changes. Pressing the Jog Shuttle will confirm the selection. Accessing the <i>Menu</i> , it is possible to fully configure the machine for the operation mode.
4	LED ALARM PANEL	This six-led panel shows some alarms during band scanning or frequency check.
5	HEADPHONE OUT	On this connector it's available the decoded audio out from Tuner -1 or from Tuner -2. Volume control selectable via front panel.

12.3 WOLF 2MS REAR PANEL

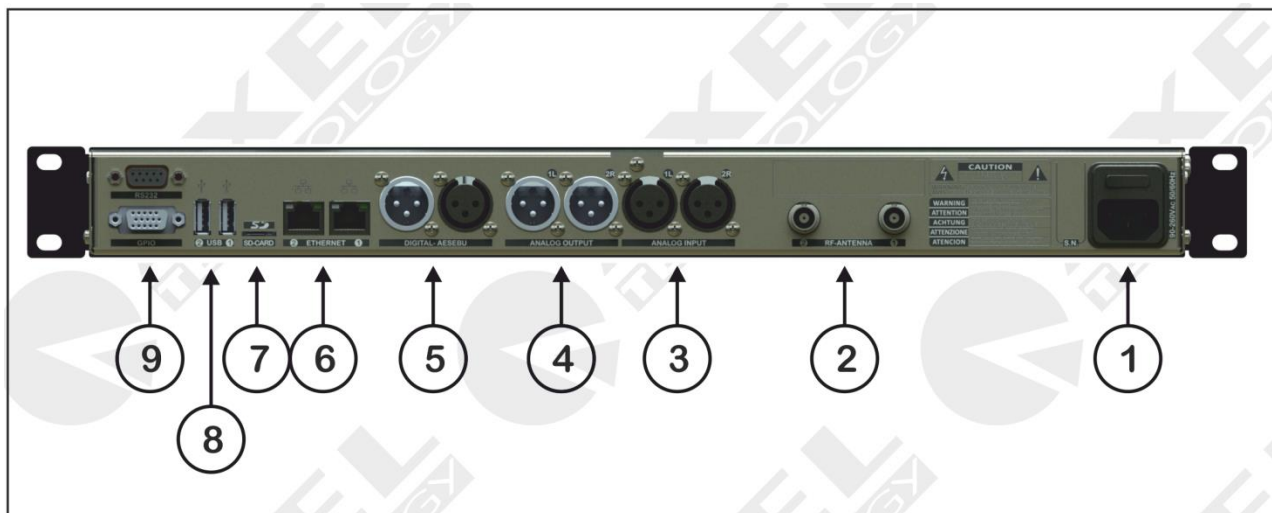

N°	CONTROL NAME	FUNCTION
1	POWER SUPPLY UNIT	Power inlet with integrated switch on/off. The switch-power socket unit is protected via fuse placed directly over the switching power supply. The fuse is a retarded type <u>2000 mA for 230V mains voltage</u> . Please refer to "Fuse Replacement" in order to replace the fuse.
2	RF ANTENNA IN 1 - 2	RF antenna input -1 for Tuner -1 and RF antenna input -2 for Tuner -2. The connection provided is over BNC unbalanced 50Ω
3	ANALOG INPUT	<i>External Input</i> source in analog Left + Right. The user can connect to this input, an audio source to be monitored and under control. This audio input is continuously monitored: silence detection (Threshold/time and level), left and right presence, peak left, peak right.
4	ANALOG OUTPUT	Wolf 2MS analog audio output, electronically balanced, on XLR balanced stereo connector. This audio output presents the capability to listen the Tuner -1 or the Tuner -2 output software selectable.
5	DIGITAL AES/EBU	<i>External Input</i> source in/out digital in AES/EBU format. The user can connect to this input, an audio source. This audio input is continuously monitored: silence detection (Threshold/time and level), left and right presence, peak left, peak right. The digital output presents the capability to listen the Tuner -1 or the Tuner -2 output software selectable. The audio output is over XLR electronically balanced connection.
6	ETHERNET	Double Ethernet port over RJ45 connectors. The port n°1 is used to connect the device to a LAN network and upload or download configurations and settings. The port n°2 is used as an audio streaming port.

7	SD CARD HOST	Rear panel SD Card host
8	USB 1 – USB 2	Wolf 2MS is also featured with a double USB port type A. The USB port is generally used to connect other devices.
9	GPIO INTERFACE and SERIAL INTERFACE	Wolf 2MS provide a GPIO interface composed by 4x photo coupler as GPIn, and 4x relays dry contact output. The connector is a 15 pole HD female on SubD connector. Wolf 2MS provides 1 serial port for RDS-UECP bridging and re broadcasting data. Wolf 2MS use a SubD 9p male connector with serial Rs232 protocol. For information on the pinout of the GPIO Interface port refer to the Appendix at the end of this manual. See the specific section for the operation of each GPI and GPO in the next few pages of this manual.

12.4 WOLF 2MS DISPLAY AND LED PANEL




This section explain the front panel main display features. Divided by color are reported below:

- GREEN Zone : The display shows the Tuner 1's Status.
- ORANGE Zone : The display shows the Audio Streaming Module-1's Status.
- PINK Zone : The display shows the Tuner 2's Status.
- BLACK Zone : The display shows the Audio Streaming Module-2's Status.
- GREY Zone : The display shows the GPIO's Status.
- YELLOW Zone : The display shows the internal DATE and TIME.
- RED Zone : The display shows the Alarm Panel Settings (LED's Panel).
- VIOLET Zone : The display shows the headphone level and source.
- BROWN Zone : Next page button

12.4.1 Tuner Module-1 Zone Functionality

In order analyze each single frequency an antenna or a Transmitter RF test must be connected to the Tuner-1 BNC input connector. The single frequency or the multiple band scan frequencies must be set via web page.

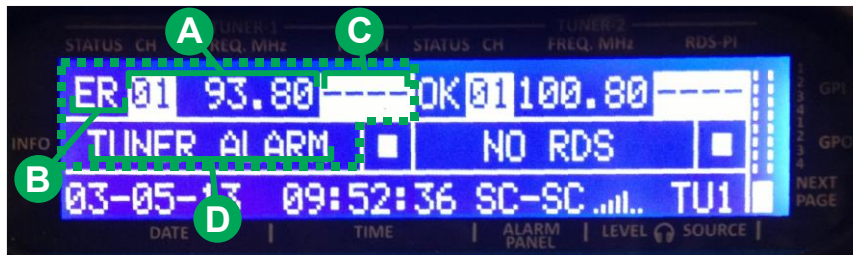

A) Shows the number of the memory and the frequency connected

- In **STATIC** mode the memory and his frequency are fixed.
- In **SCAN** mode the memory does a loop, between all the frequencies stored via web page. Then the frequency set (in MHz) appear for the scanning time set.

B) This label shows the status of the memory:

- **OK**: there are no errors (RF, DEVIATION, RDS)
- **ER**: there are one more errors

How to check this functionality in case of **ER**:

By using the web page move the threshold of RF-H1 under the measured value.

- Verify that the status of B zone change from **OK** to **ER**.

C) This zone shows the **INFO** and change the functionality :

- 1) In case that no alarms are present:
 - The D zone shows the PS-RDS
 - 2) In case that alarms are present:
 - The D zone shows the list of alarms
- a. Test n°1
 - Using an external RDS Encoder change the PI or using an antenna tune some radio station.
 - Verify that the PS change and correspond to the PS set.
 - In case that there isn't RDS signal the PS show NO RDS as the photo.

- b. Test n°2
 - Using web page move the RF-H1 threshold under the measured value.
 - Verify that the status of D zone shows TUNER ERROR as the photo.
 - Using the Jog Shuttle move the cursor on the display under the memory number
 - Push the Jog Shuttle (To select the function)
 - Now the display (Tuner-1 zone) show the memory and the frequency selected but in the background the scanning still working.
 - Select the right memory moving the jog shuttle

The D zone shows the list of the all alarms that are present.

- After 30 seconds the display start again to shows the loop of all memories that are scanned.

D) This zone shows the **PS-RDS** if PS is present and valid, or NO RDS if it is not valid.


- Tuner in Static Mode: turning the encoder positioning the index of the channel and pressing it to select the channel, the list of possible errors is printed in zone D) as a carousel.

- Tuner Scanning Mode: After selecting the channel as above, turning the encoder you can 'browse through all channels, checking the status (which is printed in zone D). If there are errors, are printed in the same area of the display as a carousel.

- 3) In case that no alarms are present:
 - The D zone shows the PS-RDS
- 4) In case that alarms are present:
 - The D zone shows the list of alarms

- c. Test n°1
 - Using an external RDS Encoder change the PI or using an antenna tune some radio station.
 - Verify that the PS change and correspond to the PS set.
 - In case that there isn't RDS signal the PS show NO RDS as the photo.

12.4.2 Audio Streaming Module-1 Zone Functionality

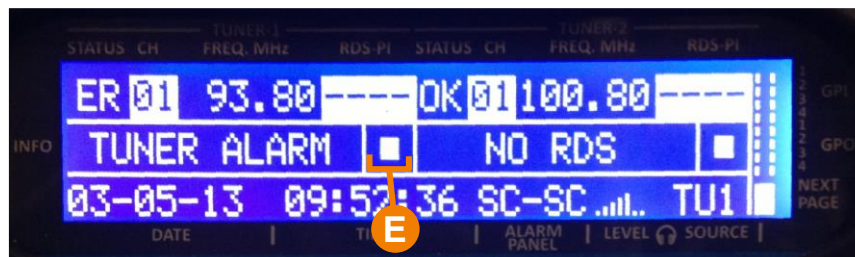


D) This label show the status of Audio Streaming Module-1:

- **T1, T2, AN, DG:** Audio source in streaming

12.4.4 Tuner Module-2 Zone Functionality

Repeats all tests using the Tuner-2 instead of Tuner-1 from the point A to D expressed below

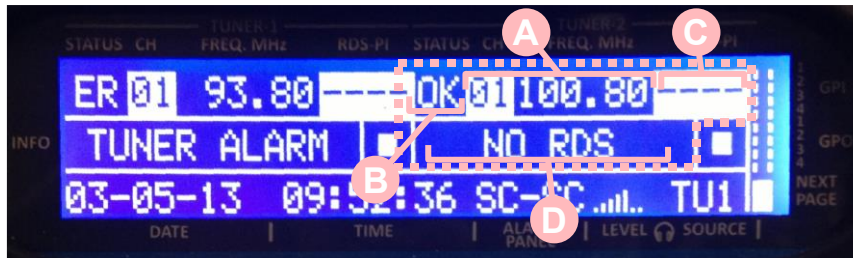

12.4.5 GPIO Zone Functionality



A) Shows the status of the 4 GP-Inputs

- No Polarization: the small box in the right side of the display is empty
- With Polarization: the small box in the right side of the display is full


Verify that functionality using the GPIO port and an external source to polarized the opto-couplers, check the electric diagram.

B) Shows the status of the 4 GP-Outputs (Relay Contacts)

- Opened contact: the small box in the right side of the display is empty
- Closed contact: the small box in the right side of the display is full

Verify that functionality using the GPIO port and an external devices to enable using the 4 relay contacts, check the electric diagram.

12.4.6 Time and Date Zone Functionality

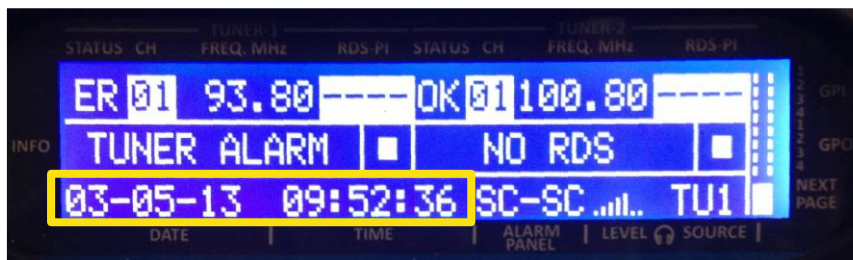


Shows the status internal clock. It is not possible to modify these parameters through the display interface.

12.4.7 Alarms Panel Zone Functionality

This Label shows the status of the Alarms panel

This Label shows the status of the Alarms panel

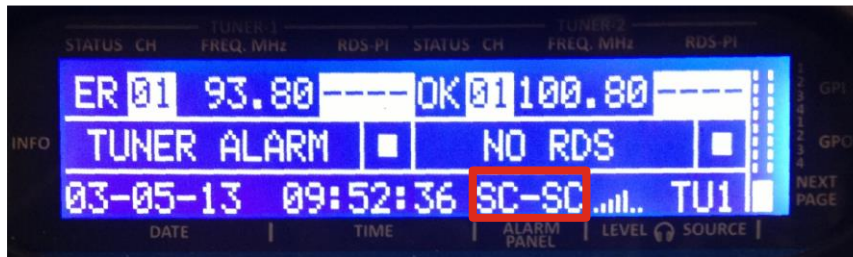

Right LCD Panel



Left LED Panel (Alarm Panel)

The Alarms Panel (*Left LED Panel*) shows:

- on the left side the alarms of Tuner module-1
- on the right side the alarms of Tuner module-2

In the Right LCD Panel it is possible to find the Alarm Panel label (red square in the picture above) The status of this label should be:

AC	All Channels - Mode In AC Mode the LEDs indicate the OR (sum) of the all same alarm type when the LEDs are on theirs status is blinking.
SC	Single Channel - Mode In SC Mode the LEDs indicate only the alarm of the memory and frequency selected, when the LEDs are on theirs status is fixed.

This label shows the status of the two areas of alarms panel :

- Label **AC-AC** (Tuner-1 and Tuner 2 are in All Channels - Mode)
- Label **SC-SC** (Tuner-1 and Tuner 2 are in Single Channel - Mode)
- Label **AC-SC** (Tuner-1 is in All Channels - Mode and Tuner 2 is in Single Channel - Mode)
- Label **SC-AC** (Tuner-1 is in Single Channel - Mode and Tuner 2 is in All Channels - Mode)

Check the display functionality and **RF ALARM** Status:

- Using web page set SCAN mode for the 1st and 2nd tuner.
- Verify the display status : **AC-AC**
- Using web server move the RF-H1 threshold of the first memory under the measured value for each tuner.
- Verify that the display shows TUNER ERROR, in memory 01 for each tuner.
- The first led **RF ALARM** is blinking for each tuner.
- Using the the Jog Shuttle move the cursor on the display under the tuner-1 memory number.
- Push the Jog Shuttle (To select the function)
- Rotate the Jog Shuttle till to set Memory 01
- Verify the display status : **SC-AC**
- The first led RF ALARM of Tuner-1 is fixed
- The first led RF ALARM of Tuner-2 is blinking
- Using the the Jog Shuttle move the cursor on the display under the tuner-2 memory number.
- Push the Jog Shuttle (To select the function)
- Rotate the Jog Shuttle till to set Memory 01
- Verify the display status : **SC-SC**
- The first led RF ALARM of Tuner-1 is fixed
- The first led RF ALARM of Tuner-2 is fixed

Check the functionality of **MPX ALARM** Status:

- Using web server adjust the RF-H1 threshold for each tuner.
- Move the threshold of deviation at 50kHz
- Check the alarm panel

Check the functionality of **RDS ALARM Status**:

- At the moment this functionality it is not available.

12.4.8 Headphone Panel Zone Functionality



A) Shows the status of the headphones level

- Using the Jog Shuttle move the cursor on the display under the headphones level.
- Push the Jog Shuttle (To select the function)
- Rotate the Jog Shuttle till to find the right volume.
- Push the Jog Shuttle (To unselect the function)

B) Shows the headphones source and the sources selectable are:

TU1	Audio coming from Tuner-1
TU2	Audio coming from Tuner-2
ANL	Audio coming from Analog input
DGT	Audio coming from Digital input

- Push the Jog Shuttle (To select the function)
- Rotate the Jog Shuttle till to find the right source.
- Push the Jog Shuttle (To unselect the function)

12.4.9 LAN-1 Page Functionality (How to set the TCP/IP ETH-1)



Shows the status of the LAN-1 Setup

- Using the Jog Shuttle move the cursor on the display under the number that is necessary to change.
- Push the Jog Shuttle (To edit the number)
- Rotate the Jog Shuttle till to find the right number.
- Push the Jog Shuttle (To confirm the new number)
- Next page to confirm data changes

To access LAN-1 and access LAN-2: by pressing NEXT PAGE it is possible to change the page/settings.

12.4.10 LAN-2 Page Functionality (How to set the TCP/IP ETH-2)




Shows the status of the LAN-2 Setup

- Using the Jog Shuttle move the cursor on the display under the number that is necessary to change.
- Push the Jog Shuttle (To edit the number)
- Rotate the Jog Shuttle till to find the right number.
- Push the Jog Shuttle (To confirm the new number)
- After pressing the Jog Shuttle a reboot is required.



- Press OK to reboot the WOLF 2MS.

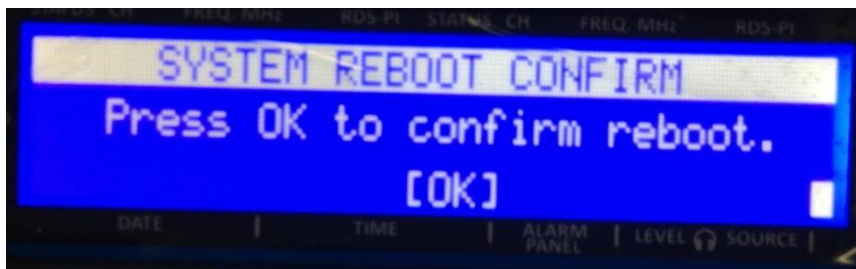

- During reboot the screen appears this way



12.4.11 IMPORTANT NOTE

Wolf 2MS is an Operative System-based equipment (as a PC) so, in order to change correctly the IP is necessary to wait some minutes, the screen will come back to the main page and then shut down and restart Wolf 2MS.

Remember that before each shut down, it is necessary to wait some minutes before to store correctly all the information on Wolf 2MS.

13 WOLF 2MS WEB PAGE

The Wolf 2MS can be managed via remote by using a simple web browser, ie Internet Explorer, Chrome, Mozilla etc etc. To reach a Wolf 2MS equipment, insert in the web browser navigation bar the Wolf 2MS IP. To get this information please see [LAN-1 and LAN-2 Page Functionality](#). By inserting the Wolf 2MS IP in the navigation bar, this is the Wolf 2MS home page:

13.1.1 The *Home* web page

Wolf2MS AXEL TECHNOLOGY

Monitoring Tuner-1 Data Tuner-2 Data **Settings** Setup Admin Tuner-1 Tuner-2 Audio Login

GENERAL INFORMATION

Name	IP-Eth1	Date	GPO	Release Firmware	Release WebApp
Axel Technology	192.168.050.203	22/05/14	0 1 2 3	1.0.3	1.0.2
Location	IP-Eth2	Time	GPI	Proxy Mode	User Name
Pluto	010.000.127.003	17:07:07	0 1 2 3	Disabled	Guest

TUNER-1 STEREO TUNED RDS

Ch. Mem.	Frequency	Channel Label	Mode
27	100.80 MHz	Local Axel 100.8	STATIC

RF L2 L1 ALARM H1 H2

Level	Carrier	M.Path	Adj-Chan	Alt-Chan
77.00 dBuV	4 ppm	10.37 %	-15.25 -38.12 dB	-23.75 dB

DEVIATION ALARM

MPX	Audio	Pilot	RDS
26.72 kHz	16.16 kHz	6.26 kHz	4.30 kHz

RDS DATA ALARM

PI	PS	BLER	CT	TP	TA
5123	FalconXT	053 %	OK	ON	OFF
M/S	DI	PTY	FILTERS	GROUPS	
MUSIC	STEREO STATIC	NO_PROG	OK	OK	
RT	AF	EON	IH	TMC	RT+
OK	OK	OK	---	---	---

TUNER-2 STEREO TUNED RDS

Ch. Mem.	Frequency	Channel Label	Mode
1	100.80 MHz	Chan1 Label	STATIC

RF L2 L1 ALARM H1 H2

Level	Carrier	M.Path	Adj-Chan	Alt-Chan
96.00 dBuV	4 ppm	0.00 %	-38.62 -39.37 dB	-79.00 dB

DEVIATION ALARM

MPX	Audio	Pilot	RDS
17.10 kHz	6.97 kHz	6.28 kHz	3.85 kHz

RDS DATA ALARM

PI	PS	BLER	CT	TP	TA
5123	FalconXT	000 %	OK	ON	OFF
M/S	DI	PTY	FILTERS	GROUPS	
MUSIC	STEREO STATIC	NO_PROG	OK	OK	
RT	AF	EON	IH	TMC	RT+
OK	OK	OK	---	---	---

AUDIO-1 ALARM

Source	Imbalance	Mono	Peak-L	Peak-R	RMS-L	RMS-R
TUNER1	1.2 dB	-26.8 dB	-18.8 dB	-20.1 dB	-25.7 dB	-28.0 dB

L -60 -50 -40 -30 -20 -10 +0 +10

R -60 -50 -40 -30 -20 -10 +0 +10

Streaming Information Countdown Ready OFF ▶

AUDIO-2 ALARM

Source	Imbalance	Mono	Peak-L	Peak-R	RMS-L	RMS-R
TUNER2	1.2 dB	-26.2 dB	-19.0 dB	-20.7 dB	-25.7 dB	-26.6 dB

L -60 -50 -40 -30 -20 -10 +0 +10

R -60 -50 -40 -30 -20 -10 +0 +10

Streaming Information Countdown Ready OFF ▶

The HOME page is mainly divided in two: in the Left side all the information retrieved from Tuner-1 and in the Right side all the information retrieved from Tuner-2.

Monitoring Tuner-1 Data Tuner-2 Data **Settings** Setup Admin Tuner-1 Tuner-2 Audio Logout

GENERAL INFORMATION

Name	IP-Eth1	Date	GPO	Release Firmware	Release WebApp
Axel Technology	192.168.050.203	22/05/14	0 1 2 3	1.0.3	1.0.2
Location	IP-Eth2	Time	GPI	Proxy Mode	User Name
Pluto	010.000.127.003	17:07:07	0 1 2 3	Disabled	Guest

TUNER-1 STEREO TUNED RDS

Ch. Mem.	Frequency	Channel Label	Mode
27	100.80 MHz	Local Axel 100.8	STATIC

RF L2 L1 ALARM H1 H2

Level	Carrier	M.Path	Adj-Chan	Alt-Chan
77.00 dBuV	4 ppm	10.37 %	-15.25 -38.12 dB	-23.75 dB

DEVIATION ALARM

MPX	Audio	Pilot	RDS
26.72 kHz	16.16 kHz	6.26 kHz	4.30 kHz

RDS DATA ALARM

PI	PS	BLER	CT	TP	TA
5123	FalconXT	053 %	OK	ON	OFF
M/S	DI	PTY	FILTERS	GROUPS	
MUSIC	STEREO STATIC	NO_PROG	OK	OK	
RT	AF	EON	IH	TMC	RT+
OK	OK	OK	---	---	---

TUNER-2 STEREO TUNED RDS

Ch. Mem.	Frequency	Channel Label	Mode
1	100.80 MHz	Chan1 Label	STATIC

RF L2 L1 ALARM H1 H2

Level	Carrier	M.Path	Adj-Chan	Alt-Chan
96.00 dBuV	4 ppm	0.00 %	-38.62 -39.37 dB	-79.00 dB

DEVIATION ALARM

MPX	Audio	Pilot	RDS
17.10 kHz	6.97 kHz	6.28 kHz	3.85 kHz

RDS DATA ALARM

PI	PS	BLER	CT	TP	TA
5123	FalconXT	000 %	OK	ON	OFF
M/S	DI	PTY	FILTERS	GROUPS	
MUSIC	STEREO STATIC	NO_PROG	OK	OK	
RT	AF	EON	IH	TMC	RT+
OK	OK	OK	---	---	---

AUDIO-1 ALARM

Source	Imbalance	Mono	Peak-L	Peak-R	RMS-L	RMS-R
TUNER1	1.2 dB	-26.8 dB	-18.8 dB	-20.1 dB	-25.7 dB	-28.0 dB

L -60 -50 -40 -30 -20 -10 +0 +10

R -60 -50 -40 -30 -20 -10 +0 +10

Streaming Information Countdown Ready OFF ▶

AUDIO-2 ALARM

Source	Imbalance	Mono	Peak-L	Peak-R	RMS-L	RMS-R
TUNER2	1.2 dB	-26.2 dB	-19.0 dB	-20.7 dB	-25.7 dB	-26.6 dB

L -60 -50 -40 -30 -20 -10 +0 +10

R -60 -50 -40 -30 -20 -10 +0 +10

Streaming Information Countdown Ready OFF ▶

The central front bar allows to browse inside the Wolf 2MS. This bar is mainly divided in two sections, the Monitoring and the Settings. Some Setup and Admin pages are under password protection.

In the lower side some general information are reported, as Wolf 2MS name, the Location where it is installed, the IP Ethernet Address 1 and IP Ethernet Address 2. The internal clock time and date information are reported together with GPIIn and GPOut, and the Release Firmware and web page.

If the Date and Time are with a red label below the box, this means that Wolf 2MS has not been able to synchronize via NTP the time and the clock. To set the NTP server in Wolf 2MS please refer to [Settings 2 – MAIN PAGE 2](#).

| WOLF 2MS WEB PAGE 45


All the information proposed in this page are only to be visualized.



The lower parts is related to Audio-1 and Audio-2 Stream, and the button Countdown allows the user to stop the stream after a kick out time, to reduce the stream data flow. The audio delivered to the audio streaming module can be selected by different sources, that should be Tuner-1 or Tuner-2 or Analog Input or Digital Input. Please refer to "Audio-1 Setup" and "Audio-2 Setup" to configure the input source for the audio streaming encoder.

13.1.3 LOGIN into WOLF2MS

Is it possible to LogIn into Wolf2MS and, as per right management, execute some changes. By pressing the Login button is it possible to set each own user name and password. Please refer to the [ADMIN](#) page in order to create or login with the standard credential



Starting from release 0.6.4 release a new function has been improved about users and login. Wolf 2MS comes out with a standard user called "admin" (and password "admin"). **Once a new user is created with Profile Administrator rights allowed, the "admin" user disappear from the list of users.** In the picture below it is possible to see that Mauro is the Profile Administrator.

But, once from Mauro's user the Profile Administrator is removed, Wolf 2MS creates automatically one more time the "admin" user with all rights allowed. This admin user is highlighted in yellow, as per picture below:

NOTE: It is not possible to change the password for admin user

13.1.4 Tuner-1 Data – Main Webpage

This page presents all the information coming from the Tuner-1. Assuming that the Tuner-1 has been placed in "Static" page displays information related to the frequency set in the Setup approximately decoded by Tuner-1.

The display of this page depends on the setup of the machine available in Settings -> Tuner-1 -> Main.

Wolf2MS

Monitoring

Tuner-1 Data

Tuner-2 Data

Settings

Setup

Admin

Tuner-1

Tuner-2

Audio

Logout

RDS Data Reset

MAIN

AF01-32

AF33-64

EON

STATS

TUNER-1

STEREO

TUNED

RDS

Ch. Mem.	Frequency	Channel Label	Mode
27	100.80 MHz	Local Axel 100.8	STATIC

RF

L2

L1

ALARM

H1

H2

Level	Carrier	M.Path	Adj-Chan	Alternative-Chan
76.00	dBuV	4 ppm	12.28 %	-10.42 -26.85 dBr
				-19.14 dBr

DEVIATION

ALARM

MPX	Audio - MPX	Pilot	RDS
65.73	kHz	55.13 kHz	6.28 kHz
			4.32 kHz

Imbalance	Mono	E.MpxPw	Peak-L	Peak-R	RMS-L	RMS-R
0.4	dB	-7.6 dBr	3.8 dB	-2.3 dBr	-2.7 dBr	-7.4 dBr
						-7.9 dBr

RDS DATA

ALARM

PI	PS	BLER	CT	TP	TA
5123	FalconXT	058 %	OK	ON	OFF

M/S	DI	PTY	FILTERS	GROUPS
MUSIC	STEREO STATIC	NO_PROG	OK	OK

RT	AF	EON	IH
OK	OK	OK	---

TMC	RT+	ODA-1	ODA-2
---	---	---	---

LA	EG	ILS	LSN
OFF	OFF	OFF	000

ODA-TMC

ALARM

AID	Group	Data
---	---	---

ODA-RT+

ALARM

AID	Group	Data
---	---	---

CT

ALARM

DATE	TIME	LocalTime Offset	Offset Time
22/05/14	15:22	+01.00	-3601 sec

SLC

SLC0-paging/ECC	SLC1-TMC	SLC2-paging	SLC3-Lang.Codes
---	---	---	---

SLC4	SLC5	SLC6-Broad.use	SLC7-EWS Ch.ID
---	---	---	---

RT

ALARM

DATA	A/B
-----	---
In & Out Of Love / OnAir Now by Born Jovi	1

PIN & PTYN

PIN-DATE	PIN-HOUR	PIN-MINUTE	PTYN
---	---	---	-----

RDS GROUPS

ALARM

GROUP-DATA

0A 2A 4A 14A

ODA-1

ALARM

AID	Group	Data
---	---	---

ODA-2

ALARM

AID	Group	Data
---	---	---

RF

L2

L1

ALARM

H1

H2

Level	Carrier	M.Path	Adj-Chan	Alternative-Chan
78.00	dBuV	7 ppm	1.66 %	-17.88 -20.00 dBr
				-13.66 dBr

DEVIATION

ALARM

MPX	Audio - MPX	Pilot	RDS
73.16	kHz	62.23 kHz	6.86 kHz
			4.07 kHz

Imbalance	Mono	E.MpxPw	Peak-L	Peak-R	RMS-L	RMS-R
0.9	dB	-7.6 dBr	2.2 dB	-1.0 dBr	-2.0 dBr	-6.8 dBr
						-8.5 dBr

Level:

the level of available RF Tuner

Carrier:

this value is a Carrier Offset. It's the difference between the Internal tuner and the Frequency that is under measure.

M.Path:

Value of Multi Path

Adj-Chan:

see explanation below

Alternative-Chan:

see explanation below

MPX:

level of the signal Multiplex

Audio-MPX:

Audio signal level inside the product Multiplex

Pilot:

Pilot Level stereo

RDS:

RDS data carrier level

Peak Left-Right:

Audio Peak Level

RMS Left-Right:

Audio RMS Level

It is possible to set the level of the alarms in Settings-> Tuner-1 -> RF

It is possible to set the level of the alarms in Settings-> Tuner-1 -> RF DEV / PII OT

Each single web page shows the status or the data coming from the Wolf 2MS for Tuner-1 and Tuner-2. In the main page it is possible to see the value, but it is not possible to operate because the information can only be viewed. The single page can shows MAIN - AF01-32 - AF33-64 – EON.

13.1.5 Deviation, Imbalance and MPX Power

The MPX power is estimated using the available separate components infos present in the MPX signal. The Pilot power, Rds power and Audio power is integrated inside a 1 minute window and referenced to a 19 kHz single tone power. This measurement estimates with a good precision the MPX Power only under typical nominal operative conditions.

DEVIATION						SLC			
MPX	Audio - MPX	Pilot	RDS			SLC0-paging/ECC	SLC1-TMC	SLC2-paging	SLC3-Lang.Codes
56.97	46.66	6.28	4.03			---	---	---	---
Imbalance	Mono	E.MpxPw	Peak-L	Peak-R	RMS-L	SLC4	SLC5	SLC6-Broad.use	SLC7-EWS Ch.ID
0.6	-9.0	5.2	-3.7	-3.2	-8.4	---	---	---	---
RDS DATA						RT			
PI	PS	BLER	CT	TP	TA	DATA			
5123	FalconXT	074	%	OK	ON	I'll Be There For You / OnAir Now by Bon Jovi			
M/S	DI	PTY	FILTERS			Radio TEXT service by Falcon XT-R			
MUSIC	STEREO STATIC	NO_PROG	OK			0			
RT	AF	EON	IH			PIN & PTYN			
OK	OK	OK	---			PIN-DATE			
TMC	RT+	ODA-1	ODA-2			PIN-HOUR			
---	---	---	---			PIN-MINUTE			
LA	EG	ILS	LSN			PTYN			
OFF	OFF	OFF	000			---			
RDS GROUPS						GROUP-DATA			
---						0A 2A 4A 14A			

13.1.6 RDS Group Transmission Alarm

An alarm is now included to monitor the transmitted Rds groups. A mask allows to define all groups present in the transmission and an alarm is raised if after the timeout one or more groups hasn't been received. The Group Mask is an 32bits integer in HEX. Every bit in this mask is referred to a Rds group. The Group Mask bit0 is the 0A group, the bit1 is the 0B group, the bit2 is the 1A and so on ... Example: 11 (0A and 2A)

DEVIATION						SLC			
MPX	Audio - MPX	Pilot	RDS			SLC0-paging/ECC	SLC1-TMC	SLC2-paging	SLC3-Lang.Codes
56.97	46.66	6.28	4.03			---	---	---	---
Imbalance	Mono	E.MpxPw	Peak-L	Peak-R	RMS-L	SLC4	SLC5	SLC6-Broad.use	SLC7-EWS Ch.ID
0.6	-9.0	5.2	-3.7	-3.2	-8.4	---	---	---	---
RDS DATA						RT			
PI	PS	BLER	CT	TP	TA	DATA			
5123	FalconXT	074	%	OK	ON	I'll Be There For You / OnAir Now by Bon Jovi			
M/S	DI	PTY	FILTERS			Radio TEXT service by Falcon XT-R			
MUSIC	STEREO STATIC	NO_PROG	OK			0			
RT	AF	EON	IH			PIN & PTYN			
OK	OK	OK	---			PIN-DATE			
TMC	RT+	ODA-1	ODA-2			PIN-HOUR			
---	---	---	---			PIN-MINUTE			
LA	EG	ILS	LSN			PTYN			
OFF	OFF	OFF	000			---			
RDS GROUPS						GROUP-DATA			
---						0A 2A 4A 14A			

Available the status variable and the trap as well as all parameters to control the state (Timeout, Validation, Hold and Mask)

Wolf2MS

Monitoring

Tuner-1 Data

Tuner-2 Data

Settings

Setup

Admin

Tuner-1

Tuner-2

Audio

Logout

GLOBAL

RF_{L2}

RF_{L1}

RF_{H1}

RF_{H2}

DEV

PILOT_L

PILOT

RDS_L

RDS

AUDIO_{DEV}

AUDIO_L

AUDIO_R

AUDIO_{MON}

AUDIO_{SL}

PI

PS

TP

TA

CT

RT

AF

EON

IH

TMC

RT₊

ODA₁

ODA₂

BLER

GROUPS

FILTERS

TUNER-1 - RDS GROUPS TRANSMISSION

Channels Identification

Parameters Setting - Use Mouse (Drag or Wheel) to scroll

Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Groups Mask	Timeout	Validation	Hold	Mask
1	Rai Radio 1	89.50 MHz	Preset-1	2 sec	unmasked	00000001	60 sec	10 sec	10 sec	masked
2	Rai Radio 2	89.00 MHz	Preset-2	3 sec	masked	00000001	60 sec	10 sec	10 sec	masked
25	Radio Gamma 93.00	93.00 MHz	Preset-25	2 sec	unmasked	00000001	60 sec	10 sec	10 sec	masked
26	Unknow 105.00	105.00 MHz	Preset-26	3 sec	masked	00000001	60 sec	10 sec	10 sec	masked
27	Local Axel 100.8	100.80 MHz	Preset-27	4 sec	unmasked	10000111	60 sec	10 sec	10 sec	unmasked
28	Chan28 Label	100.00 MHz	Preset-28	5 sec	masked	00000001	60 sec	10 sec	10 sec	masked
29	Chan29 Label	100.10 MHz	Preset-29	2 sec	unmasked	00000001	60 sec	10 sec	10 sec	masked

8°HEX

7°HEX

6°HEX

5°HEX

4°HEX

3°HEX

2°HEX

1°HEX

15B	15A	14B	14A	13B	13A	12B	12A	11B	11A	10B	10A	9B	9A	8B	8A	7B	7A	6B	6A	5B	5A	4B	4A	3B	3A	2B	2A	1B	1A	0B	0A
4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit
0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
HEX=1	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	

Example:

Check 11A,7A,5A,1B,1A,0A =0040440D

Check 15A,14A,4A,0A=50000101

RDS DATA

ALARM

PI	PS	BLER	CT	TP	TA
5123	k	054 %	OK	ON	OFF
M/S	DI	PTY	FILTERS	GROUPS	
MUSIC	STEREO STATIC	NO_PROG	OK	NO	
RT	AF	EON	IH		
OK	OK	OK			
TMC	RT+	ODA-1	ODA-2		
---	---	---	---		
LA	EG	ILS	LSN		
OFF	OFF	OFF	000		

RT

ALARM

DATA	A/B		
Spaceman / OnAir Now by 4 Non Blondes	1		
Always / OnAir Now by Bon Jovi	0		
PIN & PTYN			
PIN-DATE	PIN-HOUR	PIN-MINUTE	PTYN
--	--	--	-----
RDS GROUPS	ALARM		
GROUP-DATA			
0A 2A 4A 14A			

25	Radio Gamma 93.00	93.00 MHz	Preset-25	2 sec	unmasked	00000001	60 sec	10 sec	10 sec	masked
26	Unknow 105.00	105.00 MHz	Preset-26	3 sec	masked	00000001	60 sec	10 sec	10 sec	masked
27	Local Axel 100.8	100.80 MHz	Preset-27	4 sec	unmasked	50000111	60 sec	10 sec	10 sec	unmasked
28	Chan28 Label	100.00 MHz	Preset-28	5 sec	masked	00000001	60 sec	10 sec	10 sec	masked
29	Chan29 Label	100.10 MHz	Preset-29	2 sec	unmasked	00000001	60 sec	10 sec	10 sec	masked

8°HEX

7°HEX

6°HEX

5°HEX

4°HEX

3°HEX


2°HEX

1°HEX


15B	15A	14B	14A	13B	13A	12B	12A	11B	11A	10B	10A	9B	9A	8B	8A	7B	7A	6B	6A	5B	5A	4B	4A	3B	3A	2B	2A	1B	1A	0B	0A
4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit
0	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
HEX=5	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	HEX=0	

13.1.7 The Alternative Channel and the Adjacent Channel

The Adjacent Channel is the measure of the level closer to -100kHz and +100 kHz respect the fundamental carrier frequency measured. This measure could indicate that at +100 kHz or -100kHz there is a carrier (or another kind of disturb) which could affect the measurement of the fundamental frequency.

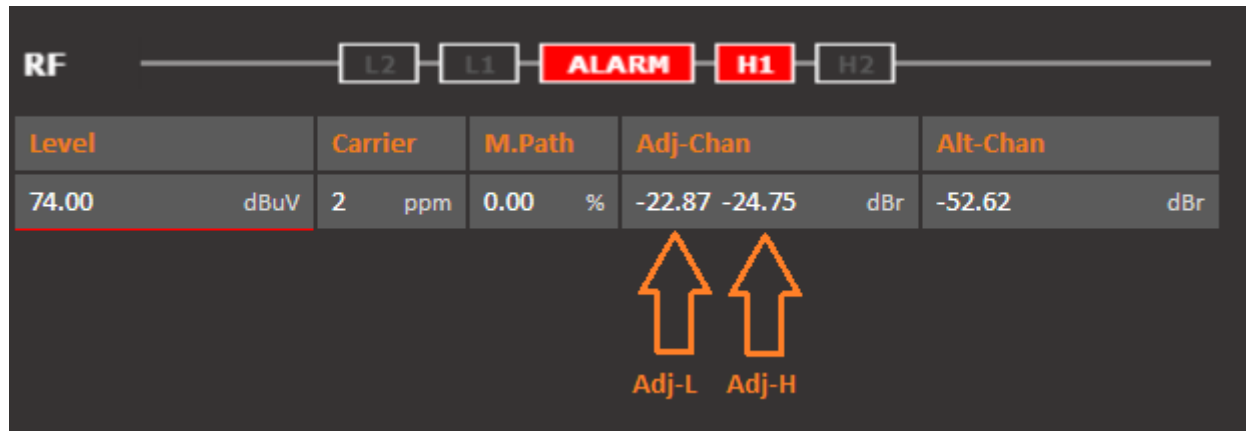

The Alternative Channel instead is exactly the same extent as set out above, but measured and +200 kHz-200 kHz. It is shown, however, only the worst value, that is the most high and thus may cause more noise than our fundamental frequency.

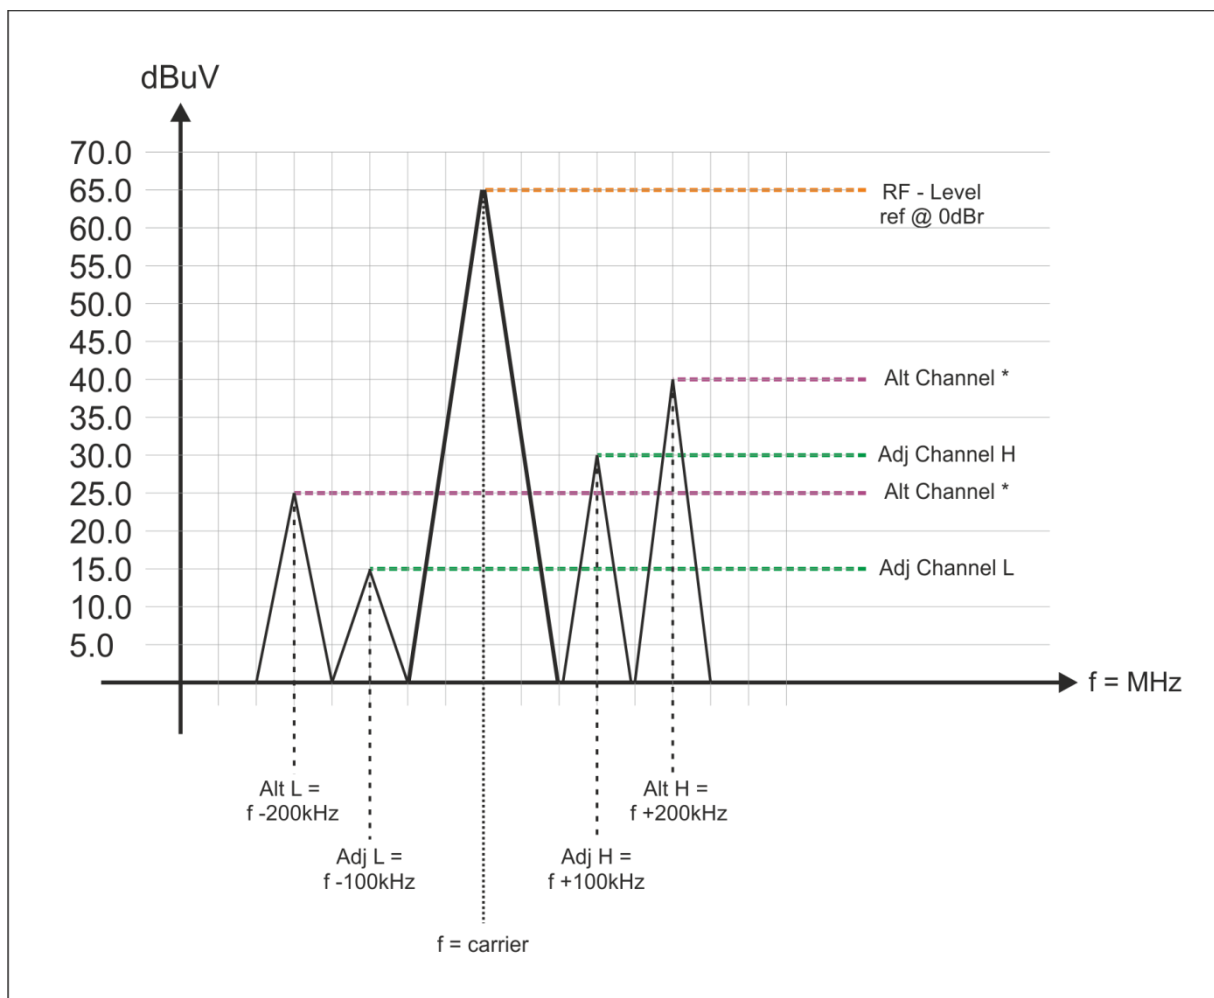

13.1.8 Tuner-1 Data – AF01-32 AF33-64

Before any explanation about how does Wolf 1MS/2MS decode and show AF frequency, some information on how does AF Lists are encoded by RDS Encoders.

There are two ways to transmit lists of alternative frequencies: **Method A** and **Method B**.

In both cases the lists should include only those frequencies for the nearest transmitters and repeaters (with overlapping coverage areas). Generally speaking, **Method A** is used when the list contains no more than 25 frequencies, and **Method B** when the list is longer (for a maximum of 24 lists). **Method B** is recommended when splitting areas or when different programs are broadcast.

NOTE: use of encoding method A or B is not explicitly assigned by a dedicated signal to the receiver, as the latter is capable of identifying which method is used by analyzing the transmitted data structure (whether or not they are organized in pairs).

METHOD A

Compile the AF1 list assigning the tuning frequency (i.e. the frequency carrying the list of alternative frequencies) in the first position, and then continue in strictly increasing order with the alternative frequencies transmitting exactly the same program.

We recommend recording the alternative frequencies (those of adjacent transmitters and repeaters with overlapping coverage areas) on each transmitter, being careful that the first position indicates the frequency carrying the list of alternative frequencies.

METHOD B

As mentioned earlier, Method B is used with high numbers of alternative frequencies and/or when the transmitter also has frequencies that broadcast different radio program at various times of day (splitting, local programming, etc.).

In the latter instance, the mobile receiver should check whether the AF is broadcasting the same content before selecting another frequency.

Each list begins with the *tuning* frequency (for which the list is valid) and then contains up to 12 **pairs of frequencies** in sequence, each containing the *tuning* frequency and an alternate. If there are more than 12 possible alternative frequencies, the list continues in other lists in the same manner.

The order of the frequencies in each pair follow the rules below:

- If the order is increasing, the alternative frequency broadcasts the same programming as the *tuning* frequency.
 - If the order is decreasing, the two frequencies have different programming
-

By pressing AF01-32 it is possible to see all the decoded value by the RDS data Stream from Wolf 2MS. The maximum number of AF are up to 64 with EON service (reported next chapter).

The screenshot shows the Wolf2MS web interface. At the top, there's a navigation bar with 'Monitoring', 'Settings', and 'Logout' buttons. Below this, there's a 'Tuner-2' section with 'STEREO', 'TUNED', and 'RDS' tabs. The main area displays a table of AF lists (List-1 to List-32) with columns for frequency and channel label. Annotations (A), (B), (R), and (?) are placed over specific cells in the table to indicate different insertion methods. A red circle highlights the 'AF01-32' button in the top navigation bar.

The AF lists can be ordered and see nearby each single AF some letters as reported in the picture. The letters between brackets represents different insertion method.


(A) The AF list has been inserted as Method A. Respect the main AF frequency the AF are in increasing order with alternative frequency transmitting exactly the same program.

(B) The AF list has been inserted as Method B. In particular List 2 has been inserted in Method B with increasing order, that means that the AF is broadcasting the same program.

(R) This indication means that the order of the AF is not increasing but decreasing. In this case it means that the AF is broadcasting for a part of the day a different program, and *sometimes* should have different program. The example is in List-4

(?) This question mark means that the AF list has been inserted in a wrong way. It is not Method A increasing mode, it is not Method B increasing/decreasing mode. So it means that the AF list has been inserted in a wrong mode.

NOTE: The refresh of lists AF can be done manually by pressing the "Reset AF List" or whenever a change is detected by PI Code lists are placed in AF mode growing.

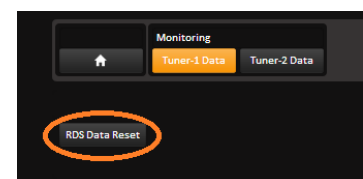

13.1.9 Tuner-1 Data – The EON page

The EON are sorted by PI increasing. Also in this case the sorting and refreshing takes place dynamically.

Wolf2MS

AXEL TECHNOLOGY

Monitoring

Tuner-1 Data

Tuner-2 Data

Settings

Setup

Admin

Tuner-1

Tuner-2

Audio

Logout

RDS Data Reset

MAIN

AF01-32

AF33-64

EON

STATS

TUNER-2

STEREO

TUNED

RDS

Ch. Mem.	Frequency	Channel Label	Mode
1	100.80 MHz	Chan1 Label	STATIC

EON-1

PI	PS	PIN	DATE	HOUR	MINUTE		
5001	NETWRK01		--	--	--		
TP	TA	LA	EG	ILS	LSN	AF	PTY
OFF	OFF	OFF	OFF	OFF	000	NO	NO_PROG

EON-2

PI	PS	PIN	DATE	HOUR	MINUTE		
5854			--	--	--		
TP	TA	LA	EG	ILS	LSN	AF	PTY
OFF	OFF	OFF	OFF	OFF	000	NO	NO_PROG

EON-3

PI	PS	PIN	DATE	HOUR	MINUTE		
6019			--	--	--		
TP	TA	LA	EG	ILS	LSN	AF	PTY
OFF	OFF	OFF	OFF	OFF	000	NO	NO_PROG

EON-4

PI	PS	PIN	DATE	HOUR	MINUTE		
6C63			--	--	--		
TP	TA	LA	EG	ILS	LSN	AF	PTY
OFF	OFF	OFF	OFF	OFF	000	NO	NO_PROG

EON-5

PI	PS	PIN	DATE	HOUR	MINUTE		
9061	NETWRK01		--	--	--		
TP	TA	LA	EG	ILS	LSN	AF	PTY
OFF	OFF	OFF	OFF	OFF	000	NO	NO_PROG

EON

ALARM

Networks number
5

EON-6

PI	PS	PIN	DATE	HOUR	MINUTE		
---	-----		--	--	--		
TP	TA	LA	EG	ILS	LSN	AF	PTY
---	---	---	---	---	---	---	-----

EON-7

PI	PS	PIN	DATE	HOUR	MINUTE		
---	-----		--	--	--		
TP	TA	LA	EG	ILS	LSN	AF	PTY
---	---	---	---	---	---	---	-----

EON-8

PI	PS	PIN	DATE	HOUR	MINUTE		
---	-----		--	--	--		
TP	TA	LA	EG	ILS	LSN	AF	PTY
---	---	---	---	---	---	---	-----

EON-9

PI	PS	PIN	DATE	HOUR	MINUTE		
---	-----		--	--	--		
TP	TA	LA	EG	ILS	LSN	AF	PTY
---	---	---	---	---	---	---	-----

EON-10

PI	PS	PIN	DATE	HOUR	MINUTE		
---	-----		--	--	--		
TP	TA	LA	EG	ILS	LSN	AF	PTY
---	---	---	---	---	---	---	-----

13.1.10 The STATS page

The Stats page shows the statistic of the RDS groups received and the total number of the RDS groups. Using Stats page it is also possible to records the groups and using the filtering function with stop, clear and download of all the Rds datas recorded.

Wolf2MS AXEL TECHNOLOGY

Monitoring: Tuner-1 Data, **Tuner-2 Data** | Settings: Setup, Admin, Tuner-1, Tuner-2, Audio | Logout

RDS Data Reset | MAIN | AF01-32 | AF33-64 | EON | **STATS**

TUNER-2 | STEREO | TUNED | RDS

Ch. Mem.	Frequency	Channel Label	Mode
1	100.80 MHz	Chan1 Label	STATIC

GROUP STATS

Group	Number	%
0A	290	53.0
1A	0	0.0
2A	160	29.3
3A	0	0.0
4A	1	0.2
5A	0	0.0
6A	0	0.0
7A	0	0.0
8A	0	0.0
9A	0	0.0
10A	0	0.0
11A	0	0.0
12A	0	0.0
13A	0	0.0
14A	96	17.6
15A	0	0.0

RDS STREAM

Group	Number	%
0B	0	0.0
1B	0	0.0
2B	0	0.0
3B	0	0.0
4B	0	0.0
5B	0	0.0
6B	0	0.0
7B	0	0.0
8B	0	0.0
9B	0	0.0
10B	0	0.0
11B	0	0.0
12B	0	0.0
13B	0	0.0
14B	0	0.0
15B	0	0.0

Group Filter

Group	Filter
0A	☒
1A	☒
2A	☒
3A	☒
4A	☒
5A	☒
6A	☒
7A	☒
8A	☒
9A	☒
10A	☒
11A	☒
12A	☒
13A	☒
14A	☒
15A	☒

Data Group

Filtered	Total
140	140

0A 5123 040A E75F 6F6E on
14A 5123 E40E 0000 5001
14A 5123 E400 4E45 5001
0A 5123 040F 5F73 5854 XT
2A 5123 241F 2020 2020
0A 5123 0408 5F7D 4661 Fa
2A 5123 2410 4C69 7669 Livi
2A 5123 2411 6E27 204F n' O
0A 5123 0409 7D7E 6C63 lc
0A 5123 040A EB73 6F6E on
0A 5123 040F 737D 5854 XT
14A 5123 E401 5457 5001
0A 5123 0408 7387 4661 Fa
0A 5123 0409 7391 6C63 lc
2A 5123 2412 6E20 4120 n A
2A 5123 2413 5072 6179 Pray
0A 5123 040A 1619 6F6E on

Groups Received: 547 | DOWNLOAD | STOP | RESTART

GROUP STATS		
Group	Number	%
0A	290	53.0
1A	0	0.0
2A	160	29.3
3A	0	0.0
4A	1	0.2
5A	0	0.0
6A	0	0.0
7A	0	0.0
8A	0	0.0
9A	0	0.0
10A	0	0.0
11A	0	0.0
12A	0	0.0
13A	0	0.0
14A	96	17.6
15A	0	0.0

Group	Number	%
0B	0	0.0
1B	0	0.0
2B	0	0.0
3B	0	0.0
4B	0	0.0
5B	0	0.0
6B	0	0.0
7B	0	0.0
8B	0	0.0
9B	0	0.0
10B	0	0.0
11B	0	0.0
12B	0	0.0
13B	0	0.0
14B	0	0.0
15B	0	0.0

Groups Received547

This part of Stats page shows the number of packet that have passed into Rds stream, the number and the percentage. This part of Stats page is viewing only.

13.2 SETUP

In this page it's possible to set some working parameters about Wolf 2MS. This section is divided in four different sub-sections: MAIN -1, MAIN -2, NMS 1-2, NMS 3-4

13.2.1 MAIN -1 Page

Wolf2MS

Monitoring

Tuner-1 Data

Tuner-2 Data

Settings

Setup

Admin

Tuner-1

Tuner-2

Audio

Logout

MAIN-1

MAIN-2

NMS 1-2

NMS 3-4

GENERAL SETUP

NAME

Target Name Ref

Axel Technology

Target Location Ref

Pluto

Target Operator Ref

Gabriele Rocchini

AUDIO IO SETTINGS

Analogic Output mode

audio1source

Analogic Output gain

11.00 dB

Analogic Input Ref

0.00 dBu

Digital Output mode

disabled

Digital Output gain

0.00 dB

Digital Input Ref

-15.00 dBfs

Khz to dBr Conversion

75.00 kHz

GLOBAL SETUP

Front Panel

enabled

HTTP SETTINGS

HTTP Band Mode

normalBand

HTTP streamer auto kick out

0

Http Streamer Players

enabled

OTHER SETTINGS

Language

English

In the **NAME** box and Target Name Reference and Target Location reference are written all the information about the Wolf 2MS, where it is installed and some other extra information.

Analogic output mode	audio1source	Analogic Output Mode: Disable – Audio1Source – Audio2Source	
Analogic output gain	0.00 dB	Analogic Output Gain: between -20.0dB up to 20.0dB in 0.1step/dB	
Analogic Input Ref	0.00 dBu	Analogic Input Ref: This reference will be used to convert from external analogic level in dBu to the internal dBr reference.	
Digital output mode	audio1source	Digital Output Mode: Disable – Audio1Source – Audio2Source	
Digital Input Ref	-15.00 dBfs	Digital Input Reference: This reference will be used to convert from external digital level in dBfs to the internal dBr reference.	
Digital input gain	0.00 dB	Digital Input Gain: between -20.0dB up to 20.0dB in 0.1step/dB	

| WOLF 2MS WEB PAGE 58

AxelTech

Front Panel enabled	Front Panel: should enable or not the front palenl operation.	
HTTP streamer auto kick out 0	HTTP Streamer auto kick out: timeout in minutes about the audio streaming from Wolf 2MS to the webpage.	
Khz to dBr Conversion 1.00 kHz	kHz to dBr Conversion: converts the tuner audio level from the audio deviation in kHz to the internal reference dBr.	
Digital Output gain 0.00 dB	Digital Output Gain: between -20.0dB up to 20.0dB in 0.1step/dB	
Front Panel enabled	Front Panel: This control allows the user to manage Wolf 1MS/2MS to be managed by front panel. If it is set on disable front panel encoder is unable to set functions	
HTTP Band Mode normalBand	HTTP Band Mode: Settings for the network band audio available. Available set: Low/Normal/High band or GPRS Band	
Http Streamer Players enabled	HTTP Streamer Player: Enables or Disable the streaming function for each player.	
Language English	Language: language selection for Wolf 1MS/2MS	

13.2.2 MAIN -2 Page

Wolf2MS

AXEL
TECHNOLOGY

Monitoring

Tuner-1 Data

Tuner-2 Data

Settings

Setup

Admin

Tuner-1

Tuner-2

Audio

Logout

MAIN-1MAIN-2NMS 1-2NMS 3-4

GENERAL SETUP

RDS DATA STREAM

RDS Stream Setup

serialTun1

Rds Ueep Rebroadcasting

PS

ACTIVITY HEART SIGNAL

Trap Dispatch Timing

0 min

SMTP SETTING

Smtip Server Ip Address

0.0.0.0

Smtip Server User Name

user

Smtip Server Password

user

Smtip eMail 1 Address

user1@mail.it

Smtip eMail 2 Address

user2@mail.it

Smtip eMail 3 Address

user3@mail.it

Smtip eMail 4 Address

user4@mail.it

SNMP SETTING

Read Community

public

Write Community

private

TIME AND NTP SETTINGS

IP Address

193.204.114.105

Auto Request Time

2 min

Failure Trap

trapEnable

Failure Email

emailEnable

Local Time Set

Sync to PC Time

Local Time Zone Definition

Europe/Rome

FTP SETTING

Log File

LogMode1

In the Tab MAIN-2 it is possible to set other parameter about Wolf 2MS. Some of these parameters are under development.


SNMP SETTING Read Community public Write Community private	In this box it is possible to set the password for the SNMP protocol in read and write.	
TIME AND NTP SETTINGS IP Address 69.25.96.13 Auto Request Time 1 Failure Trap trapEnable Failure Email emailEnable Local time set string --- Sync to PC Time Time zone definition paris	IP Address: is the IP of the NTP server. Auto Request Time: minutes between each single Time Synch. 0 = time synch disable 1440 = max day-time synch Failure Trap: If Wolf 2MS is not able to set the time a trap is sent to NSM. Failure Email: If Wolf 2MS is not able to set the time an email is sent to the Email recipient Local time Set String: it's possible to send a time synch command via PC Time Zone definition: it's possible to set the GMT Time zone from this control	

FTP SETTING Log File LogMode1	This version of log file will catch all alarms, regardless all trap's enable status. <i>status.log</i> will be download in ftp mode: id: user, pwd: user To reset <i>status.log</i> file is necessary to disable and re-enable in LogMode1.	The log file is enabled under MAIN2 → FTP Settings → Log File →LogMode1
RDS Stream Setup serialTun1 Rds Uecp Rebroadcasting PS	RDS Stream Setup: it is possible to decode the RDS Data Stream and deliver it to the Serial Port in UECP format. It is possible to select of the Tuner to decode RDS Uecp ReBroadcasting: It is possible to filter what service can be delivered to the serial output. In ie only the PS. But other options are available	
ACTIVITY HEART SIGNAL Trap Dispatch Timing 0 min	Activity Heart Signal: each “n” minutes as express in the box, the Wolf 2MS send a trap to the NMS System in order to understand that the Wolf 2MS is “alive” and working correctly	


13.2.2.1 SMTP SETTINGS – EMAIL NOTIFICATIONS

It's possible to receive the Wolf 1MS 2MS alarms through an ALERT email.
You need to follow the next steps to activate the critical notification by mail.


1. Install HmailServer from <https://www.hmailserver.com/download>
2. Following the steps in this video https://www.youtube.com/watch?v=1TN_FJ5hfJO
3. Set the Domain as axeltechnology.com,

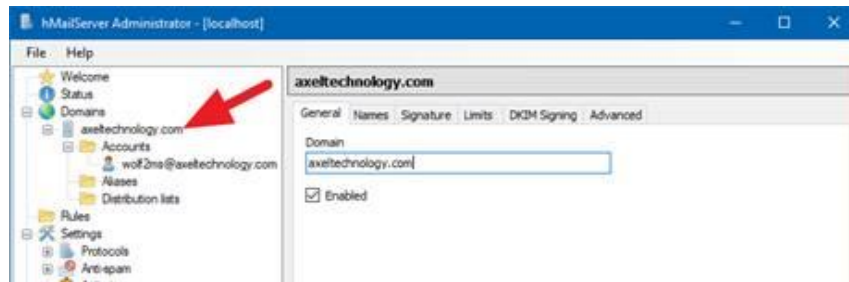


4. Then add this account **wolf2ms**

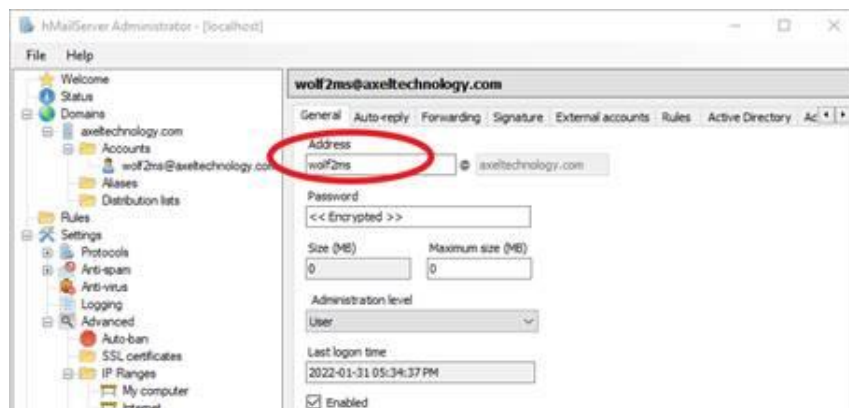

5. Go to **settings > advance > IP ranges > internet** and remove the **Require SMTP authentication**

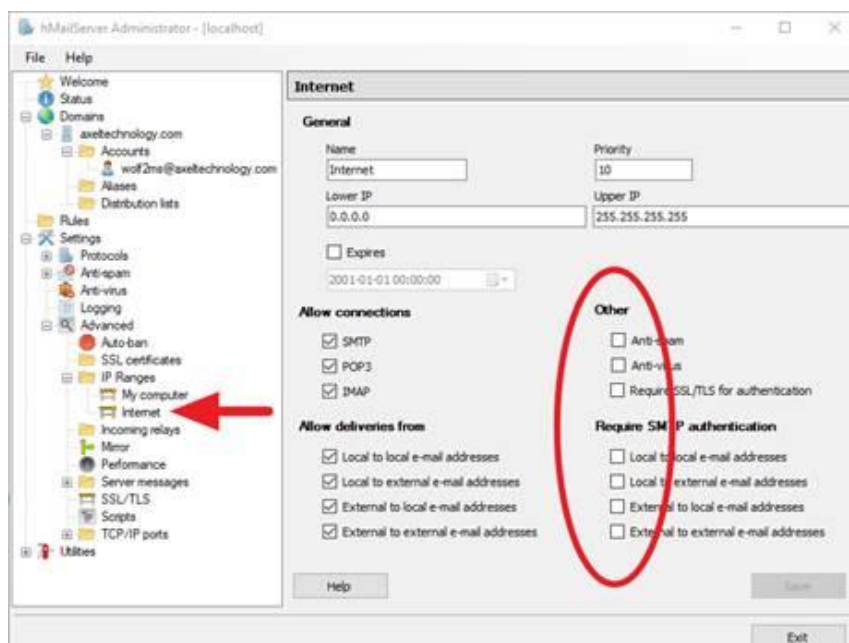


6. Then go to your **WOLF 1MS 2MS** web interface
LOGIN the go to
Setup > MAIN-2 > smtp server ip address then add IP of your HmailServer (ip of your pc).
Setup > MAIN-2 > USER NAME
Setup > MAIN-2 > Password

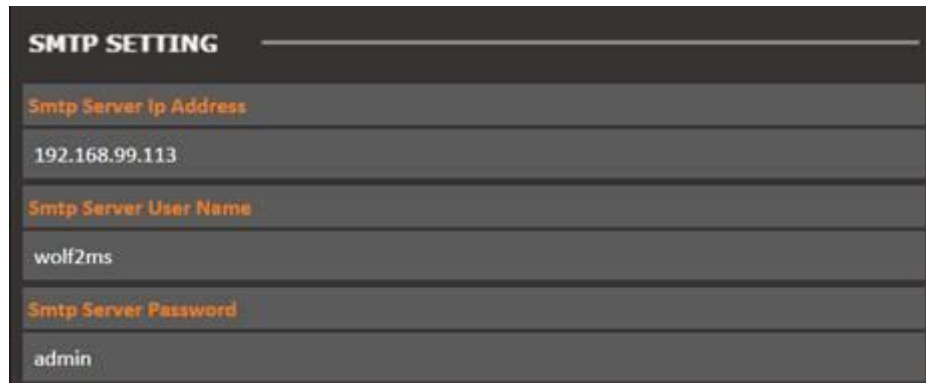

The screenshot shows a web interface titled "SMTP SETTING". It contains three input fields with labels in orange text: "Smtp Server Ip Address" with the value "192.168.99.113", "Smtp Server User Name" with the value "wolf2ms", and "Smtp Server Password" with the value "admin".

7. Last you can add the **SEND TO** mail up to 4 mail receivers.

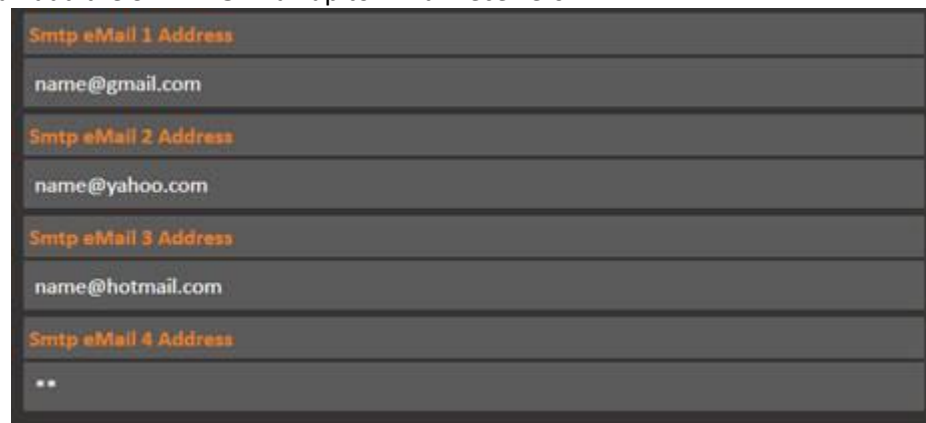


The screenshot shows a web interface titled "SEND TO". It contains four input fields with labels in orange text: "Smtp eMail 1 Address" with the value "name@gmail.com", "Smtp eMail 2 Address" with the value "name@yahoo.com", "Smtp eMail 3 Address" with the value "name@hotmail.com", and "Smtp eMail 4 Address" with the value " ".

13.2.3 Note about NTP Settings and behavior

To activate the NTP auto synchronization set a not zero value in AutoRequest Time. After a modification of this parameter or a modification of the NTP IP address, the Wolf2MS will try to synchronize the system clock. After the first synchronization, the server will be contacted automatically with the selected period in minutes.

After a system reboot or restart, if AutoRequestTime is activated, in the first operative minute the NTP-V3 server will be contacted, as well as after the selected period.

The NtpSynch status starts as OK (synchronized) at the system startup, but after the first synchronization attempt it will show the real status. Every NtpSync status variation is signaled (if enabled) with the NtpFailureNotificationTrap.

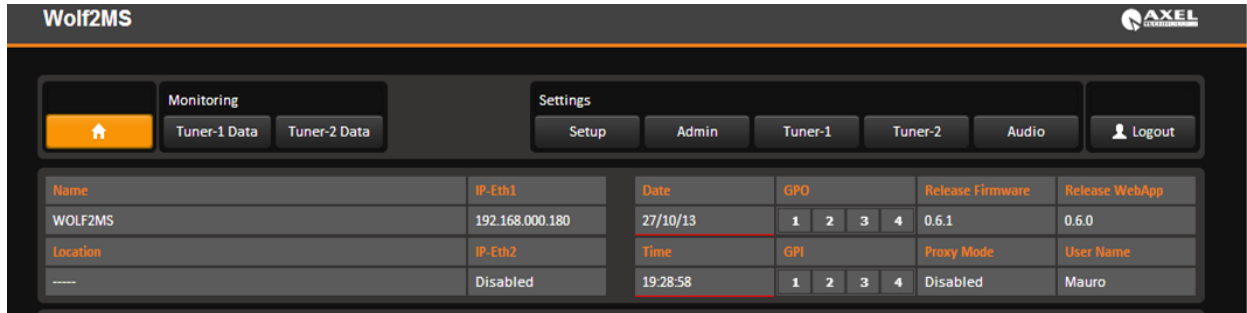

An NTP synchronization failure will be indicated with a red alarm line under the Date/Time field. Moreover, Date and time will blink in the display panel in case of synchronization failure.

Starting from Fw release 1.0.4 the NTP behavior has been modified. Wolf 2MS tries for 3 minutes a replies from the NTP server before reporting an error. In previous release Wolf 2MS replies immediately about the NTP loss. In case of alarm, Wolf 2MS tries each single minute until Wolf 2MS gets a reply from NTP server.

With this new feature, random errors caused by NTP loss are no longer reported. No more parameters have been added to mask this kind of alarm.

Description	Source	Time
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iNtpAlarmStatusNotify	192.168.0.180	2013-10-29 07:27:53
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-29 07:26:53
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PlotLowLevelAlarmStatusNotify	192.168.0.180	2013-10-29 07:22:21
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PlotLevelAlarmStatusNotify	192.168.0.180	2013-10-29 07:21:21
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2RfMpx.tuner2RfMpxPrefix.iTun2PlotLowLevelAlarmStatusNotify	192.168.0.180	2013-10-29 07:21:21
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1RdsLevelAlarmStatusNotify	192.168.0.180	2013-10-29 07:20:31

Source:	192.168.0.180	Timestamp:	11 minutes 31 seconds	SNMP Version:	2
Trap OID:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iNtpAlarmStatusNotify				
Variable Bindings:					
Name:	iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0				
Value:	[TimeTicks] 11 minutes 31 seconds (69156)				
Name:	snmpTrapOID				
Value:	[OID] iNtpAlarmStatusNotify				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.generalSettings.timeSettings.iNtpAlarmStatus.0				
Value:	[Integer] alarm (1)				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0				
Value:	[OctetString] 2013-10-29 07:28:00				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0				
Value:	[Integer] 24				
Description:	"Ntp failure Notification Trap "				

13.2.4 Note about Activity Heart Signal

This trap will be sent periodically to indicate that the system is OK and the Wolf2MS host process is able to communicate with all its interfaces without apparent problems. One trap will be sent at every change of the time parameter or at the system start-up (few seconds after the cold start SNMP trap), as well as according to the period selected. This Trap will not be replayed.

The value "0" means function disabled. A different value indicates the period in minutes of the signal trap. In the example tested the period is 10 minutes.

Description	Source	Time
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 14:21:51
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 14:11:51
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 14:01:51
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 13:51:50
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 13:41:50
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 13:31:50
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 13:21:50
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 13:11:50
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 13:01:49

Source:	192.168.0.180	Timestamp:	2 hours 35 minutes 17 seconds	SNMP Version:	2
Trap OID:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify				
Variable Bindings:					
Name:	.iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0				
Value:	[TimeTicks] 2 hours 35 minutes 17 seconds (931775)				
Name:	snmpTrapOID				
Value:	[OID] iActivityHeartNotify				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0				
Value:	[OctetString] 2013-10-26 13:01:47				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0				
Value:	[Integer] 59				
Description:	"Normal Activity Signal Trap "				

13.2.5 NMS 1-2 Page

In this setup it is possible to set some parameter about the communication between the Wolf 2MS and the Network Management System. SNMP is the protocol to communicate between remote equipment and NMS.

Wolf2MS

AXEL

Monitoring

Tuner-1 Data

Tuner-2 Data

Settings

Setup

Admin

Tuner-1

Tuner-2

Audio

Logout

MAIN-1

MAIN-2

NMS 1-2

NMS 3-4

GENERAL SETUP

NMS-1 SETTING

IP Address

0.0.0.0

Trap Port

162

Trap Community

public

Trap Global Enabled

enable

Trap Type

trapSnmpV1

Trap Time-Out

10

Trap Retry

10

NMS-2 SETTING

IP Address

0.0.0.0

Trap Port

162

Trap Community

public

Trap Global Enabled

enable

Trap Type

trapSnmpV1

Trap Time-Out

10

Trap Retry

10

NMS-1 SETTING IP Address 192.168.0.203 Trap Port 162 Trap Community public Trap Global Enabled enable Trap Type informSnmpV2 Trap Time-Out 10 Trap Retry 10	In this box it is possible to set the IP Address and the Port to communicate with the Network Management System.	
Trap Community public	This is the Trap Community string	
Trap Global Enabled enable Trap Type informSnmpV2	Trap Global Enable: Enable or Disable the trap notification to the NMS Trap Type: configuration the Trap SNMP version	
Trap Time-Out 10 Trap Retry 10	Trap Time-Out: if the Trap Type is <i>InformSnmpV2</i>, this value set the time between each single retry, expressed in Seconds Trap Retry: if the Trap Type is <i>InformSnmpV2</i>, this value set the maximum number of retry	

13.2.6 NMS 3-4 Page

In this setup it is possible to set some parameter about the communication between the Wolf 2MS and the Network Management System. SNMP is the protocol to communicate between remote equipment and NMS. The same configuration can be found in the NMS 1-2 Page.

Wolf2MS

AXEL
TECHNOLOGY

Monitoring

Tuner-1 Data

Tuner-2 Data

Settings

Setup

Admin

Tuner-1

Tuner-2

Audio

Logout

MAIN-1

MAIN-2

NMS 1-2

NMS 3-4

GENERAL SETUP

NMS-2 SETTING

IP Address

0.0.0.0

Trap Port

162

Trap Community

public

Trap Global Enabled

disable

Trap Type

trapSnmpV1

Trap Time-Out

10

Trap Retry

10

NMS-4 SETTING

IP Address

0.0.0.0

Trap Port

162

Trap Community

public

Trap Global Enabled

disable

Trap Type

trapSnmpV1

Trap Time-Out


10

Trap Retry

10

14 THE ADMIN PAGE

It is possible to manage Users, Profile and right for each single user by using the Admin page.

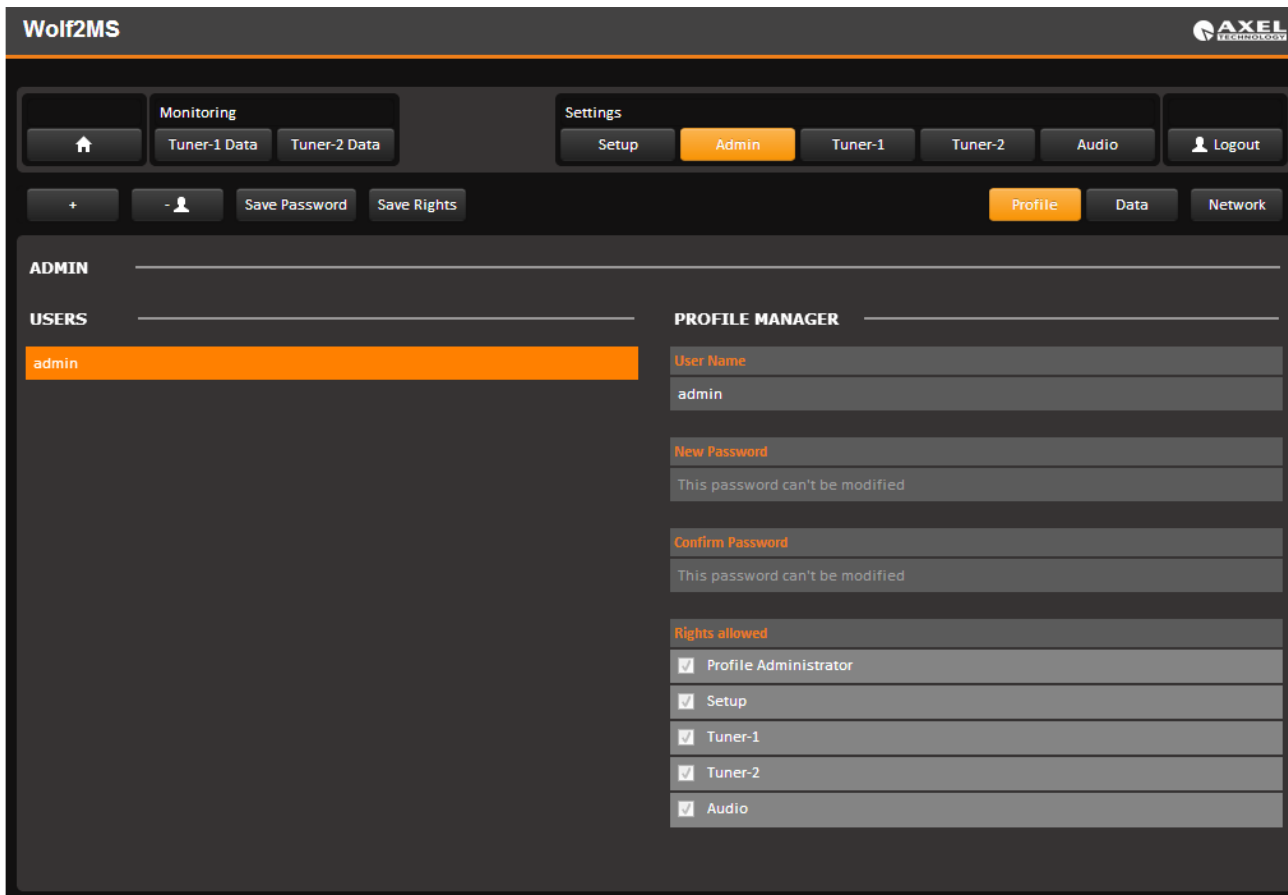

Wolf2MS AXEL TECHNOLOGY

Monitoring: Tuner-1 Data, Tuner-2 Data

Settings: Setup, **Admin**, Tuner-1, Tuner-2, Audio

+ - Save Password Save Rights **Profile** Data Network

ADMIN

USERS

admin

PROFILE MANAGER

User Name: admin

New Password: This password can't be modified

Confirm Password: This password can't be modified


Rights allowed

- ☒ Profile Administrator
- ☒ Setup
- ☒ Tuner-1
- ☒ Tuner-2
- ☒ Audio

14.1 HOW TO LOGIN IN WOLF 2MS

From the Home Wolf 2MS screen it is possible to Login in the system using the initial standard credential. The standard login credential are

Username: **admin**
Password: **admin**

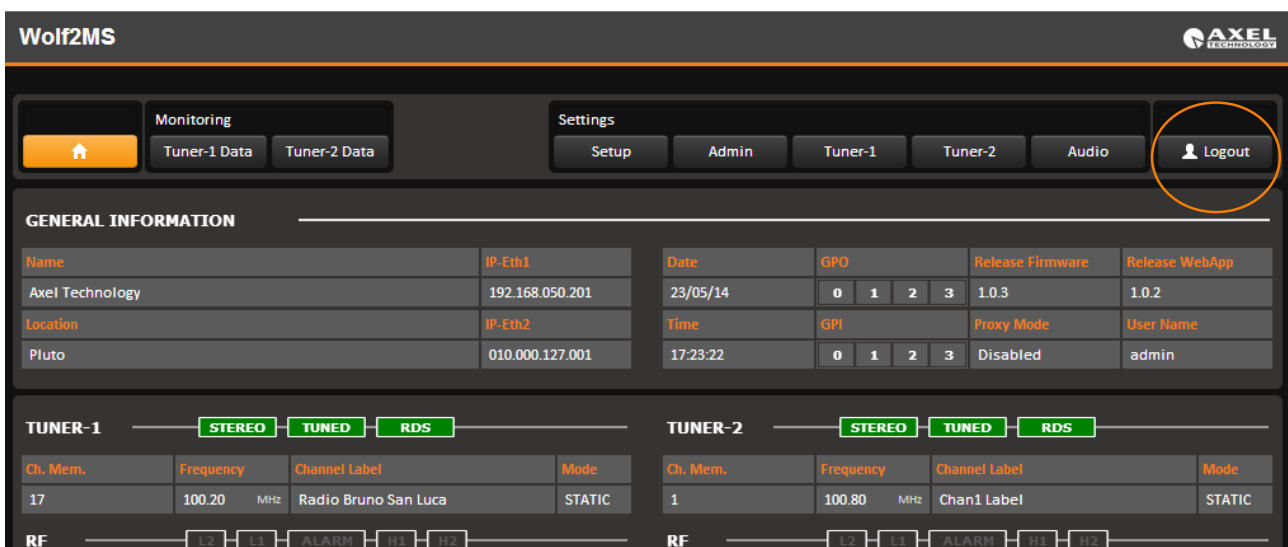

Wolf2MS AXEL TECHNOLOGY

Monitoring: Tuner-1 Data, Tuner-2 Data

Settings: Setup, Admin, Tuner-1, Tuner-2, Audio

Logout

GENERAL INFORMATION

Name	IP-Eth1	Date	GPO	Release Firmware	Release WebApp
Axel Technology	192.168.050.201	23/05/14	0 1 2 3	1.0.3	1.0.2
Location	IP-Eth2	Time	GPI	Proxy Mode	User Name
Pluto	010.000.127.001	17:23:22	0 1 2 3	Disabled	admin

TUNER-1 **STEREO** **TUNED** **RDS**

Ch. Mem.	Frequency	Channel Label	Mode
17	100.20 MHz	Radio Bruno San Luca	STATIC

RF **L2** **L1** **ALARM** **H1** **H2**

TUNER-2 **STEREO** **TUNED** **RDS**

Ch. Mem.	Frequency	Channel Label	Mode
1	100.80 MHz	Chan1 Label	STATIC

RF **L2** **L1** **ALARM** **H1** **H2**

14.2 HOW TO ADD A NEW USER

Once the Administrator is logged in, it is possible to add or remove an User by using the button + and – as reported in the picture.


After pressing + a new page appear, asking the insertion of Username and Password, but the user must take in consideration the below condition.



14.2.1 Consideration on Username and Password

1. Be aware that the user and Admin are case sensitive
2. For the password field there are no minimal limitation
3. No complexion requirement must be reached
4. At least one character must be filled
5. No Empty password allowed
6. The total length is 50 characters
7. Backspace is a character, and considered as character


After pressing the + button this screen appear. Set the username and password and check the single function that the Administrator wants to make available for each single user. By using the already existing functionalities it is possible to flag and allow the user in order to use completely the function flagged. I.e: SETUP – Profile Administrator – Tuner-1 – Tuner-2 – AUDIO.

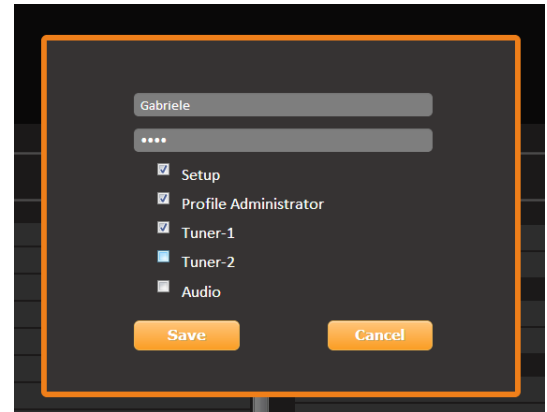

After pressing SAVE the user is created.

14.3 THE ADMINISTRATION TOOLS



The Admin screen is divided in two parts: the Users and the Profile Manager. By using this control it is possible to manage all the rights for each single user.

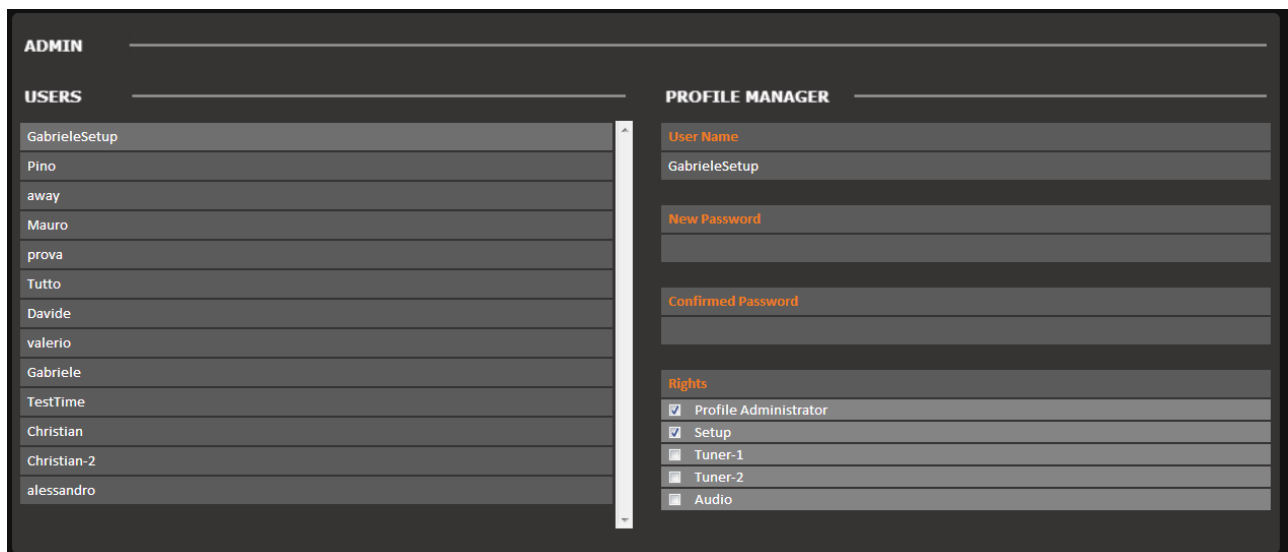


14.3.1 The User Right Management – How to change a Password

In the left side it is possible to see the complete list of user allowed on the Wolf 2MS taken in consideration. By pressing only one click on the User in the left, the profile manager on the right side shows all the allowed functionalities.

Once a user is selected it is possible to change the password, by inserting a new password in the field "NEW PASSWORD" and repeating "CONFIRM PASSWORD". To change the field a double click is required. In order to insert a correct password, the [Consideration on User name and Password](#) must be respected.

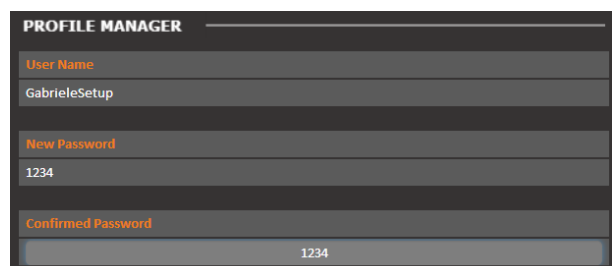


The password appears clearly in the fields, as in the picture. Once the password has been modified, the user must save all the changes by pressing the button "Save Password". When the password has been correctly changed a message appears on the screen, Password Changed. By pressing OK it is possible to go on in other setup.

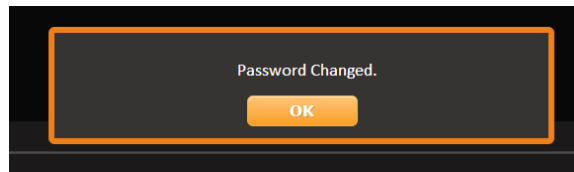


14.3.2 The User Right Management – How to enable/disable features


In the left side it is possible to see the complete list of user allowed on the Wolf 2MS taken in consideration. By pressing only one click on the User in the left, the profile manager on the right side shows all the allowed functionalities. In order to change to a single user a Rights, by simple flag (or unflag) the function on the corresponding box.

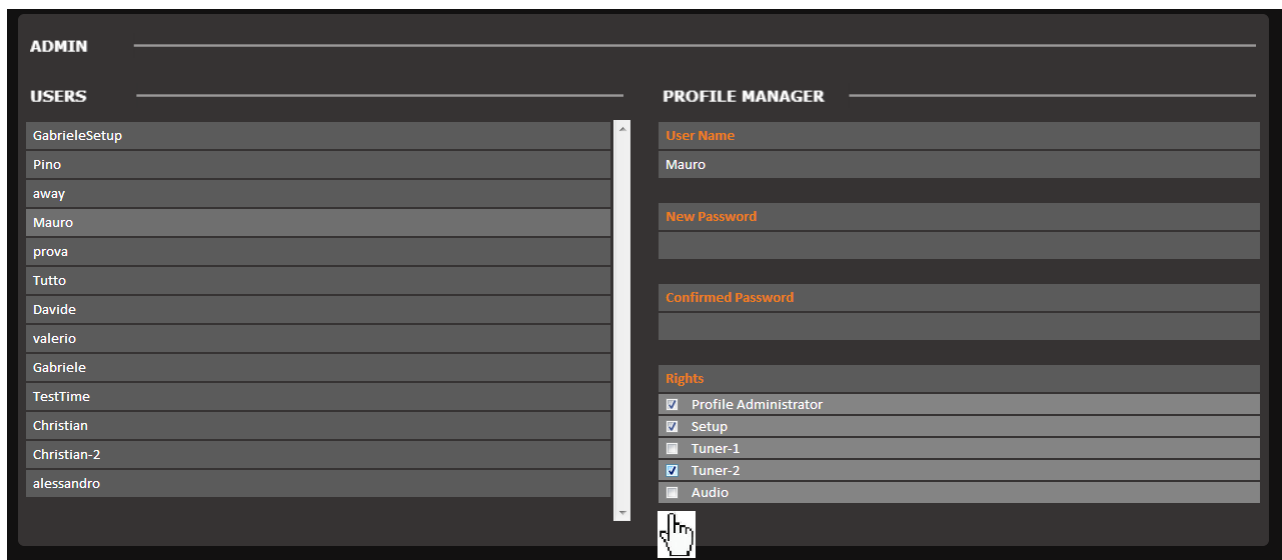

In the example above, the user Mauro is allowed to enter and manage the Profile Administrator, the Setup and the Tuner-2. The user Mauro is not allows to CHANGE or MODIFY Tuner-1 and Audio. To enable the single user also to CHANGE and MODIFY Tuner-1 and Audio, by simply flag the function and press Save Rights.




The webpage will shows a message Permission Changed as reported below to confirm that the Rights has been modified.

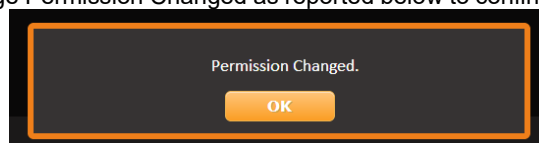

14.3.3 How to logout a user from Wolf 2MS

Logout can be happen for 3 different reason, that are also reported in the table below.

N°	Condition
1	User manually press Logout
2	The user take no action for at least 60 minutes
3	Two user with same username are logged in, from 2 different position, and one of this press logout

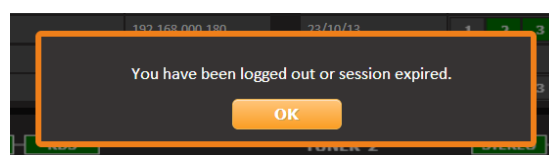

14.4 GENERAL CONSIDERATION ABOUT USER LOGGED IN AND NON LOGGED

Once a Wolf 2MS is connected in a network, by using a simple web browser it is possible to “surf” in the Wolf 2MS and explore all the function. This general consideration must be taken in mind when a Wolf 2MS is used.

N°	No User logged in Wolf 2MS	Note
1	It is possible to see and browse all the Home, Tuner-1 and Tuner-2 data information.	No timing limitation
2	In the Home web page it is possible to start playing the streaming for Audio-1 and Audio-2. If a countdown is allowed, after pressing PLAY, the countdown will start to count down and at the end the streaming will be set to OFF. If no countdown is set, the streaming will be never stop.	
3	In the Tuner-1 Data a non-logged user can enter, and browse inside the submenu MAIN – AF01-32 – AF33-64 – EON. The button STATS is not available. The non-logged user can see and browse but in read-only mode. There is no way to make changes to the measures or wolf 2MS behaviour.	
4	In the Tuner-2 Data a non-logged user can enter, and browse inside the submenu MAIN – AF01-32 – AF33-64 – EON. The button STATS is not available. The non-logged user can see and browse but in read-only mode. There is no way to make changes to the measures or wolf 2MS behaviour.	

Once no user is logged in, the Wolf 2MS shows

Date	GPO	Release Firmware	Release WebApp
23/05/14	0 1 2 3	1.0.3	1.0.2
Time	GPI	Proxy Mode	User Name
17:33:49	0 1 2 3	Disabled	Guest

N°	User logged in Wolf 2MS	Note
1	It is possible to see and browse all the Home, Tuner-1 and Tuner-2 data information.	Timing limitation to 60 minutes. After this time, the user automatically logged out
2	In the Home web page it is possible to start playing the streaming for Audio-1 and Audio-2. If a countdown is allowed, after pressing PLAY, the countdown will start to count down and at the end the streaming will be set to OFF. If no countdown is set, the streaming will be never stop.	
3	In the Tuner-1 Data a logged user can enter, and browse inside the submenu MAIN – AF01-32 – AF33-64 – EON. A RDS Data Reset button appears, and allows the user to reset all the RDS information and restart the RDS data collection.	
4	In the Tuner-2 Data a logged user can enter, and browse inside the submenu MAIN – AF01-32 – AF33-64 – EON. A RDS Data Reset button appears, and allows the user to reset all the RDS information and restart the RDS data collection.	
5	The user can enter in the Settings as per the Rights allowed by the Administrator.	Timing limitation to 60 minutes. After this time, the user automatically logged out.
6	Two or more SAME Username can be logged in and works together, in different place and using different web browser	If one of the two (or more) user press Logout, ALL the other “same-user” connected are logged out.

It is possible to see what user is actually logged in

Date	GPO	Release Firmware	Release WebApp
23/05/14	0 1 2 3	1.0.3	1.0.2
Time	GPI	Proxy Mode	User Name
17:29:20	0 1 2 3	Disabled	admin

14.5 DATA EXPORT AND IMPORT

A new feature still under development, is related to data import and export on Wolf 2MS's SD Card and PC.

14.5.1 On SD Card

The Export allows the user to save the complete Wolf 2MS configuration in a SD Card. Moreover, also MAC Address is exported and saved, so this function allows the user to create a complete "clone" of the Wolf 2MS. This can be useful, once a Wolf 2MS is completely configured to store data on the SD Card, so in case of fault the SD Card can be removed and inserted in a new Wolf 2MS equipment and using the Import function all data can be retrieved and get a complete clone of the faulty equipment. To achieve this function the user must access via front panel, "SECURE DIGITAL CARD MANAGER" and select IMPORT – EXPORT – FORMAT

14.5.2 Using web browser

Via Web browser it is possible to download or upload a configuration, save and store in a PC as a common Json file . Same for Access Log in TXT and same for Trap Event Log as TXT log

The screenshot displays the Wolf2MS web interface. At the top, there's a navigation bar with tabs for Monitoring (Tuner-1 Data, Tuner-2 Data), Settings (Setup, Admin, Tuner-1, Tuner-2, Audio), and a Logout button. Below this, there are buttons for Profile, Data, and Network. The main content area is titled 'ADMIN' and is divided into two sections: 'CONFIGURATIONS' and 'ACCESS LOG'. The 'CONFIGURATIONS' section has 'Upload' and 'Download' buttons. The 'ACCESS LOG' section has 'Refresh' and 'Download' buttons. Below these sections, there are two large text areas displaying logs. The first log area shows a list of timestamps and events, including a login for 'Superadmin' and a logout. The second log area shows a list of timestamps and events, all labeled as 'Trap: ACTIVITY HEART SIGNAL'.

Wolf2MS AXEL TECHNOLOGIES

Monitoring: Tuner-1 Data, Tuner-2 Data | Settings: Setup, **Admin**, Tuner-1, Tuner-2, Audio | Logout

Profile, **Data**, Network

ADMIN

CONFIGURATIONS | **STATUS**

Upload, Download

ACCESS LOG | **STATUS**

Refresh, Download

[2014-02-26 17:45:29] -----
[2014-02-27 17:26:00] -----
[2014-02-27 17:46:01] -----
[2014-02-28 12:20:15] -----
[2014-02-28 12:22:38] -----
[2014-03-04 14:24:54] -----
[2014-03-04 16:22:32] Login: Superadmin, Rights: ADMIN-SETUP-TUNER1-TUNER2-AUDIO
[2014-03-04 16:23:44] Logout: Superadmin


TRAP EVENT LOG | **STATUS**

Refresh, Download

[2014-05-07 09:37:05] Trap: ACTIVITY HEART SIGNAL
[2014-05-07 09:38:05] Trap: ACTIVITY HEART SIGNAL
[2014-05-07 09:39:05] Trap: ACTIVITY HEART SIGNAL
[2014-05-07 09:40:05] Trap: ACTIVITY HEART SIGNAL
[2014-05-07 09:41:05] Trap: ACTIVITY HEART SIGNAL
[2014-05-07 09:42:05] Trap: ACTIVITY HEART SIGNAL
[2014-05-07 09:43:05] Trap: ACTIVITY HEART SIGNAL
[2014-05-07 09:44:05] Trap: ACTIVITY HEART SIGNAL

14.5.3 Network section

By pressing this button it is possible to access and modify the value for Ethernet -1 and Ethernet -2. Can be set IP Address, Subnet mark, and Gateway for each network card. Once the modifying has been done, press “Change ETH1 & Reboot” or “Change ETH2 and Reboot”. The equipment will be rebooted and after restart modifying will be applied. System Reboot button restart the device

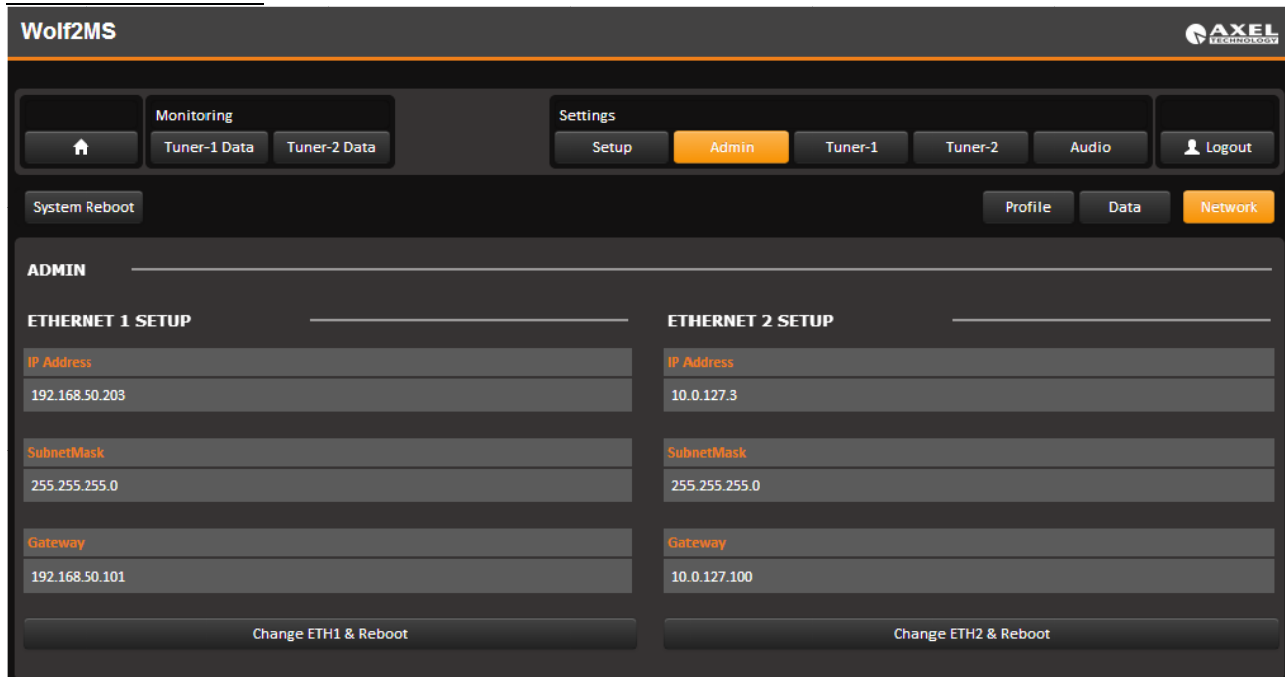

Wolf2MS AXEL TECHNOLOGY

Monitoring: Tuner-1 Data, Tuner-2 Data

Settings: Setup, **Admin**, Tuner-1, Tuner-2, Audio, Logout

System Reboot Profile Data Network

ADMIN

ETHERNET 1 SETUP

IP Address: 192.168.50.203

SubnetMask: 255.255.255.0

Gateway: 192.168.50.101

Change ETH1 & Reboot

ETHERNET 2 SETUP

IP Address: 10.0.127.3


SubnetMask: 255.255.255.0

Gateway: 10.0.127.100

Change ETH2 & Reboot

14.6 SETTINGS – TUNER 1

This page allows the user to manage all the parameters and alarms managed by Wolf 2MS. The MAIN page shows and give the users the capability to set the general parameters as GLOBAL SETTINGS and RECEIVER DEMODULATION SETTINGS of the Wolf 2MS.

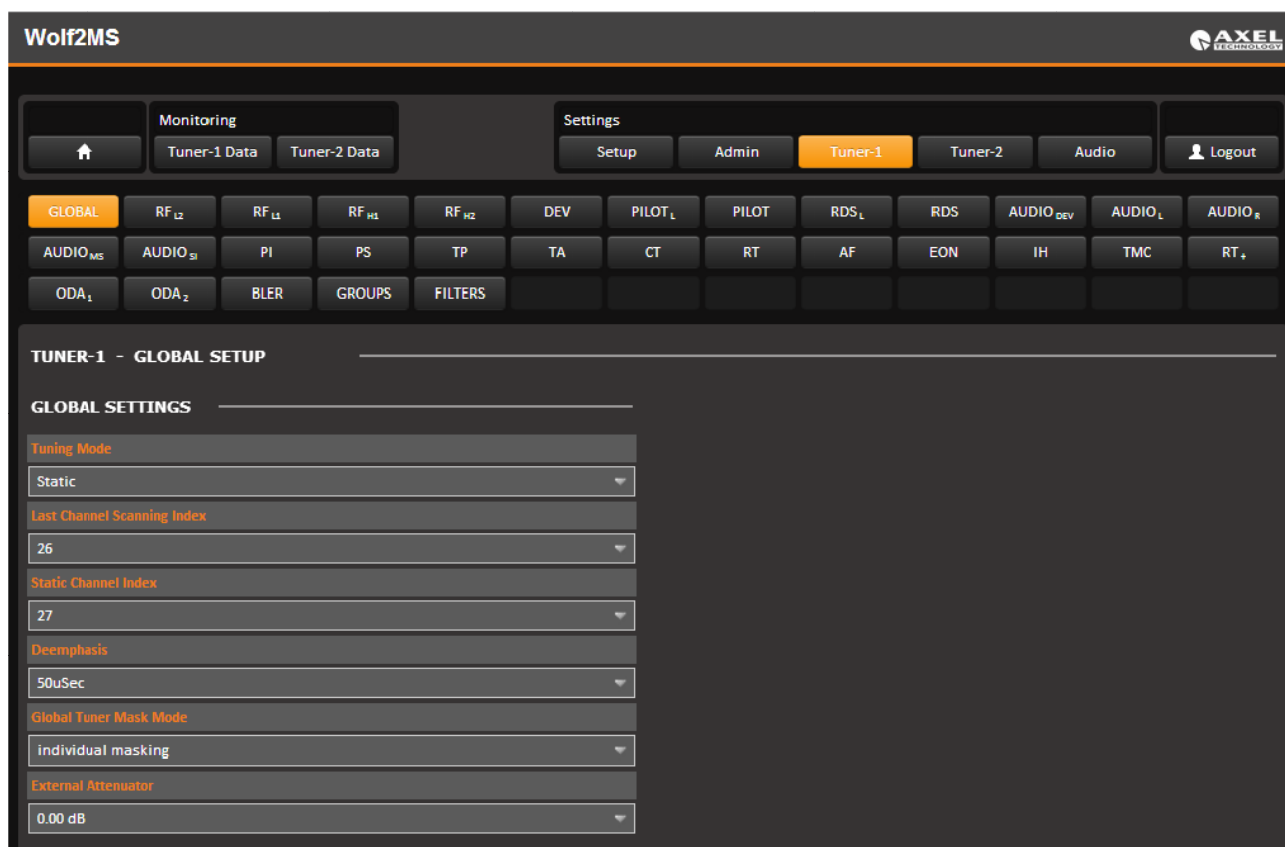

Wolf2MS AXEL TECHNOLOGY

Monitoring: Tuner-1 Data, Tuner-2 Data

Settings: Setup, Admin, **Tuner-1**, Tuner-2, Audio, Logout

GLOBAL RF_L RF_L RF_{H1} RF_{H2} DEV PILOT_L PILOT RDS_L RDS AUDIO_{DEV} AUDIO_L AUDIO_R

AUDIO_{MS} AUDIO_{SI} PI PS TP TA CT RT AF EON IH TMC RT₊

ODA₁ ODA₂ BLER GROUPS FILTERS

TUNER-1 - GLOBAL SETUP

GLOBAL SETTINGS

- Tuning Mode: Static
- Last Channel Scanning Index: 26
- Static Channel Index: 27
- Deemphasis: 50uSec
- Global Tuner Mask Mode: individual masking
- External Attenuator: 0.00 dB

14.6.1 Tuner-1 – Main

In this page it is possible to set the behavior of the Tuner-1 and each single parameter it is reported below:

TUNER-1	
GLOBAL SETTINGS	
Tuning Mode	Static
Last Channel Scanning Index	4
Static Channel Index	1
Deemphasis	50uSec
Global Tuner Mask Mode	individual masking
External Attenuator	0.00 dB

14.6.2 Tuning Mode

By using this parameter it is possible to change the tuning mode that should be **OFF – Static – Scan – Smart Scan**.

OFF	In OFF the tuner is unavailable
STATIC	in Static the tuner remain fixed on a single frequency that is depending by the parameter Static Channel Index
SCAN	In Scan mode the tuner starts to scan the FM band, from channel 1 up to the <Last Channel Scanning Index>
SMART SCAN	In smart mode the channel scan time is adjusted automatically according to instantaneous measurements requirements.

14.6.3 Smart Scan

The smart scan is an scan evolution method and “smart” mode to check each single parameter of the checked frequency: if during a scan, a single parameter of the scanned frequency is out-of-range the Wolf 2MS should decide to remain more time (in seconds) on the checked frequency, in order to get the correct value, or exclude a false-positive alarm.

Practical example: a typical case should be the decoding of the ODA service in RDS, or a PI Code, or any value checked. If the decoding gives an “error” the Wolf 2MS can stay more seconds on this frequency, and wait in order to get the correct value, and don’t generate an error (via snmp trap) that can overload the NMS system. In the real fact the checked valued is correct, but sometimes due to a lot of unpredictable situation, this value should be considered as an error.

14.6.4 **Deemphasis**

The internal tuner-1 Deemphasis value can be set between 50uS or 75uS accordingly to the country/region where the Wolf 2MS has been installed.

14.6.5 **External Attenuator**

In order to provide to Wolf 2MS a correct RF input level, in case an external RF attenuator is required, it is necessary to insert here the same attenuation level introduced by the external RF attenuator.

14.6.6 **Global Tuner Mask Mode**

By using this settings it is possible to set the behavior of the errors, if these should be masked or not.

Masked	Mask all alarms with priority over any individual configuration. Mask an alarm means <i>"NO errors are reported and NO errors are visible on the webpage"</i>
Unmasked	Unmasks all alarms with priority over any individual configuration. Unmask an alarm means that <i>"the alarms are reported and visible on the webpage"</i>
Severity-1	Mask all alarms with severity equal to 1 (The others errors are not masked)
Severity-2	Mask all alarms with severity less than or equal to 2 (The others errors are not masked)
Severity-3	Mask all alarms with severity less than or equal to 3.
Individual Masking	This parameter allows the user to set for each single parameter under control if the parameter must be masked or not.

It is possible to set for each single parameter under control the Masked or unmasked and the Severity Level on these value:

RFL2 – RFL1 / RFH1 – RFH2 – DEV – PILOT Low – PILOT – RDS Low – RDS – AUDIO Dev - AUDIO Left – AUDIO Right –AUDIO Ms - AUDIO Si - PI – PS – TP - TA – CT – RT – AF – EON – IH - TMC – RT+ - ODA1 – ODA2 – BLER in the column **MASK**.



14.6.7 The meaning of “Mask” on each single parameter under control

On each single parameter under control it is also possible to set the if the single parameter can be Masked, unmasked, Severity1 – Severity2 – Severity3 or RFL2. In this case each single parameter follow an Individual Masking.

The severity level is generally assigned in order to have a relation between the parameter under control and the priority. All the parameters involved in Severity1 – Severity2 – Severity3 can be masked or not.

Masked	Alarm IS masked (if <i>Global Tuner Mask Mode</i> is set in individual masking)
Unmasked	Alarm IS NOT masked (if <i>Global Tuner Mask Mode</i> is set in individual masking)
Severity-1	The Alarm is masked only if <i>Global Tuner Mask Mode</i> is set on a Severity < or equal to 1 (it means always not masked)
Severity-2	The Alarm is masked only if <i>Global Tuner Mask Mode</i> is set on a Severity < or equal to 2
Severity-3	The Alarm is masked only if <i>Global Tuner Mask Mode</i> is set on a Severity < or equal to 3 (it means always masked)
RFL2 Mask	Masked if the Alarm RFL2 Mask is active. (see <i>Note2 below</i>)


Note1: it is not possible to mix the (Severity1-Severity2-Severity3) with *Individual Masking*

Note2: in order to work properly the RFL2 Mask requires that validation is less of RFL2 and Hold time is greater than the individual alarms that use this type of mask.

Example 1: Masked, Unmasked and Individual Masking.


This schemes shows from left to right the flow of each single Alarm.

In the first row the example is the PI Code. Once it is reported an error (**PI**) if the Parameter Mask in the single Parameter under control is MASKED but the Global Tuner Mask Mode is INDIVIDUAL MASKING = **NO error report**

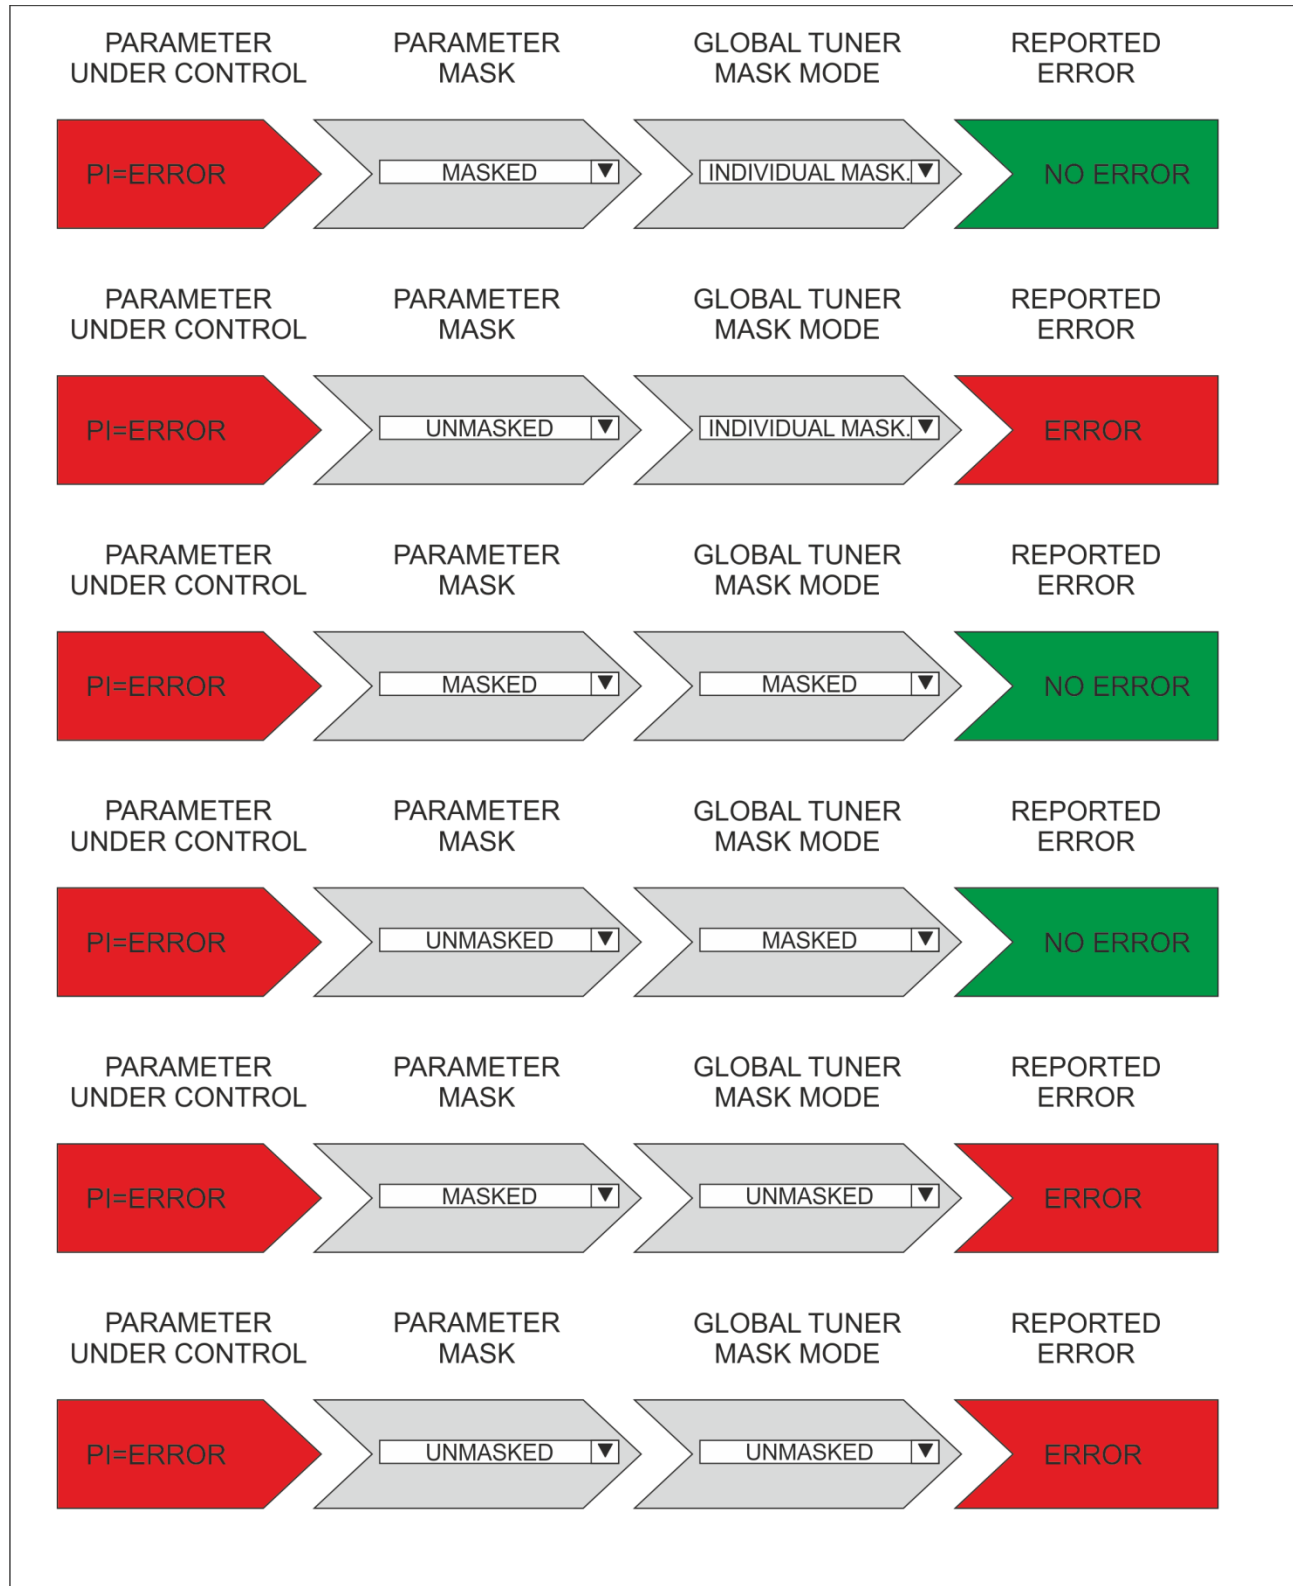


Example 2: Severity-1, Severity-2, Severity3.

This schemes shows from left to right the flow of each single Alarm.

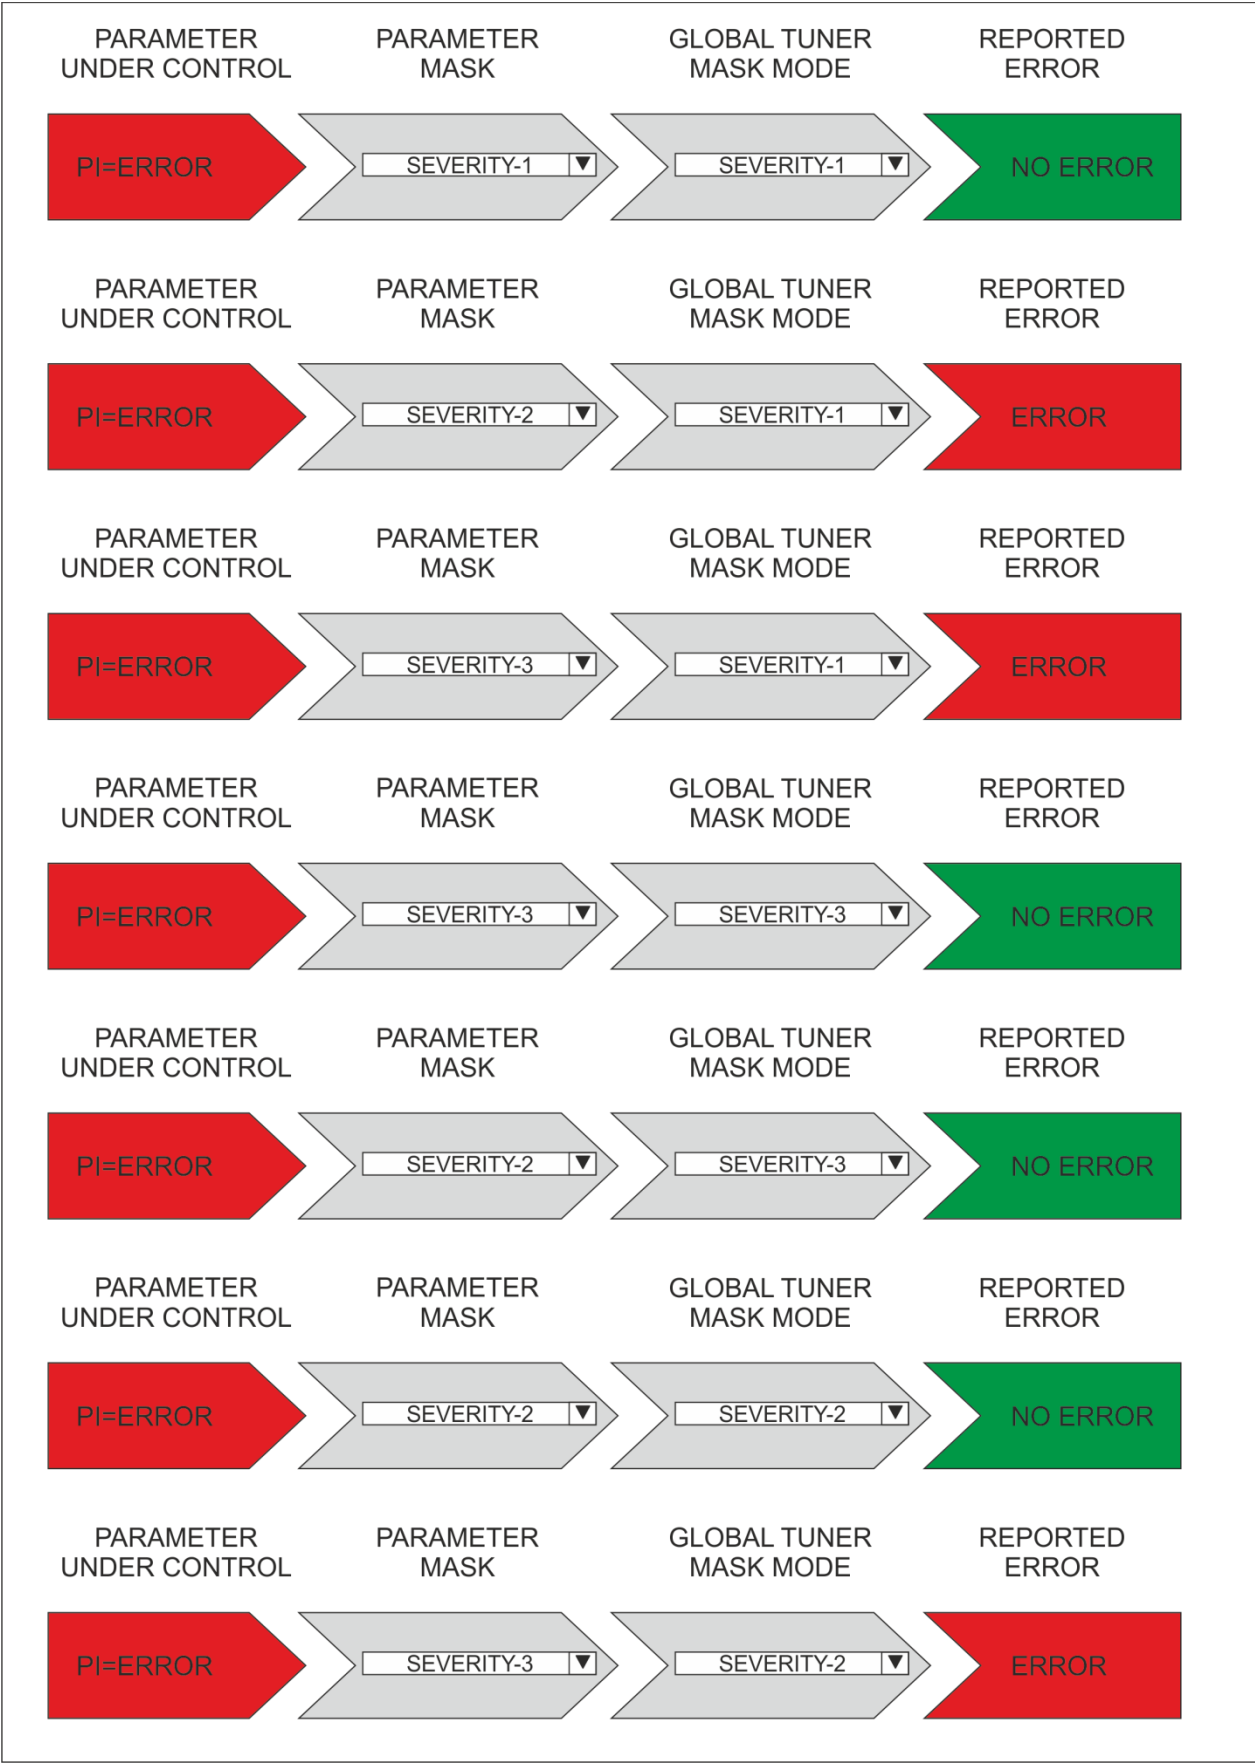

Example 3: RFL2 MASK

This schemes shows from left to right the flow of each single Alarm.

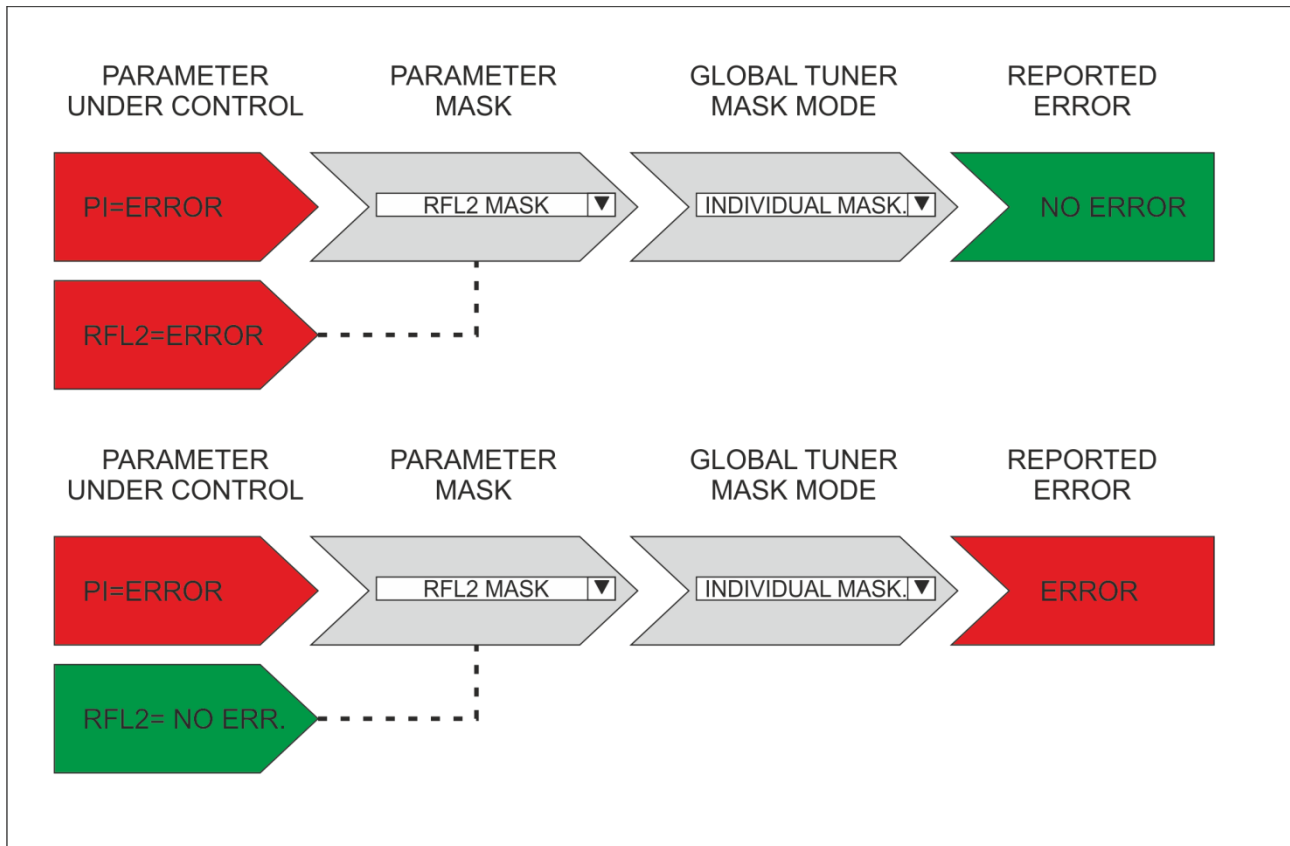


14.6.8 RFL2

This section is about the **Radio Frequency LOWER LEVEL 2**.

TUNER-1 - RADIO FREQUENCY LOW LEVEL 2										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Thr	Hysteresis	Validation	Hold	Mask
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	30.00 dBuV	5.00 dBuV	2 sec	2 sec	masked
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	30.00 dBuV	5.00 dBuV	2 sec	2 sec	masked
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	30.00 dBuV	5.00 dBuV	2 sec	2 sec	masked
4	RMC	89.20 MHz	-----	5 sec	unmasked	30.00 dBuV	5.00 dBuV	2 sec	2 sec	masked

NAME	DESCRIPTION	NOTE
Chan (*)	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used and managed by the Configuration Manager	
Scan Time	This value represents the time in seconds that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Thr or Threshold	Threshold level. Below this threshold level an alarm is generated.	See Note1 reported below
Hysteresis level	This value can be set as range of Hysteresis for the measurement. Hysteresis is the dependence of a system not only on its current environment but also on its past environment.	
Validation	This field contains the time of persistence necessary to the alarm to be considered "validated". For example, if the system launches an alarm, this alarm must remain "up" or "Active" for all the time of "Validation" to be considered a true alarm to avoid the detection of spikes.	
Hold	is the time between the cessation of the alarm condition and alarm signaling finished	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	Scroll Mouse
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	Scroll Mouse
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	Scroll Mouse

Alarm generation RFL2:

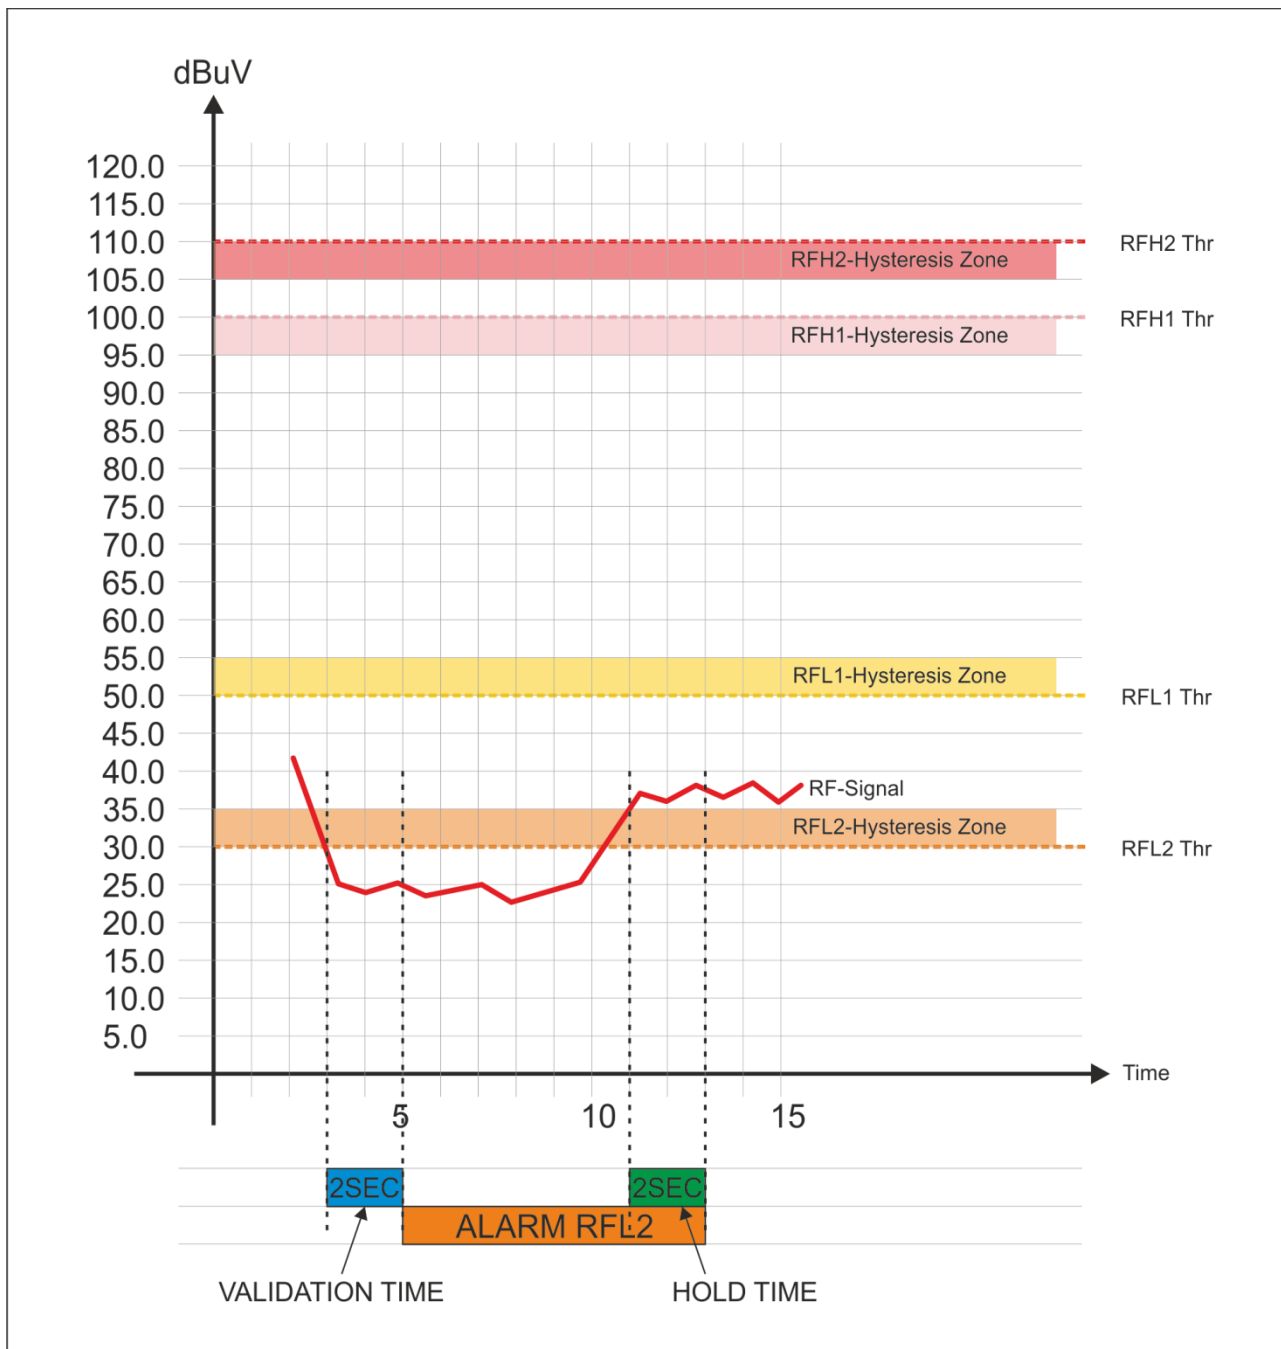

Note1:

Condition	Description
Error Generation	If the RF Signal under control is $< (RFL2\ Thr)$ for a duration $> Validation$ = the error is generated.
Error Come out	If the RF Signal under control $> (RFL2\ Thr + Hysteresis)$ for a duration $> Hold$ = the error come out.

14.6.9 RFL1

This section is about the **Radio Frequency LOWER LEVEL 1**.

TUNER-1 - RADIO FREQUENCY LOW LEVEL 1										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Thr	Hysteresis	Validation	Hold	Mask
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	50.00 dBuV	5.00 dBuV	2 sec	2 sec	masked
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	50.00 dBuV	5.00 dBuV	2 sec	2 sec	masked
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	50.00 dBuV	5.00 dBuV	2 sec	2 sec	masked
4	RMC	89.20 MHz	-----	5 sec	unmasked	50.00 dBuV	5.00 dBuV	2 sec	2 sec	masked

NAME	DESCRIPTION	NOTE
Chan (*)	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used and managed by the Configuration Manager	
Scan Time	This value represents the time in seconds that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Thr or Threshold	Threshold level. Below this threshold level an alarm is generated.	See Note1 reported below
Hysteresis level	This value can be set as range of Hysteresis for the measurement. Hysteresis is the dependence of a system not only on its current environment but also on its past environment.	
Validation	This field contains the time of persistence necessary to the alarm to be considered "validated". For example, if the system launches an alarm, this alarm must remain "up" or "Active" for all the time of "Validation" to be considered a true alarm to avoid the detection of spikes.	
Hold	is the time between the cessation of the alarm condition and alarm signaling finished	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	Scroll Mouse
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	Scroll Mouse
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	Scroll Mouse


14.6.10 **RFH1**

This section is about the **Radio Frequency HIGHER LEVEL 1**.

TUNER-1 - RADIO FREQUENCY HIGH LEVEL 1										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Thr	Hysteresis	Validation	Hold	Mask
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	100.00 dBuV	5.00 dBuV	2 sec	2 sec	masked
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	100.00 dBuV	5.00 dBuV	2 sec	2 sec	masked
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	100.00 dBuV	5.00 dBuV	2 sec	2 sec	masked
4	RMC	89.20 MHz	-----	5 sec	unmasked	100.00 dBuV	5.00 dBuV	2 sec	2 sec	masked

NAME	DESCRIPTION	NOTE
Chan (*)	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used and managed by the Configuration Manager	
Scan Time	This value represents the time in seconds that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Thr or Threshold	Threshold level. Beyond this threshold level an alarm is generated.	See Note1 reported below
Hysteresis level	This value can be set as range of Hysteresis for the measurement. Hysteresis is the dependence of a system not only on its current environment but also on its past environment.	
Validation	This field contains the time of persistence necessary to the alarm to be considered "validated". For example, if the system launches an alarm, this alarm must remain "up" or "Active" for all the time of "Validation" to be considered a true alarm to avoid the detection of spikes.	
Hold	is the time between the cessation of the alarm condition and alarm signaling finished	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

Alarm generation RFH1:

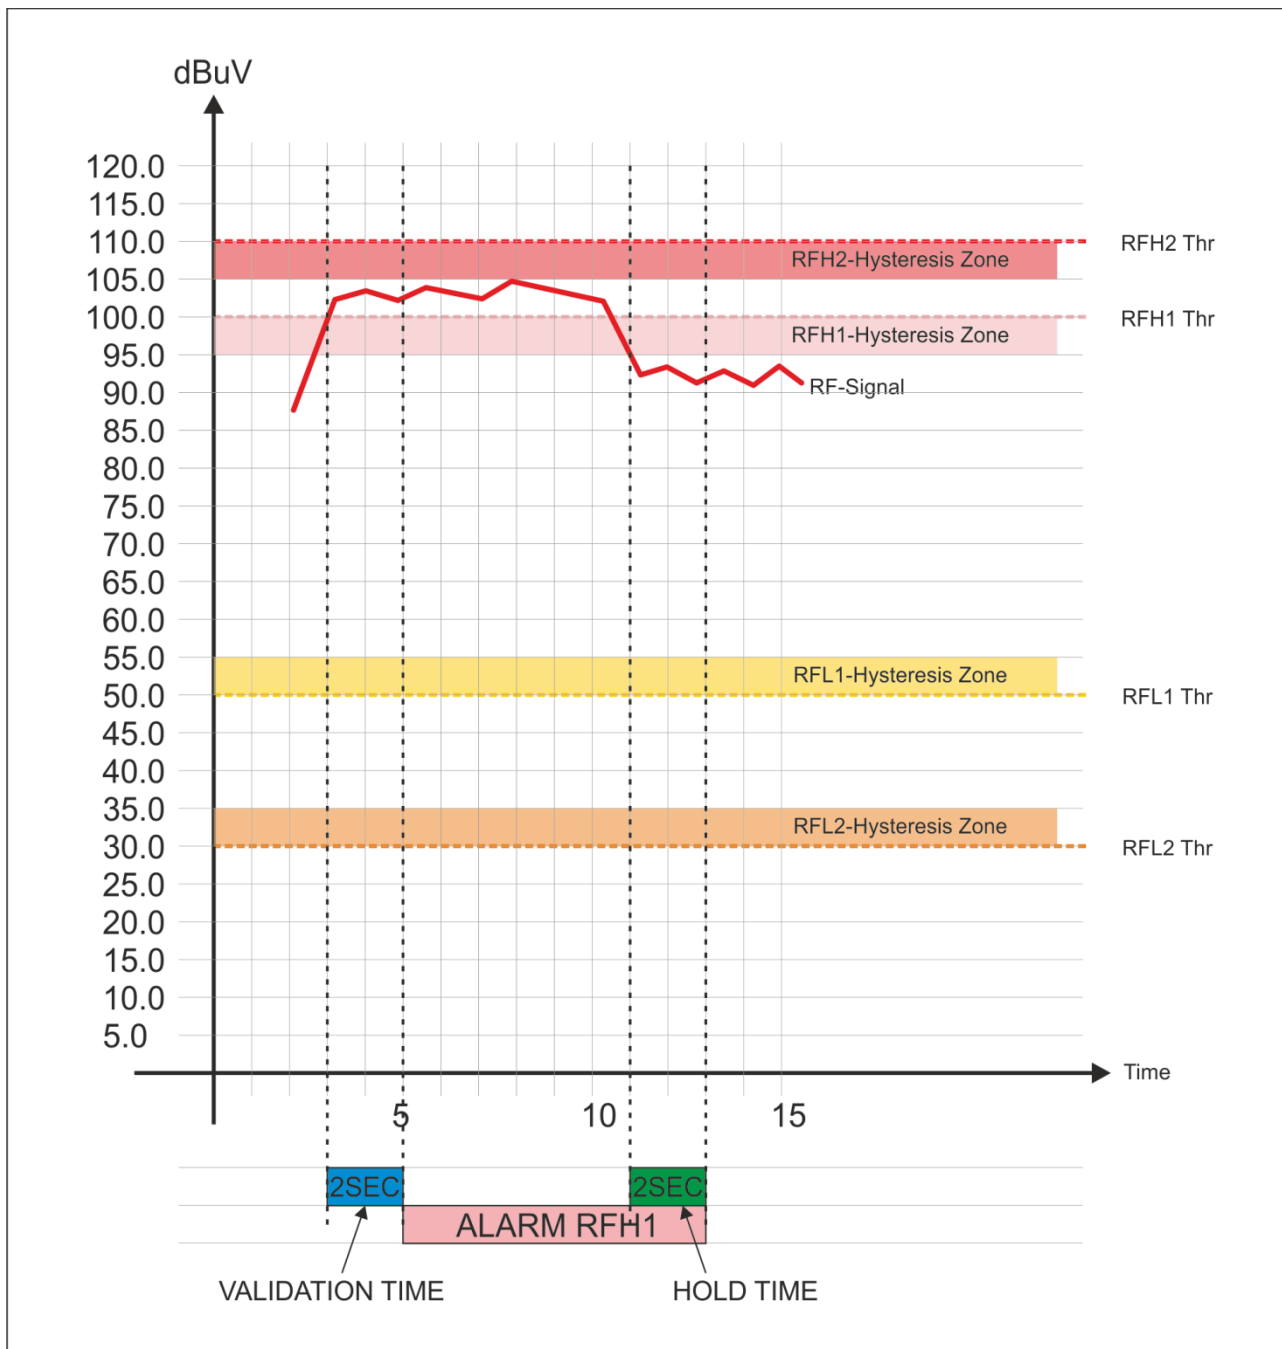

Note1

Condition	Description
Error Generation	If the RF Signal level under control $> (RFH1 + Hysteresis)$ for a duration $> Validation$ = the error is generated
Error Come out	If the RF Signal level under control $< (RFH1 - Hysteresis)$ for a duration $> Hold$ = the error come out


14.6.11 **RFH2**

This section is about the **Radio Frequency HIGHER LEVEL 2**.

TUNER-1 - RADIO FREQUENCY HIGH LEVEL 2										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Thr	Hysteresis	Validation	Hold	Mask
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	110.00 dBuV	5.00 dBuV	2 sec	2 sec	masked
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	110.00 dBuV	5.00 dBuV	2 sec	2 sec	masked
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	110.00 dBuV	5.00 dBuV	2 sec	2 sec	masked
4	RMC	89.20 MHz	-----	5 sec	unmasked	110.00 dBuV	5.00 dBuV	2 sec	2 sec	masked

NAME	DESCRIPTION	NOTE
Chan (*)	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used and managed by the Configuration Manager	
Scan Time	This value represents the time in seconds that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Thr or Threshold	Threshold level. Beyond this threshold level an alarm is generated.	See Note1 reported below
Hysteresis level	This value can be set as range of Hysteresis for the measurement. Hysteresis is the dependence of a system not only on its current environment but also on its past environment.	
Validation	This field contains the time of persistence necessary to the alarm to be considered "validated". For example, if the system launches an alarm, this alarm must remain "up" or "Active" for all the time of "Validation" to be considered a true alarm to avoid the detection of spikes.	
Hold	is the time between the cessation of the alarm condition and alarm signaling finishe	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

Alarm generation RFH2

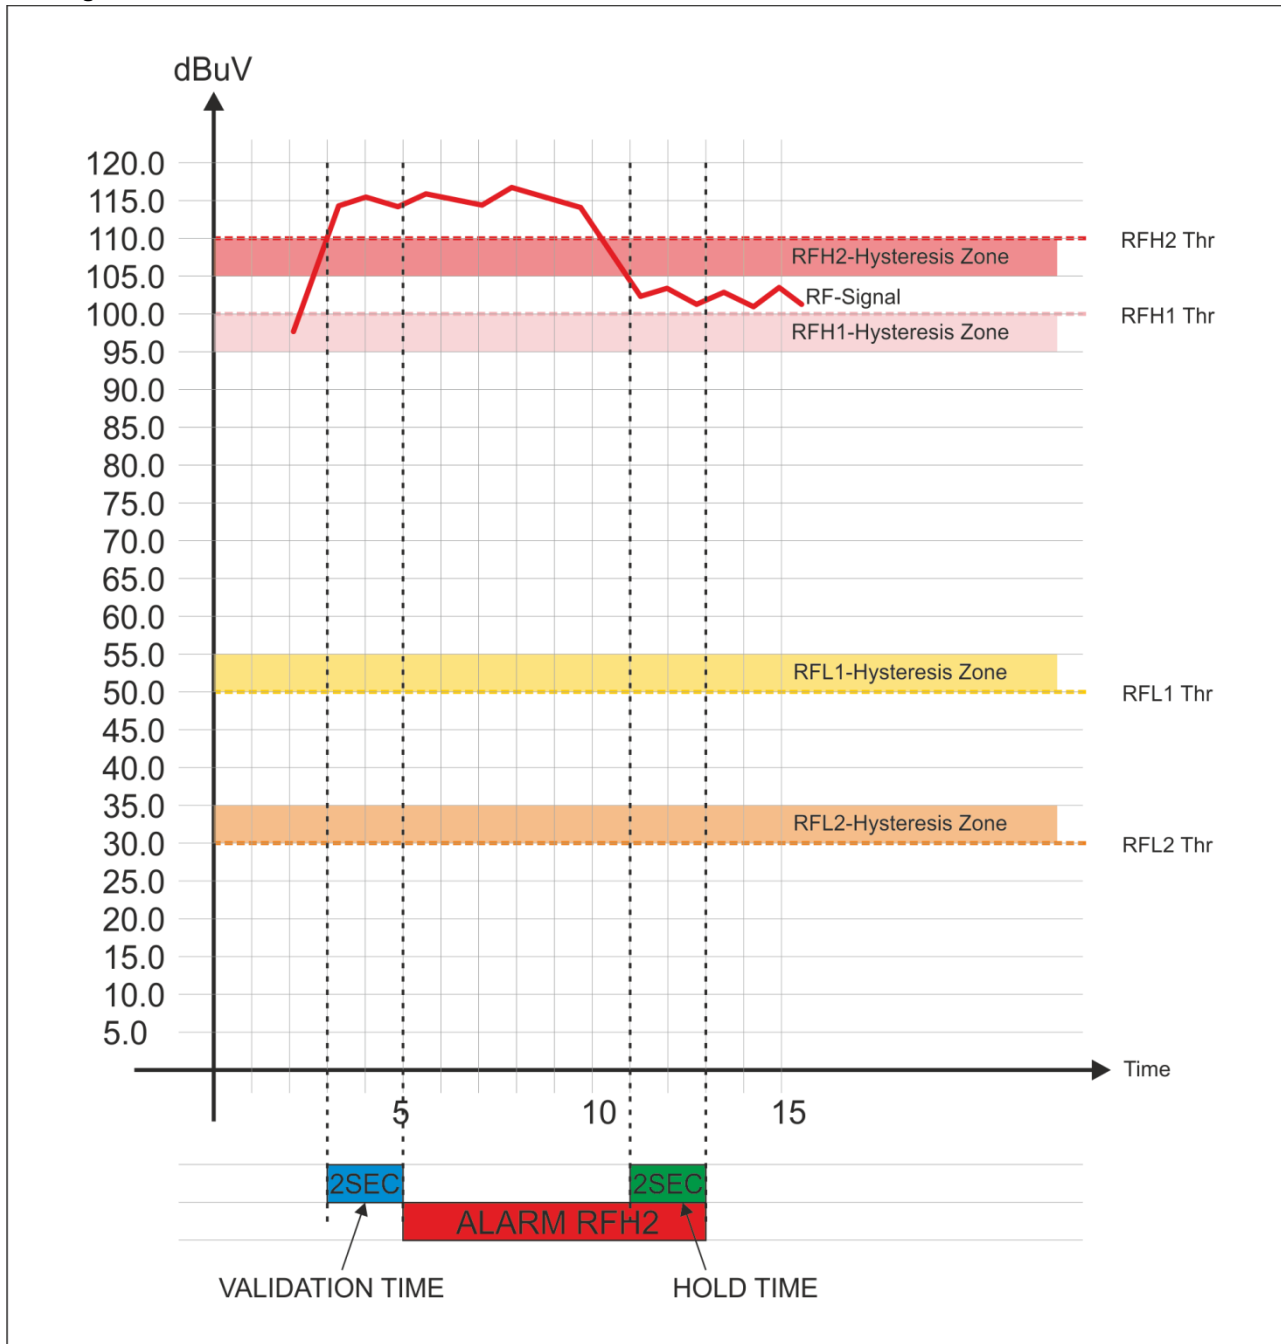

Note1

Condition	Description
Error Generation	If the RF Signal level under control $> (RFH2 + Hysteresis)$ for a duration $> Validation$ = the error is generated
Error Come out	If the RF Signal level under control $< (RFH2 Thr - Hysteresis)$ for a duration $> Hold$ = the error come out


14.6.12 **DEV (Maximum Deviation allowed)**

This page allows the user to set mainly the maximum threshold level for the Deviation, for each single Channel / Frequency.

TUNER-1 - FREQUENCY DEVIATION										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Max. Thr	Hysteresis	Validation	Hold	Mask
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	80.00 kHz	5.00 kHz	2 sec	2 sec	masked
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	80.00 kHz	5.00 kHz	2 sec	2 sec	masked
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	80.00 kHz	5.00 kHz	2 sec	2 sec	masked
4	RMC	89.30 MHz	-----	5 sec	unmasked	80.00 kHz	5.00 kHz	2 sec	2 sec	masked

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	this value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Max Thr	Maximum Threshold level. The value set here is the maximum deviation that the RF carrier can reach. By default the level is 80kHz. With a double click on the box can be changed by inserting the desired value.	See Note1 reported below
Hysteresis	This value can be set as range of Hysteresis for the measurement. Hysteresis is the dependence of a system not only on its current environment but also on its past environment.	
Validation	This field contains the time of persistence necessary to the alarm to be considered "validated". For example, if the system launches an alarm, this alarm must remain "up" or "Active" for all the time of "Validation" to be considered a true alarm to avoid the detection of spikes.	
HOLD	is the time between the cessation of the alarm condition and alarm signaling finished	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

Alarm generation DEV – Deviation

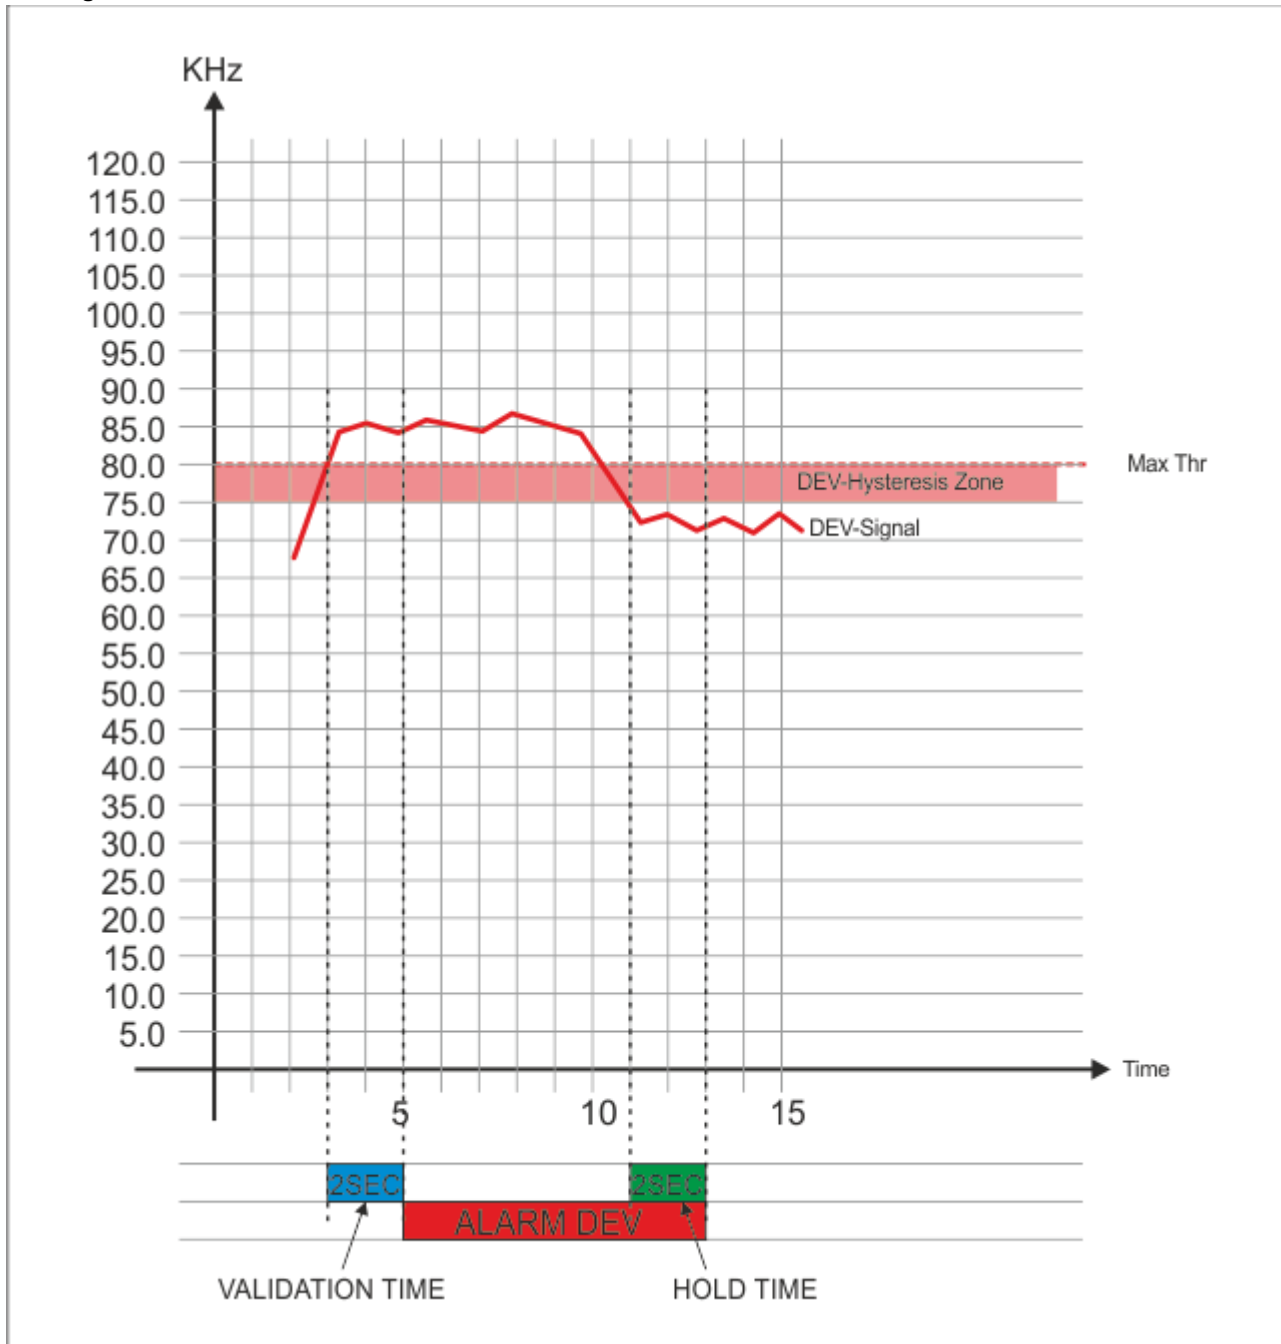

Note1

Condition	Description
Error Generation	If the RF Signal level under control $> (DEV)$ for a duration $> Validation$ = the error is generated
Error Come out	If the RF Signal level under control $< (DEV - Hysteresis)$ for a duration $> Hold$ = the error come out

14.6.13 PILOT LOW (19kHz Pilot Stereo level)

This page allows the user to set **ONLY** the **minimum threshold level** for the Stereo Pilot, for each single Channel / Frequency. This status variable allows to monitor if the pilot level goes down a given threshold level.

TUNER-1 - PILOT LOW LEVEL										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Thr	Hysteresis	Validation	Hold	Mask
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	5.00 kHz	0.50 kHz	2 sec	2 sec	masked
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	5.00 kHz	0.50 kHz	2 sec	2 sec	masked
3	Radio deeJay	88.70 MHz	-----	5 sec	unmasked	5.00 kHz	0.50 kHz	2 sec	2 sec	masked
4	RMC	89.20 MHz	-----	5 sec	unmasked	5.00 kHz	0.50 kHz	2 sec	2 sec	masked

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Thr	Minimum Threshold level for the Pilot Stereo 19kHz. The value set here is the minimum deviation level that the Pilot Stereo 19kHz carrier can reach. By default the level is 5kHz. With a double click on the box can be changed by inserting the desired value.	
Hysteresis level	this value can be set as range of Hysteresis for the measurement. Hysteresis is the dependence of a system not only on its current environment but also on its past environment.	
Validation	This field contains the time of persistence necessary to the alarm to be considered "validated". For example, if the system launches an alarm, this alarm must remain "up" or "Active" for all the time of "Validation" to be considered a true alarm to avoid the detection of spikes.	
Hold	It is the time between the cessation of the alarm condition and alarm signaling finished	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	


14.6.14 **PILOT (19kHz Pilot Stereo level)**

This page allows the user to set mainly **the minimum and the maximum threshold** level for the Stereo Pilot, for each single Channel / Frequency. With this alarm status variable (using a window zone) it is possible to monitor the pilot level inside a nominal window zone and if it falls under a minimum level or monitor two low levels zones like RF levels.

TUNER-1 - PILOT OPERATIVE WINDOW ZONE										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Min. Thr	Max. Thr	Hysteresis	Validation	Hold
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	5.00 kHz	8.00 kHz	0.50 kHz	2 sec	2 sec
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	5.00 kHz	8.00 kHz	0.50 kHz	2 sec	2 sec
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	5.00 kHz	8.00 kHz	0.50 kHz	2 sec	2 sec
4	RMC	89.20 MHz	-----	5 sec	unmasked	5.00 kHz	8.00 kHz	0.50 kHz	2 sec	2 sec


NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Min. Thr	Minimum Threshold level for the Pilot Stereo 19kHz. The value set here is the minimum deviation level that the Pilot Stereo 19kHz carrier can reach. By default the level is 5kHz. With a double click on the box can be changed by inserting the desired value.	See Note1 reported below
Max. Thr	Maximum Threshold level for the Pilot Stereo 19kHz. The value set here is the maximum deviation level that the Pilot Stereo 19kHz carrier can reach. By default the level is 8kHz. With a double click on the box can be changed by inserting the desired value.	See Note2 reported below
Hysteresis level	this value can be set as range of Hysteresis for the measurement. Hysteresis is the dependence of a system not only on its current environment but also on its past environment.	
Validation	This field contains the time of persistence necessary to the alarm to be considered "validated". For example, if the system launches an alarm, this alarm must remain "up" or "Active" for all the time of "Validation" to be considered a true alarm to avoid the detection of spikes.	
Hold	It is the time between the cessation of the alarm condition and alarm signaling finished	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	

Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

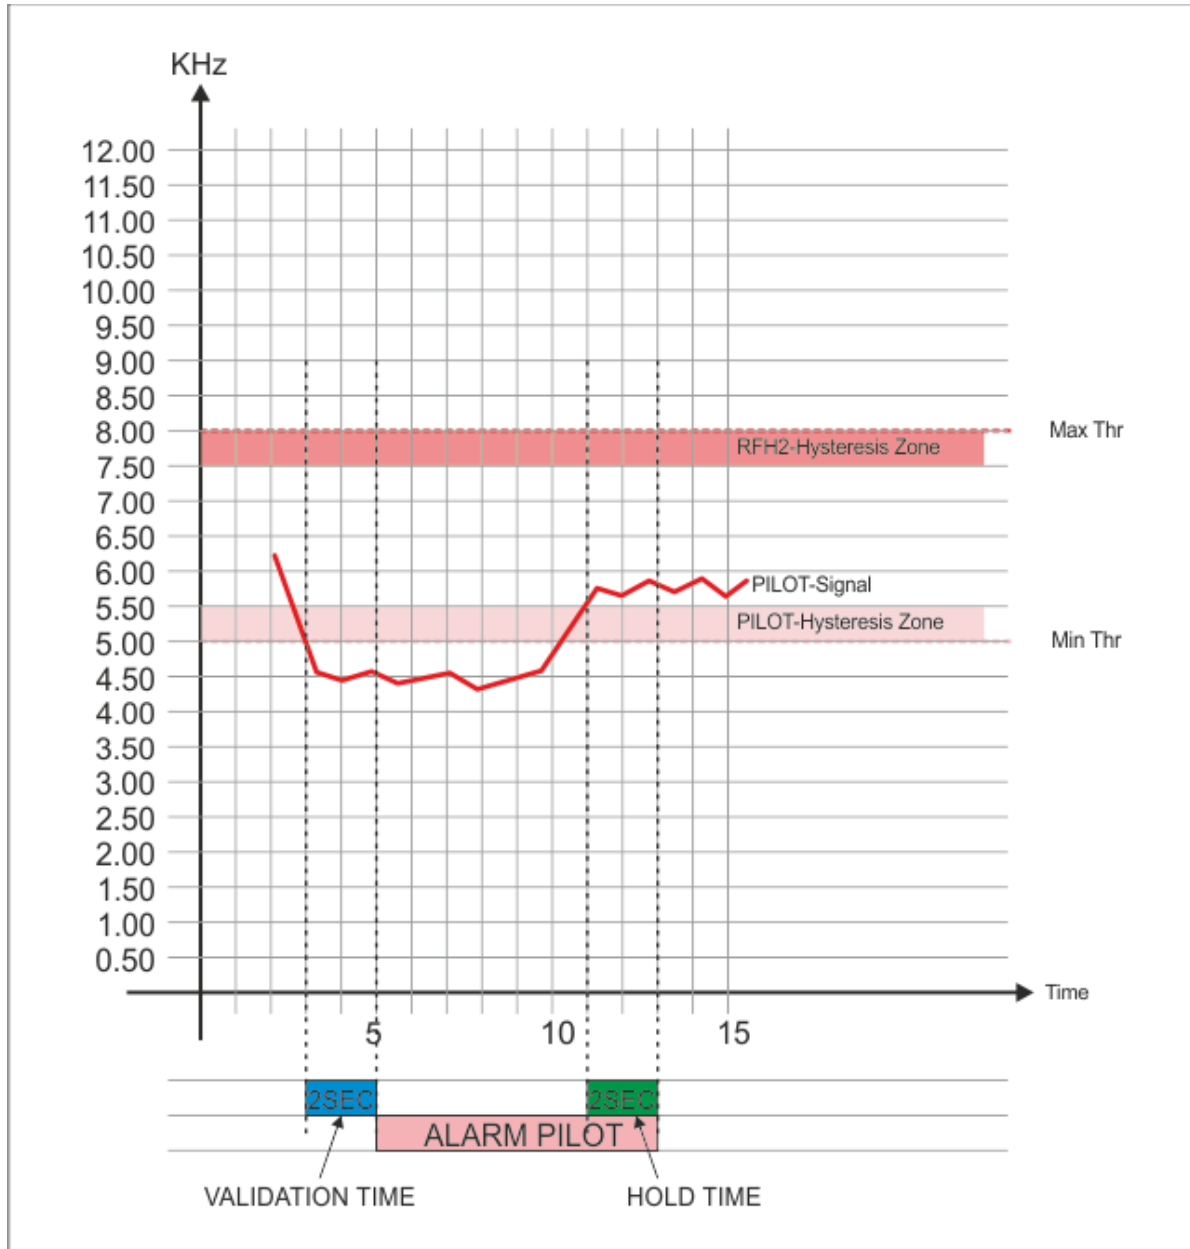

Note1

Condition	Description
Error Generation Min. Threshold	If the RF Signal level under control < (Min. Thr) for a duration > Validation = the error is generated
Error Come out Min. Threshold	If the RF Signal level under control > (Min. Thr + Hysteresis) for a duration > Hold = the error come out

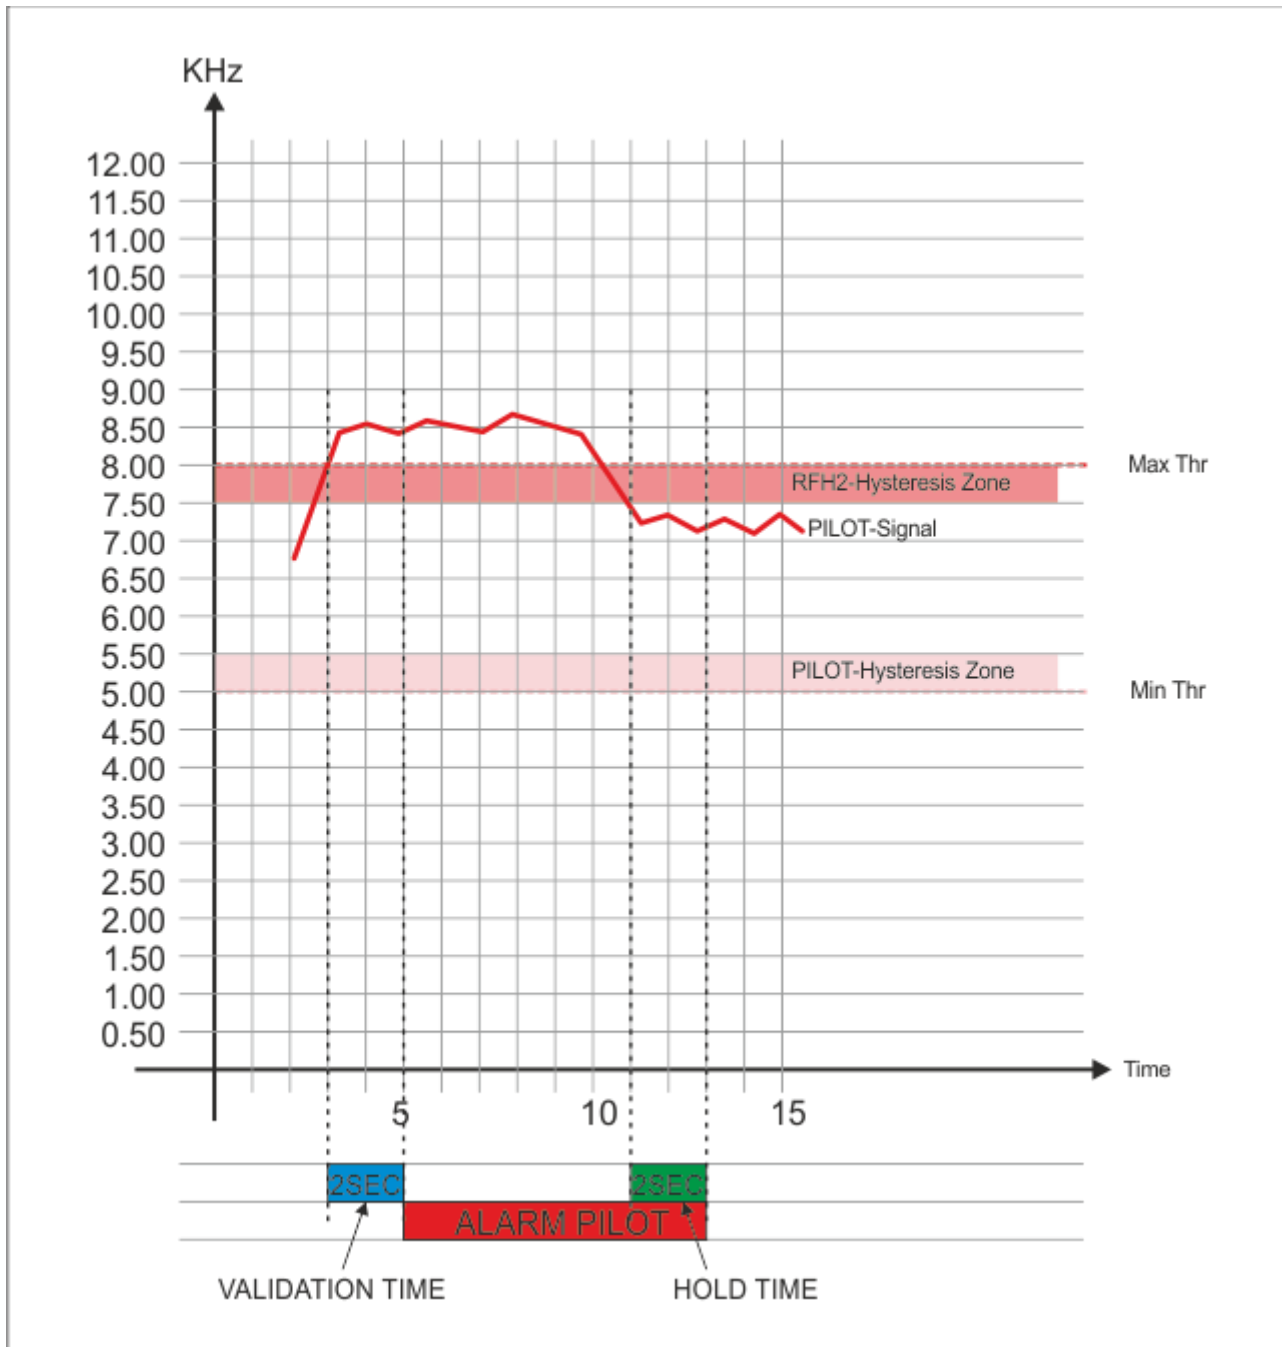

Note2

Condition	Description
Error Generation Max. Threshold	If the RF Signal level under control > (Max. Thr) for a duration > Validation = the error is generated
Error Come out Max. Threshold	If the RF Signal level under control > (Max. Thr - Hysteresis) for a duration > Hold = the error come out

14.6.15 **RDS Low (57kHz RDS Data Level)**

This page allows the user to set ONLY the minimum threshold level for the RDS Data Level, for each single Channel / Frequency. This settings mainly means that below this level an error is generated and some receivers may not correctly decode the RDS data stream

TUNER-1 - RDS LOW LEVEL										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Thr	Hysteresis	Validation	Hold	Mask
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	1.80 kHz	0.20 kHz	2 sec	2 sec	masked
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	1.80 kHz	0.20 kHz	2 sec	2 sec	masked
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	1.80 kHz	0.20 kHz	2 sec	2 sec	masked
4	RMC	89.20 MHz	-----	5 sec	unmasked	1.80 kHz	0.20 kHz	2 sec	2 sec	masked

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Thr	Minimum Threshold level for the RDS Data 57kHz. The value set here is the minimum deviation level that the RDS Data 57kHz carrier can reach. By default the level is 1.80kHz. With a double click on the box can be changed by inserting the desired value.	
Hysteresis level	This value can be set as range of Hysteresis for the measurement. Hysteresis is the dependence of a system not only on its current environment but also on its past environment.	
Validation	This field contains the time of persistence necessary to the alarm to be considered "validated". For example, if the system launches an alarm, this alarm must remain "up" or "Active" for all the time of "Validation" to be considered a true alarm to avoid the detection of spikes.	
Hold	is the time between the cessation of the alarm condition and alarm signaling finished	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	


14.6.16 **RDS (57kHz RDS Data Level)**

This page allows the user to set mainly the minimum and the maximum threshold level for the RDS Data Level, for each single Channel / Frequency. In this settings it is possible to set normal window working level for the RDS data.

TUNER-1 - RDS OPERATIVE WINDOW ZONE										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Min. Thr	Max. Thr	Hysteresis	Validation	Hold
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	1.80 kHz	4.00 kHz	0.50 kHz	2 sec	2 sec
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	1.80 kHz	4.00 kHz	0.50 kHz	2 sec	2 sec
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	1.80 kHz	4.00 kHz	0.50 kHz	2 sec	2 sec
4	RMC	89.30 MHz	-----	5 sec	unmasked	1.80 kHz	4.00 kHz	0.50 kHz	2 sec	2 sec


NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name Mnemonic that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Min. Thr	Minimum Threshold level for the RDS Data 57kHz. The value set here is the minimum deviation level that the RDS Data 57kHz carrier can reach. By default the level is 1.80kHz. With a double click on the box can be changed by inserting the desired value.	See Note1 reported below
Max. Thr	Maximum Threshold level for the RDS Data 57kHz. The value set here is the maximum deviation level that the RDS Data 57kHz carrier can reach. By default the level is 4.0kHz. With a double click on the box can be changed by inserting the desired value.	See Note2 reported below
Hysteresis level	This value can be set as range of Hysteresis for the measurement. Hysteresis is the dependence of a system not only on its current environment but also on its past environment.	
Validation	This field contains the time of persistence necessary to the alarm to be considered "validated". For example, if the system launches an alarm, this alarm must remain "up" or "Active" for all the time of "Validation" to be considered a true alarm to avoid the detection of spikes.	
Hold	is the time between the cessation of the alarm condition and alarm signaling finished	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>.	

	If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

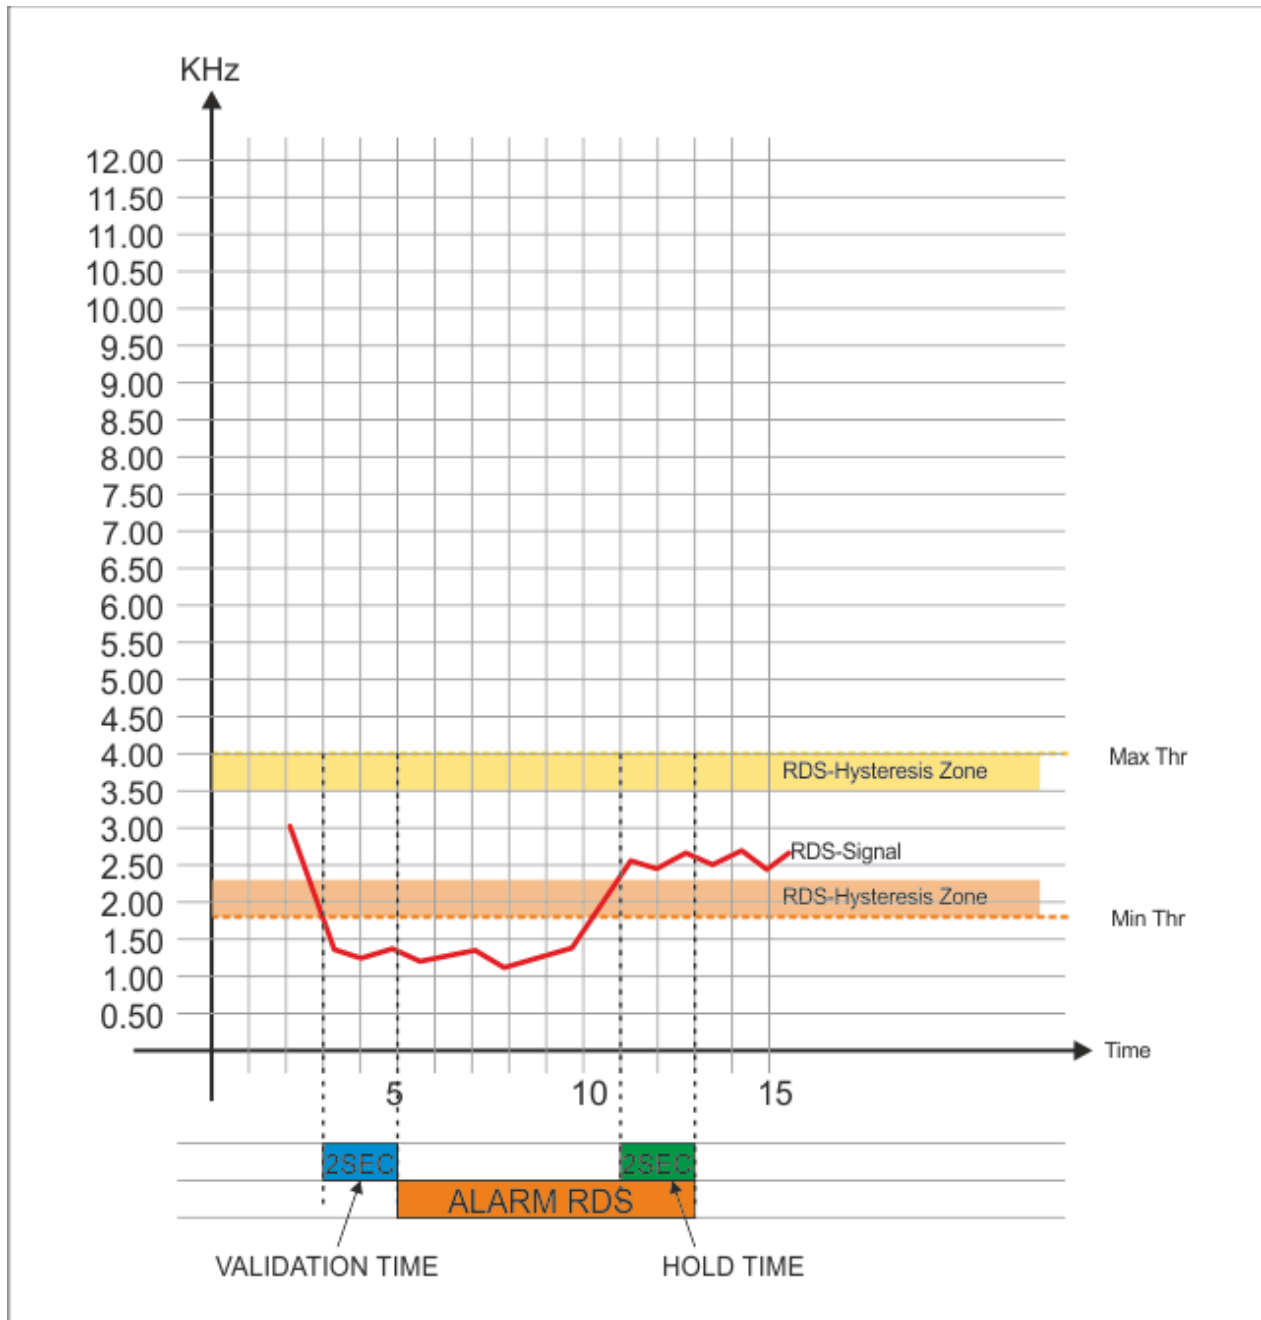

Note1

Condition	Description
Error Generation Min. Threshold	If the RF Signal level under control < (Min. Thr) for a duration > Validation = the error is generated
Error Come out Min. Threshold	If the RF Signal level under control > (Min. Thr + Hysteresis) for a duration > Hold = the error come out

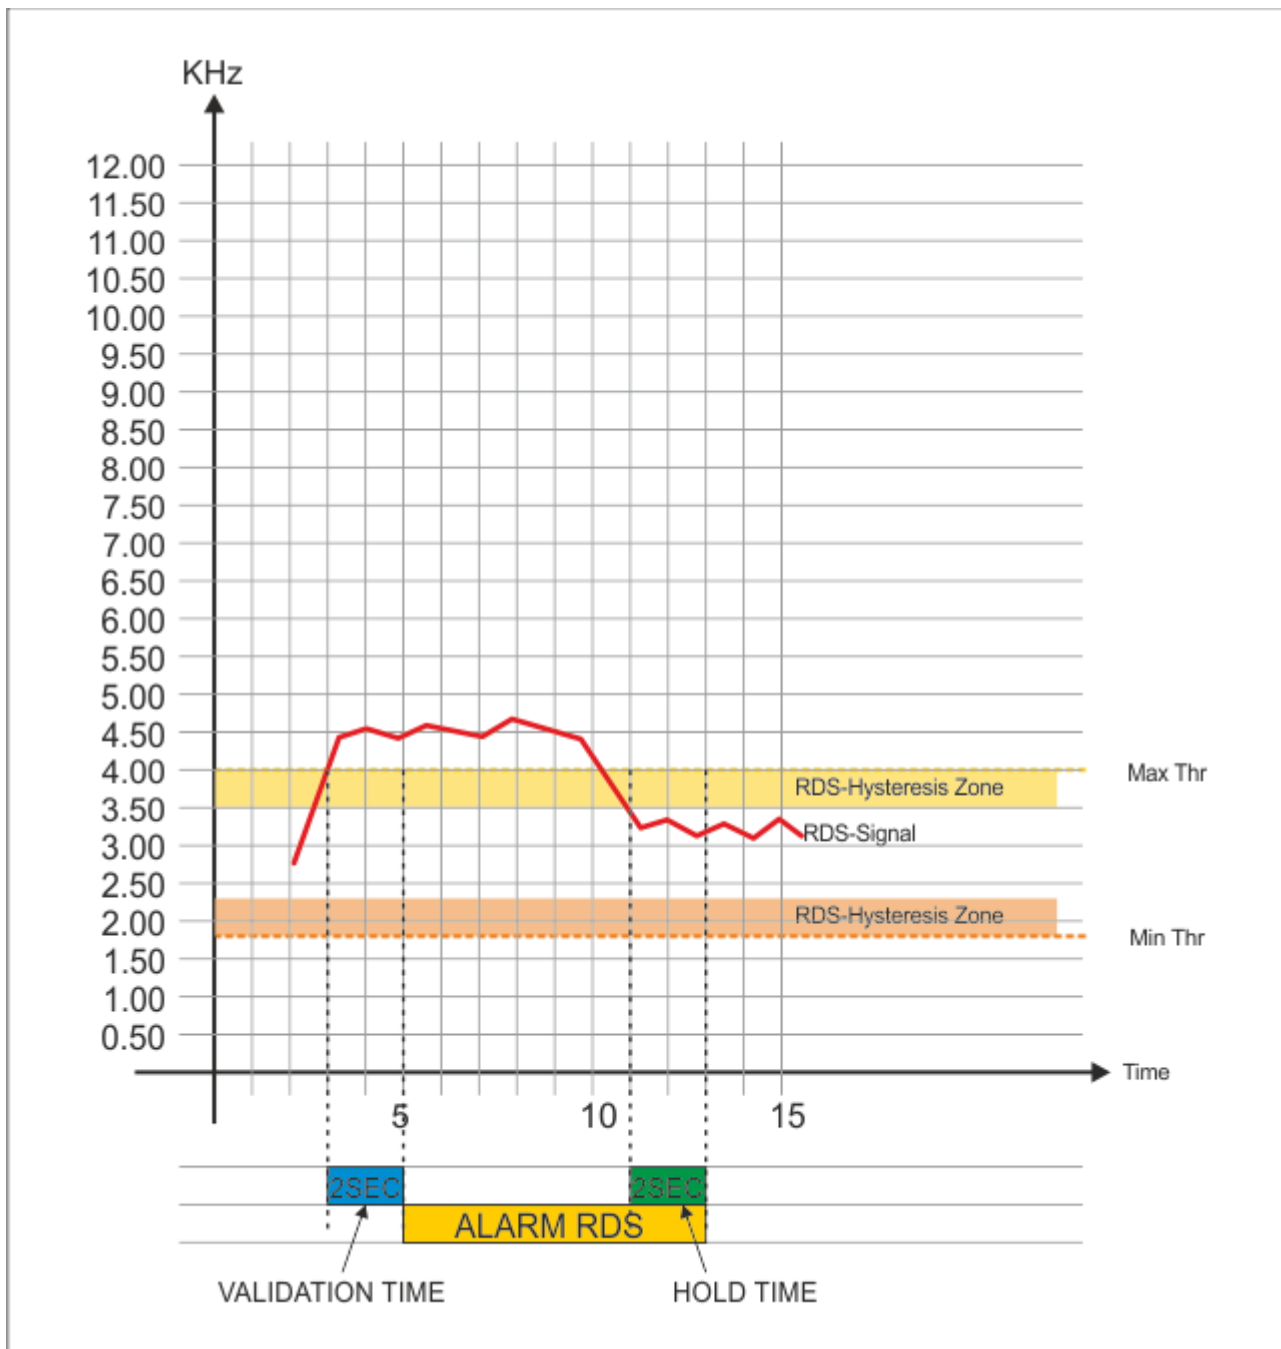

Note2


Condition	Description
Error Generation Max. Threshold	If the RF Signal level under control $> (Max. Thr)$ for a duration $> Validation$ = the error is generated
Error Come out Max. Threshold	If the RF Signal level under control $> (Max. Thr - Hysteresis)$ for a duration $> Hold$ = the error come out

14.6.17 **Audio DEV (Silence detector)**

This page allows the user to set mainly the silence threshold and timing, for each single Channel / Frequency.

TUNER-1 - AUDIO MPX DEVIATION										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Silence Thr	Silence Time	Silence Hold	Silence Mask	Silence Email
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	-20.00 dBr	20 sec	2 sec	masked	disable
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	-20.00 dBr	20 sec	2 sec	masked	disable
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	-20.00 dBr	20 sec	2 sec	masked	disable
4	RMC	89.20 MHz	-----	5 sec	unmasked	-20.00 dBr	20 sec	2 sec	masked	disable

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Silence Thr	This is the minimum level to be considered <i>audio</i> . Under this threshold the audio is considered "silence".	See Note1 reported below
Silence Time	This parameter is related to Silence Thr, after this <Silence Time> the incoming audio is considered "Silence"	
Silence Hold	is the time between the cessation of the alarm condition and alarm signaling finished	
Silence Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Silence Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Silence Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Silence Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

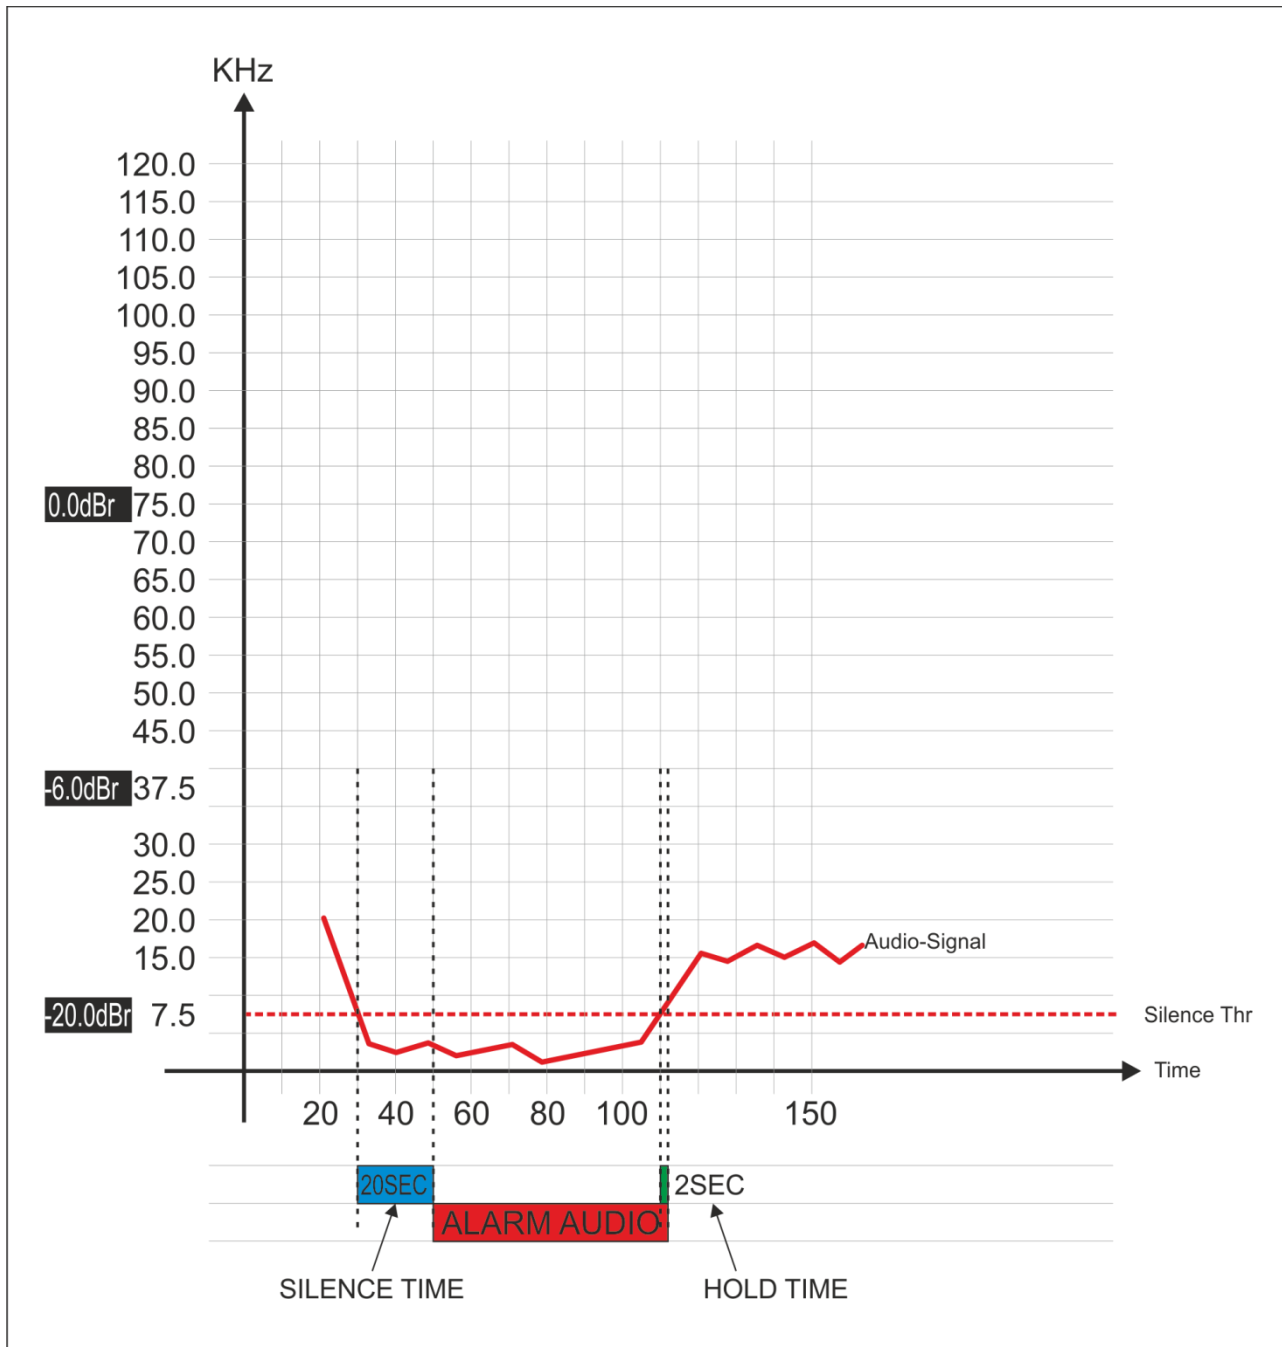

Note1

Condition	Description
Error Generation Silence	If the RF Signal level under control < (Silence Thr) for a duration > Silence Time = the error is generated
Error Come out Silence	If the RF Signal level under control > (Silence Thr) for a duration > Silence Hold = the error come out

14.6.18 **Audio Left (Silence detector)**

This page allows the user to set mainly the silence threshold and timing, for the single Left Channel

TUNER-1 - AUDIO LEFT LEVEL										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Silence Thr	Silence Time	Silence Hold	Silence Mask	Silence Email
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	-20.00 dBr	20 sec	2 sec	masked	disable
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	-20.00 dBr	20 sec	2 sec	masked	disable
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	-20.00 dBr	20 sec	2 sec	masked	disable
4	RMC	89.20 MHz	-----	5 sec	unmasked	-20.00 dBr	20 sec	2 sec	masked	disable

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Silence Thr	This is the minimum level on the LEFT CHANNEL to be considered <i>audio</i> . Under this threshold the audio is considered "silence".	
Silence Time	This parameter is related to Silence Thr, after this <Silence Time> the incoming audio is considered "Silence"	
Silence Hold	is the time between the cessation of the alarm condition and alarm signaling finished	
Silence Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Silence Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Silence Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Silence Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

14.6.19 **Audio Right (Silence detector)**

This page allows the user to set mainly the silence threshold and timing, for the single Right Channel

TUNER-1 - AUDIO RIGHT LEVEL										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Silence Thr	Silence Time	Silence Hold	Silence Mask	Silence Email
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	-20.00 dBr	20 sec	2 sec	masked	disable
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	-20.00 dBr	20 sec	2 sec	masked	disable
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	-20.00 dBr	20 sec	2 sec	masked	disable
4	RMC	89.20 MHz	-----	5 sec	unmasked	-20.00 dBr	20 sec	2 sec	masked	disable

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Silence Thr	This is the minimum level on the RIGHT CHANNEL to be considered <i>audio</i> . Under this threshold the audio is considered "silence".	
Silence Time	This parameter is related to Silence Thr, after this <Silence Time> the incoming audio is considered "Silence"	
Silence Hold	is the time between the cessation of the alarm condition and alarm signaling finished	
Silence Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Silence Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Silence Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Silence Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

14.6.20 **Audio MS (Mono Silence)**

This page allows the user to set mainly the silence threshold and timing, for Audio Mono inside MPX Signal. Mono Silence alarm and about 16 new Oids in the Audio Module branches and two new traps. This new alarm rises up when the audio levels $(LeftRms+RightRms)/2$ is under the threshold for a time greater than the silence time. The threshold range is down to -60dBr. The measurement value is available with all input sources, but the alarms and traps are available for the Tun1 e Tun2 sources only. MIB L4-0 is required

TUNER-1 - AUDIO MONO SILENCE										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Thr	Validation	Hold	Mask	Email
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	-20.00 dBr	20 sec	10 sec	masked	disable
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	-20.00 dBr	20 sec	10 sec	masked	disable
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	-20.00 dBr	20 sec	10 sec	masked	disable
4	RMC	89.20 MHz	-----	5 sec	unmasked	-20.00 dBr	20 sec	10 sec	masked	disable

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	
Thr	This is the minimum level to be considered <i>audio</i> . Under this threshold the audio is considered "silence".	
Time	This parameter is related to Silence Thr, after this <Validation> the incoming audio is considered "Silence"	
Hold	is the time between the cessation of the alarm condition and alarm signaling finished	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

14.6.21 **Audio SI (Stereo Imbalance)**

This page allows the user to set mainly the audio imbalance between channel Left and Channel Right threshold and timing, for Stereo Signal. Stereo Imbalance alarm and about 18 new Oids in the Audio Module branches and two new traps. This new alarm rises up when the audio levels if the unbalance “abs(RmsLeft-RmsRight)” averaged in the “AVG” time is greater than the threshold value more than validation time. The AVG is calculated using a single pole IIR filter with the constant time equal to the AVG time. That means that the AVG time is the time required to reach about the 70% of the final value. The measurement value is available with all input sources, but the alarms and traps are available for the Tun1 e Tun2 sources only. MIB L4-0 is required.

TUNER-1 - AUDIO STEREO IMBALANCE										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Avg	Thr	Validation	Hold	Mask
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	20 sec	10.00 dB	20 sec	10 sec	masked
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	20 sec	10.00 dB	20 sec	10 sec	masked
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	20 sec	10.00 dB	20 sec	10 sec	masked
4	RMC	89.20 MHz	-----	5 sec	unmasked	20 sec	10.00 dB	20 sec	10 sec	masked

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	
Avg	This is the Average time considered for the Threshold and generate an alarm in case of Stereo Audio Imbalancement	
Validation	This parameter is related to Avg, after this <Validation> the incoming audio is considered “Imbalanced” and an alarm will be delibered	
Hold	is the time between the cessation of the alarm condition and alarm signaling finished	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

14.6.22 **RDS PI (Program Identifier)**

It is possible to specify up to 3 PI reference (as a 4 digit hexadecimal value). If received PI doesn't match with anyone of this there is an alarm condition. It is possible to replace any of the four digits of PI fields with a wildcard (represented with an asterisk *).

TUNER-1 - RDS PROGRAM IDENTIFICATION										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Ref 1	Ref 2	Ref 3	Validation	Hold
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	5000	5000	5000	10 sec	10 sec
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	5000	5000	5000	10 sec	10 sec
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	5214	5000	5000	10 sec	10 sec
4	RMC	89.20 MHz	-----	5 sec	unmasked	5000	5000	5000	10 sec	10 sec

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Ref 1	PI Code Reference Number -1	See Note reported below
Ref 2	PI Code Reference Number -2	See Note reported below
Ref 3	PI Code Reference Number -3	See Note reported below
Validation	This field contains the time of persistence necessary to the alarm to be considered "validated". For example, if the system launches an alarm, this alarm must remain "up" or "Active" for all the time of "Validation" to be considered a true alarm to avoid the detection of spikes.	
Hold	is the time between the cessation of the alarm condition and alarm signaling finished	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	

Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	
--------------	--	--

Note1

There is no control check on input field. Please pay attention to the correct typing.
So, for example, a PI Ref. 5*00 will match with 5000, 5100, 5200, etc.

It is possible to replace more than one field at a time (up to all!).
An example: PI Ref: 5*** matches with PI values from 5000 up to 5FFF.

Example:

The PI Code can be Ref1 or Ref2. If a PI Code is different from Ref1 and Ref2 and alarm is generated.
This setting is usefull to broadcaster that change the PI Code during regional broadcasting.

Note2

It is possible to replace any of the four digits of PI fields with a wildcard (represented with an asterisk).
So, for example, a PI Ref. 5*00 will match with 5000, 5100, 5200, etc.

It is possible to replace more than one field at a time (up to all!).
An example: PI Ref: 5*** matches with PI values from 5000 up to 5FFF.

Please focus on comparison mechanism: received PI will be compared first with RefMask1 and then with RefMask2, so this case:

Ref1=5*02 Ref2=54*2 PI=5712

raise an alarm, but

Ref1=5**2 Ref2=1234 PI=5712

matches.

Note3

The PI Code can be compared with Ref1 or Ref2. If a PI Code is different from Ref1 and Ref2 and alarm is generated.
This setting is useful to broadcaster that change the PI Code during regional broadcasting.

Note4

If a Reference is empty no comparison with received PI occurs but only other RefMask is taken into account for a match.
If each Reference Mask are empty no comparison with PI occurs at all.

14.6.23 **RDS PS (Program Service)**

If the Timeout field is =0, the system compares the received PS with 4 inserted Ref1, Ref2, ref3, Ref4. At least one of the 4 PS must match to don't generate an alarm. If no PS (Ref1, Ref2, ref3, Ref4) match an alarm is generated.

If the Timeout field is > 0 the system checks that there is a change of contents of the PS within the time limit specified by the Timeout field and the 4 PS (Ref1, Ref2, ref3, Ref4) otherwise an alarm is generated.

See next page for particular case and behaviour

TUNER-1 - RDS PROGRAM SERVICE											
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll							
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Ref 1	Ref 2	Ref 3	Ref 4	Wild Char	Timeout
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	*****	*****	*****	*****	*	60 se
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	*****	*****	*****	*****	*	60 se
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	DEEJAY	*****	*****	*****	*	60 se
4	RMC	89.20 MHz	-----	5 sec	unmasked	*****	*****	*****	*****	*	60 se

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Ref 1	PS name 1 to be monitored	See Note1 reported below
Ref 2	PS name 2 to be monitored	See Note1 reported below
Ref 3	PS name 3 to be monitored	See Note1 reported below
Ref 4	PS name 4 to be monitored	See Note1 reported below
CharRef	It is possible to configure one "special" character that, in case is present in the Ref field it is not taken in consideration in the checking.	
Timeout	If the Timeout field is > 0 the system checks that there is a change of contents of the PS within the time limit specified by the Timeout field and the 4 PS (Ref1, Ref2, ref3, Ref4) otherwise an alarm is generated.	
Hold	is the time between the cessation of the alarm condition and alarm signaling finished	
Mask		

	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask. PsRef masks accept empty (NULL) strings	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

14.6.24 **Note 1: Particular case for PS check**

N°	DESCRIPTION	BEHAVIOUR
1	Timeout > 0 and PsRef1 (NOT empty) and PsRef2 = NULL (empty)	Wolf2MS search for PsRef1 into PS occurrence. It will can be a sub-string. This solution is useful when PS contains leading or tail blanks. After a time = Timeout if no match occurred, an alarm will be generated;
2	Timeout > 0 and PsRef1 = NULL (empty) and PsRef2 not empty	Wolf2Ms search for PsRef2 into PS. It will can be a sub-string occurrence. After a time = Timeout if no match occurred, an alarm will be generated;
3	Timeout > 0 and PsRef1 not empty and PsRef2 not empty	Wolf2Ms search for PsRef1 AND PsRef2 into PS occurrence. If no match of BOTH PsRef occurred into Timeout, an alarm will be generated;
4	Timeout = 0 and PsRef1 not empty and PsRef2 = NULL (empty)	Wolf2Ms search for PsRef1 into PS (it will can be a sub-string) occurrence. 1 second validation and hold time is required
5	Timeout = 0 and PsRef1 = NULL (empty) PsRef2 not empty	Wolf2Ms search for PsRef2 into PS (it will can be a sub-string) occurrence. 1 second validation and hold time is required
6	Timeout > 0 and PsRef1 = NULL (empty) PsRef2 = NULL (empty)	Wolf2Ms search for PS content changes (useful for PS Scroll monitoring) into Timeout.
7	Timeout = 0 PsRef1=NULL (empty) PsRef2 = NULL (empty)	No action taken into account.
8	Upper Apex. What does it mean?	The upper apex character — appears when some words are inserted in the Ref field box. This is used ONLY to count the number of words (up to 8) inserted in the field.

14.6.25 **Note 2: PS Settings**

As already specified for the alarms driven by an missing truth condition, the invalid condition is often not related to a precise timing. In this case if at the end of the timeout all conditions required aren't verified the alarm is raised and the start of the failure is placed the second after the last valid condition has been verified. The Ps in the varibind is sampled in this moment and so can be even a PS valid. Please consider this behavior definitive. About the alarm triggering rules, please read again the matching criteria for rising an alarm.

Wolf2MS can perform various type of checks on received PS. As can be seen in fig. below, there are four Reference Masks (set by default to '*****'), a CharRef (an asterisk by default), a Timeout field and an Hold field.

Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll							
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Ref 1	Ref 2	Ref 3	Ref 4	Wild Char	Timeout
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	*****	*****	*****	*****	*	60 se
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	*****	*****	*****	*****	*	60 se
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	DEEJAY	*****	*****	*****	*	60 se
4	RMC	89.20 MHz	-----	5 sec	unmasked	*****	*****	*****	*****	*	60 se

System can compare received PS with UP TO four PS Reference Masks. If a Ref Mask is empty no check is performed for that field. CharRef field specify a character (that can be chosen and modified by user) that can be used into PS Ref Masks as a WILDCARD. So, for example, if CharRef='*' and PS Ref 1 = "RADIO***" both received PS = "RADIOABC" that "RADIO123" match with Ref 1. Please pay attention to PS Ref field length. It can be from 1 up to 8 chars long.

Further inserted chars will be ignored. If a 8-chars long PS Ref is specified, the system check for a precise match with received PS (of course taking into account any wildcard occurrence), otherwise PS Ref is considered as a sub-string to be searched for into received PS (wildcard rules are still true). There are four types of operative scenario:

1. At least one PS Ref not empty. Timeout > 0.

System compares received PS with all not empty PS and it search for at least a match with ALL not empty Ref mask in a time under Timeout value. Example: Ref1="RADIO1", Ref2="RADIO2", Ref3="RADIO3", Ref4="" (empty), Timeout=45 sec. Received PS must change in time and should contain "RADIO1", "RADIO2" and "RADIO3" (not necessarily in this 3/3 order). System should recognize at least an occurrence of all three values in 45 seconds or an alarm condition raises up.

2. At least one PS Ref not empty. Timeout=0.

System compares received PS with all not empty PS Ref (sub)string. If a match with anyone of them is found, no alarm condition is set, otherwise alarm rises up instantaneously.

3. ALL Ps Ref empty. Timeout > 0.

System checks only for PS content variations (in a time not exceeding Timeout). This is useful for PS scrolling monitor.

4. ALL Ps Ref empty. Timeout=0.

No check is performed by system. This is not a 'real' operative mode. NOTE: Ref Mask formed by 8 wildcards will match anyway.

14.6.26 **RDS TP (Traffic Program)**

TUNER-1 - RDS TRAFFIC PROGRAM										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Ref	Validation	Hold	Mask	Email
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	off	10 sec	10 sec	masked	disable
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	off	10 sec	10 sec	masked	disable
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	off	10 sec	10 sec	masked	disable
4	RMC	89.20 MHz	-----	5 sec	unmasked	off	10 sec	10 sec	masked	disable

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Ref (Reference)	TP indicates the current value of the Traffic Program. The alarm can be triggered by a value other than the one set in the mask Ref or to a non-variation of more than timer set	
Validation	This field contains the time of persistence necessary to the alarm to be considered "validated". For example, if the system launches an alarm, this alarm must remain "up" or "Active" for all the time of "Validation" to be considered a true alarm to avoid the detection of spikes.	
Hold	is the time between the cessation of the alarm condition and alarm signaling finished	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

14.6.27 **RDS TA (Traffic Announcement)**

TUNER-1 - RDS TRAFFIC ANNOUNCEMENT									
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll					
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	MaxOnTimeout	NoVarTimeout	Mask	Email
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	60 sec	1440 min	masked	disable
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	60 sec	1440 min	masked	disable
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	60 sec	1440 min	masked	disable
4	RMC	89.20 MHz	-----	5 sec	unmasked	60 sec	1440 min	masked	disable

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
MaxOn Timeout	When TA is ON for a time greater than <i>MaxOnTimeout</i> value, an alarm is reported. timeout = 0 no alarms are reported	Value expressed in Seconds
NoVarTimeout	This parameter launches an alarm if there is not a change in the TA for a certain period. This NoVarTimeout is useful to monitor the radio stations that are using TA.	Value expressed in minutes
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

14.6.28

RDS CT (Real Time Clock)

TUNER-1 - RDS CLOCK AND TIME										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Timeout	Max Offset	Mask	Email	Trap
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	130 sec	60 sec	masked	disable	disabl
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	130 sec	60 sec	masked	disable	disabl
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	130 sec	60 sec	masked	disable	disabl
4	RMC	89.20 MHz	-----	5 sec	unmasked	130 sec	60 sec	masked	disable	disabl

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Timeout	Timeout value for CT	See explanation above
Max Offset	The parameter "Max Offset" defines the maximum allowed time difference between CT and Wolf2MS time in seconds.	See explanation above
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

14.6.29 **Particular case for RDS CT - Real Time Clock**

For the Real Time Clock there is a double check:

Case1 – NO INFORMATION RECEIVED/Timeout: if no time information are received from 4A group (CT) for a period greater than *Timeout* value an error is reported.

Case2 – Max Offset: if the received time (inside the 4A group CT) is different than the local Wolf 2MS time for a *MaxOffset* value, an error is reported.

CT		ALARM	
DATE	TIME	LocalTime Offset	Offset Time
30.05.13	07.23	+02.00	8 sec

Note

A Timeout value lower than 60 has no sense, due to the fact that the group 4A is automatically encoded by RDS Encoder.

14.6.30

RDS RT (RadioText)

TUNER-1 - RDS RADIOTEXT										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Timeout	Hold	Mask	Email	Trap
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	60 sec	10 sec	masked	disable	disabl
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	60 sec	10 sec	masked	disable	disabl
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	60 sec	10 sec	masked	disable	disabl
4	RMC	89.20 MHz	-----	5 sec	unmasked	60 sec	10 sec	masked	disable	disabl

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Timeout	The Timeout refers to A/B Flag toggle. When the time between two toggle is greater than Timeout value an alarm is generated.	See important note below
Hold	is the time between the cessation of the alarm condition and alarm signaling finished	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

Important Note: If the timeout = 0 is monitored the presence of groups 2A.

14.6.31 **RDS AF (Alternative Frequency)**

For Alternative Frequencies there is only a presence check. If in the RDS there are no AF's an error is reported.

TUNER-1 - RDS ALTERNATIVE FREQUENCIES										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Validation	Hold	Mask	Email	Trap
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	10 sec	10 sec	masked	disable	disab
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	10 sec	10 sec	masked	disable	disab
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	10 sec	10 sec	masked	disable	disab
4	RMC	89.20 MHz	-----	5 sec	unmasked	10 sec	10 sec	masked	disable	disab

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Validation	This field contains the time of persistence necessary to the alarm to be considered "validated". For example, if the system launches an alarm, this alarm must remain "up" or "Active" for all the time of "Validation" to be considered a true alarm to avoid the detection of spikes.	
Hold	is the time between the cessation of the alarm condition and alarm signaling finished	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

14.6.32 **RDS EON (Enhance Other Network)**

For EON there is only a presence check between group 14A and the Timeout.

If in the RDS there are no passage of group 14A in relation to the Timeout an error is reported.

TUNER-1 - RDS ENANCED OTHER NETWORKS INFORMATIONS										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Timeout	Hold	Mask	Email	Trap
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	60 sec	10 sec	masked	disable	disab
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	60 sec	10 sec	masked	disable	disab
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	60 sec	10 sec	masked	disable	disab
4	RMC	89.20 MHz	-----	5 sec	unmasked	60 sec	10 sec	masked	disable	disab

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Timeout	The timeout refers to 14A group presence, if no data are passing for a timing before timeout, and alarms is reported	
Hold	is the time between the cessation of the alarm condition and alarm signaling finished	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

14.6.33 **RDS IH (In-House)**

For IH there is only a presence check between group 6A and the Timeout.
If in the RDS there are no passage of group 6A in relation to the Timeout an error is reported.

TUNER-1 - RDS IN HOUSE APPLICATIONS									
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll					
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Data Timeout	Group Timeout	Hold	Mask
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	60 sec	60 sec	10 sec	masked
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	60 sec	60 sec	10 sec	masked
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	60 sec	60 sec	10 sec	masked
4	RMC	89.20 MHz	-----	5 sec	unmasked	60 sec	60 sec	10 sec	masked

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Data Timeout	The timeout refers to 6A group presence.	
Group Timeout	The group timeout refers to 6A group presence, if no data are passing for a timing before timeout, and alarms is reported	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

14.6.34 **RDS TMC (Traffic Message Channel)**

TUNER-1 - RDS TRAFFIC MESSAGE CHANNEL										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Timeout Reg.	Timeout Data	Hold	Mask	Email
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	60 sec	60 sec	10 sec	masked	disable
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	60 sec	60 sec	10 sec	masked	disable
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	60 sec	60 sec	10 sec	masked	disable
4	RMC	89.20 MHz	-----	5 sec	unmasked	60 sec	60 sec	10 sec	masked	disable

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Timeout Reg and Timeout Data	Particular attention is placed on TMC and RT+ and in addition two other services that could also be generic ODA TDC and IH. The Wolf 2MS controls the recording of the service through the group 3A and monitored the transmission of data over the corresponding group ODA recorded. For this purpose are provided two timeout, one on the arrival of logging messages of the service and one on the packets containing the data. When you cross the threshold of either an alarm is triggered on the service.	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

14.6.35 **RDS RT+ (Radio Text Plus Service)**

TUNER-1 - RDS RADIO TEXT PLUS										
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll						
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Timeout Reg.	Timeout Data	Hold	Mask	Email
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	60 sec	60 sec	10 sec	masked	disable
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	60 sec	60 sec	10 sec	masked	disable
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	60 sec	60 sec	10 sec	masked	disable
4	RMC	89.20 MHz	-----	5 sec	unmasked	60 sec	60 sec	10 sec	masked	disable

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Timeout Reg and Timeout Data	Particular attention is placed on TMC and RT+ and in addition two other services that could also be generic ODA TDC and IH. The Wolf 2MS controls the recording of the service through the group 3A and monitored the transmission of data over the corresponding group ODA recorded. For this purpose are provided two timeout, one on the arrival of logging messages of the service and one on the packets containing the data. When you cross the threshold of either an alarm is triggered on the service.	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

14.6.36 **RDS ODA1 and ODA2**

TUNER-1 - RDS GENERIC ODA 1											
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll							
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	AID	Timeout Reg.	Timeout Data	Hold	Mask	
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	0000	60 sec	60 sec	10 sec	masked	
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	0000	60 sec	60 sec	10 sec	masked	
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	0000	60 sec	60 sec	10 sec	masked	
4	RMC	89.20 MHz	-----	5 sec	unmasked	0000	60 sec	60 sec	10 sec	masked	

TUNER-1 - RDS GENERIC ODA 2											
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll							
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	AID	Timeout Reg.	Timeout Data	Hold	Mask	
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	0000	60 sec	60 sec	10 sec	masked	
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	0000	60 sec	60 sec	10 sec	masked	
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	0000	60 sec	60 sec	10 sec	masked	
4	RMC	89.20 MHz	-----	5 sec	unmasked	0000	60 sec	60 sec	10 sec	masked	

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
Timeout Reg and Timeout Data	The system can check two registered ODA service in addition to TMC and RT+. These services can be of any type. The behavior is the same seen for TMC.	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	
Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	

14.6.37 **RDS BLER (Block Error Ratio)**

TUNER-1 - RDS BLOCK ERROR RATIO											
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll							
Chan	Chan Label	Frequency	Preset	Scan Time	Chan Mask	Max	Hysteresis	Validation	Hold	Mask	
1	Radio Capital	87.50 MHz	-----	5 sec	unmasked	20 %	5 %	1 sec	1 sec	masked	
2	Punto Radio	87.90 MHz	-----	5 sec	unmasked	20 %	5 %	1 sec	1 sec	masked	
3	Radio deejay	88.70 MHz	-----	5 sec	unmasked	20 %	5 %	1 sec	1 sec	masked	
4	RMC	89.20 MHz	-----	5 sec	unmasked	20 %	5 %	1 sec	1 sec	masked	

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	
Scan Time	This value represents the time in s that the tuner remain on this frequency.	
Chan Mask	This control allow (or not) the channel to be under control.	If it is masked, the channel is NOT under control
MAX	Particular attention is placed on TMC and RT+ and in addition two other services that could also be generic ODA TDC and IH. The Wolf 2MS controls the recording of the service through the group 3A and monitored the transmission of data over the corresponding group ODA recorded. For this purpose are provided two timeout, one on the arrival of logging messages of the service and one on the packets containing the data. When you cross the threshold of either an alarm is triggered on the service.	
Hysteresis level	This value can be set as range of Hysteresis for the measurement. Hysteresis is the dependence of a system not only on its current environment but also on its past environment.	
Validation	This field contains the time of persistence necessary to the alarm to be considered "validated". For example, if the system launches an alarm, this alarm must remain "up" or "Active" for all the time of "Validation" to be considered a true alarm to avoid the detection of spikes.	
Hold	is the time between the cessation of the alarm condition and alarm signaling finished	
Mask	It is possible to set, for each single parameter: unmasked, masked, severity-1, severity-2, severity-3, RFL2 mask.	
Email	In case the alarm/error raise up, the Wolf 2MS sends an email if <enable>. If is <disable> no action are taken.	
Trap	In case the alarm/error raise up, the Wolf 2MS sends a trap if <enable>. If is <disable> no action are taken.	

Label	This is the label/content that the user can choose to shows via email or in the trap in case of error.	
--------------	--	--

14.6.38 RDS Group Transmission Alarm

An alarm is now included to monitor the transmitted Rds groups. A mask allows to define all groups present in the transmission and an alarm is raised if after the timeout one or more groups hasn't been received. The Group Mask is an 32bits integer in HEX. Every bit in this mask is referred to a Rds group. The Group Mask bit0 is the 0A group, the bit1 is the 0B group, the bit2 is the 1A and so on Example: 11 (0A and 2A)

Available the status variable and the trap as well as all parameters to control the state (Timeout, Validation, Hold and Mask)

8°HEX	7°HEX	6°HEX	5°HEX	4°HEX	3°HEX	2°HEX	1°HEX
15B 15A 14B 14A	13B 13A 12B 12A	11B 11A 10B 10A	9B 9A 8B 8A	7B 7A 6B 6A	5B 5A 4B 4A	3B 3A 2B 2A	1B 1A 0B 0A
4°bit 3°bit 2°bit 1°bit	4°bit 3°bit 2°bit 1°bit	4°bit 3°bit 2°bit 1°bit	4°bit 3°bit 2°bit 1°bit	4°bit 3°bit 2°bit 1°bit	4°bit 3°bit 2°bit 1°bit	4°bit 3°bit 2°bit 1°bit	4°bit 3°bit 2°bit 1°bit
0 0 0 1	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 0	0 0 0 1	0 0 0 0	0 0 0 1
HEX=1	HEX=0	HEX=0	HEX=0	HEX=0	HEX=1	HEX=1	HEX=1

Example:

Check 11A,7A,5A,1B,1A,0A =0040440D

Check 15A,14A,0A=50000101

RDS DATA

ALARM

PI	PS	BLER	CT	TP	TA
5123	k	054 %	OK	ON	OFF
M/S	DI	PTY	FILTERS	GROUPS	
MUSIC	STEREO STATIC	NO_PROG	OK	NO	
RT	AF	EON	IH		
OK	OK	OK	---		
TMC	RT+	ODA-1	ODA-2		
---	---	---	---		
LA	EG	ILS	LSN		
OFF	OFF	OFF	000		

RT

ALARM

DATA	A/B
Spaceman / OnAir Now by 4 Non Blondes	1
Always / OnAir Now by Bon Jovi	0

PIN & PTYN

PIN-DATE	PIN-HOUR	PIN-MINUTE	PTYN
--	--	--	-----

RDS GROUPS

ALARM

GROUP-DATA
0A 2A 4A 14A

25	Radio Gamma 93.00	93.00 MHz	Preset-25	2 sec	unmasked	00000001	60 sec	10 sec	10 sec	masked
26	Unknow 105.00	105.00 MHz	Preset-26	3 sec	masked	00000001	60 sec	10 sec	10 sec	masked
27	Local Axel 100.8	100.80 MHz	Preset-27	4 sec	unmasked	50000111	60 sec	10 sec	10 sec	unmasked
28	Chan28 Label	100.00 MHz	Preset-28	5 sec	masked	00000001	60 sec	10 sec	10 sec	masked
29	Chan29 Label	100.10 MHz	Preset-29	2 sec	unmasked	00000001	60 sec	10 sec	10 sec	masked

8°HEX				7°HEX				6°HEX				5°HEX				4°HEX				3°HEX				2°HEX				1°HEX			
15B	15A	14B	14A	13B	13A	12B	12A	11B	11A	10B	10A	9B	9A	8B	8A	7B	7A	6B	6A	5B	5A	4B	4A	3B	3A	2B	2A	1B	1A	0B	0A
4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit	4°bit	3°bit	2°bit	1°bit
0	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	1	0	0	0	1	
HEX=5				HEX=0				HEX=0				HEX=0				HEX=0				HEX=1				HEX=1				HEX=1			

123

 AxelTech

14.6.39 RDS FILTERS

TUNER-1 - RDS GENERIC FILTERS							
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll			
Chan	Chan Label	Frequency	Preset	Channel Ref	Block1 Mask Ref	Block2 Mask Ref	Block3 Masi
1	Radio Capital	87.50 MHz	-----	1	X00000000000000X	X00000000000000X	X00000000000000X
2	Punto Radio	87.90 MHz	-----	1	X00000000000000X	X00000000000000X	X00000000000000X
3	Radio deejay	88.70 MHz	-----	1	X00000000000000X	X00000000000000X	X00000000000000X
4	RMC	89.20 MHz	-----	1	X00000000000000X	X00000000000000X	X00000000000000X

NAME	DESCRIPTION	NOTE
Chan	Channel Number	
Chan Label	Mnemonic name that can be applied to the Channel / Frequency	
Frequency	Frequency corresponding to the Channel, expressed in MHz	
Preset	String used by the configurator	

Foreword: How does generic RDS Data filter works.
Block Masks Mask Ref consist of 16 symbols, each referring to a bit of the data block of information

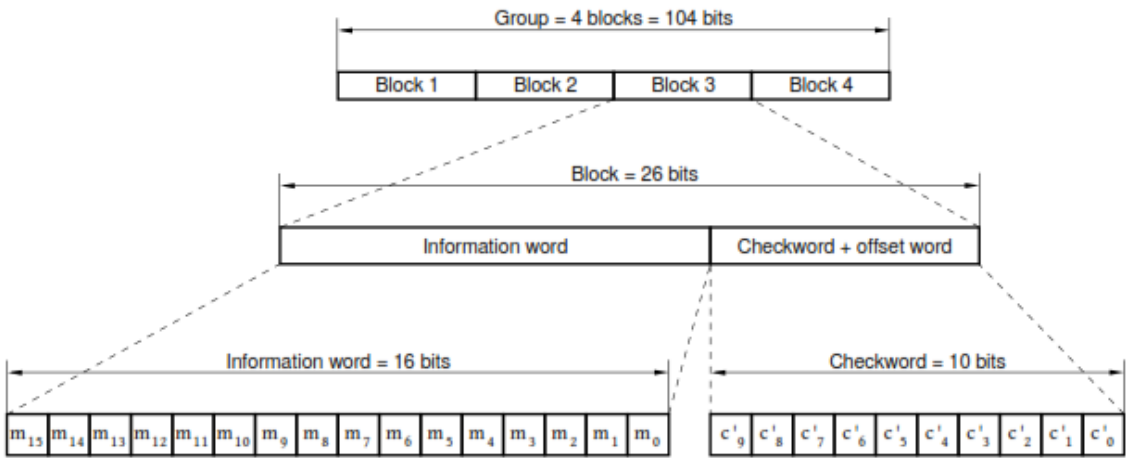


Figure 8 - Structure of the baseband coding

The symbols allowed are 0, 1, X, V.

TUNER-2 - RDS GENERIC FILTERS						
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll		
Chan	Chan Label	Frequency	Preset	Channel Ref	Block1 Mask Ref	Block2 Mask Ref
1	Chan1 Label	95.30 MHz	-----	1	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX
2	Chan2 Label	100.50 MHz	-----	1	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX
3	Chan3 Label	87.50 MHz	-----	1	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX
4	Chan4 Label	87.50 MHz	-----	1	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX
5	Chan5 Label	87.50 MHz	-----	1	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX
6	Chan6 Label	87.50 MHz	-----	1	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX

If we set the mask to a specific bit to 0 or 1, it means that we expect the fixed value in the block (see eg. PI in Block1). If even one or more of these masks do not match after Timeout + Validation Time, an alarm is generated.

If you specify an X for a bit generic, it means that this bit it's masked and its value is not considered.

Finally, if you specify a V for a bit, we expect that, in the time specified by the timeout, there has been a change of state. The length of the mask must be 16 characters. If the length is less will not be accepted if the items are cut higher than 16.

It's possible to associated with one or more filters to a specific channel, simply by associating the index of the channel to the Channel Ref required. For example, here the filters tuned to the channel (the no. 2) are the n. 4 and n. 7:

7

TUNER-2 - RDS GENERIC FILTERS							
Channels Identification				Parameters Setting - Use Mouse (Drag or Wheel) to scroll			
Chan	Chan Label	Frequency	Preset	Channel Ref	Block1 Mask Ref	Block2 Mask Ref	Block3 Mask Ref
1	Chan1 Label	95.30 MHz	-----	1	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX
2	Chan2 Label	100.50 MHz	-----	1	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX
3	Chan3 Label	87.50 MHz	-----	1	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX
4	Chan4 Label	87.50 MHz	-----	2	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX
5	Chan5 Label	87.50 MHz	-----	1	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX
6	Chan6 Label	87.50 MHz	-----	1	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX
7	Chan7 Label	87.50 MHz	-----	2	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX
8	Chan8 Label	87.50 MHz	-----	1	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXX

You can then bind up to 32 filters to a specific channel, or distribute it freely.

IMPORTANT NOTE

In the following examples the ChanRef = 4 because the tuned station is in this specific case on channel 4. Where it is different, this has to be changed congruently.

In all the examples that follow for generality do not check a specific PI, clearly programming the block 1 for a specific PI, the filter also considers the IP than simply the service.

14.6.40 Example 1 - PI with regional variations

Let's see how to set a filter on the data received in order to check for the presence of regional variations.

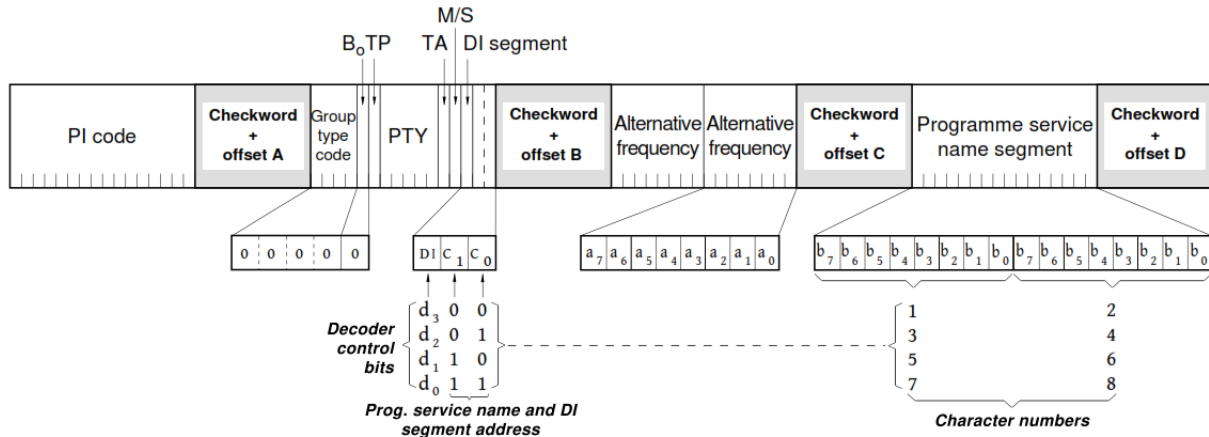


Figure 12 - Basic tuning and switching information - Type 0A group

Then it sets a filter (eg. number 1):
ChanRef = 4

Block1Ref = XXXXVVVVXXXXXXXXXX (we want to verify the change of the IP assigned to regional variations, ignoring the rest)

Block2Ref = xxxxxxxxxxxxxxxxxx (do not take care of the group: the PI is always transmitted)

Block3Ref = xxxxxxxxxxxxxxxxxx (we do not treat)

Block4Ref = xxxxxxxxxxxxxxxxxx (we do not treat)

Timeout = 43200s (time window (1 day) in which I expect the change in the PI)

Validation= 10s Hold = 10s Mask = Unmasked Trap = Enabled

This test allows to verify if at least once a day the PI regional variable changes

With PI = 5124

Country Group	Coverage Area	Ref	Code
PI: IT, JO, SK	INTERNATIONAL	036	5124

After the set time, if the IP does not vary (or varies incorrectly), you have an alarm on the filter:

RDS DATA

ALARM

PI	PS	BLER	CT	TP	TA
5124	RAI	000 %	OK %	ON	ON
M/S	DI	PTY		FILTERS	GROUPS
MUSIC	STEREO STATIC	NO_PROG		NO	OK
RT	AF	EON		IH	
OK	NO	OK		OK	
TMC	RT+	ODA-1		ODA-2	
---	---	---		---	
LA	EG	ILS		LSN	
OFF	OFF	OFF		000	

Logger can also be seen on the trap with the index of the filter that has tripped:

TRAP EVENT LOG		STATUS	
Refresh Download			
[2014-05-07 13:20:41] Trap: TUN1 RDS GROUP FILTER	Chan: 4	Status: 0(OK)	FilterIndex:7 Time: 2014-05-07 13:20:41
[2014-05-07 13:22:03] Trap: TUN1 RDS GROUP FILTER	Chan: 4	Status: 1(ALRM)	FilterIndex:16 Time: 2014-05-07 13:21:54
[2014-05-07 13:23:19] Trap: TUN1 RDS GROUP FILTER	Chan: 4	Status: 0(OK)	FilterIndex:16 Time: 2014-05-07 13:23:10
[2014-05-07 13:26:43] Trap: TUN1 RDS GROUP FILTER	Chan: 4	Status: 1(ALRM)	FilterIndex:16 Time: 2014-05-07 13:26:34
[2014-05-07 13:27:06] Trap: TUN1 RDS GROUP FILTER	Chan: 4	Status: 0(OK)	FilterIndex:16 Time: 2014-05-07 13:26:57
[2014-05-07 13:31:07] Trap: TUN1 RDS GROUP FILTER	Chan: 4	Status: 1(ALRM)	FilterIndex:16 Time: 2014-05-07 13:30:58
[2014-05-07 14:45:42] Trap: TUN1 RDS GROUP FILTER	Chan: 4	Status: 0(OK)	FilterIndex:16 Time: 2014-05-07 14:45:42
[2014-05-07 15:07:29] Trap: TUN1 RDS GROUP FILTER	Chan: 4	Status: 1(ALRM)	FilterIndex:1 Time: 2014-05-07 15:07:20

By changing the regional variant, the alarm will cease.

RDS DATA

ALARM

PI	PS	BLER	CT	TP	TA
5024	RAI	000 %	OK %	ON	ON
M/S	DI	PTY	FILTERS	GROUPS	
MUSIC	STEREO STATIC	NO_PROG	OK	OK	
RT	AF	EON	IH		
OK	NO	OK	---		
TMC	RT+	ODA-1	ODA-2		
---	---	---	---		
LA	EG	ILS	LSN		
OFF	OFF	OFF	000		

And the logger also show a status (OK)

TRAP EVENT LOG		STATUS	
Refresh Download			
[2014-05-07 13:22:03] Trap: TUN1 RDS GROUP FILTER	Chan: 4	Status: 1(ALRM)	FilterIndex:16 Time: 2014-05-07 13:21:54
[2014-05-07 13:23:19] Trap: TUN1 RDS GROUP FILTER	Chan: 4	Status: 0(OK)	FilterIndex:16 Time: 2014-05-07 13:23:10
[2014-05-07 13:26:43] Trap: TUN1 RDS GROUP FILTER	Chan: 4	Status: 1(ALRM)	FilterIndex:16 Time: 2014-05-07 13:26:34
[2014-05-07 13:27:06] Trap: TUN1 RDS GROUP FILTER	Chan: 4	Status: 0(OK)	FilterIndex:16 Time: 2014-05-07 13:26:57
[2014-05-07 13:31:07] Trap: TUN1 RDS GROUP FILTER	Chan: 4	Status: 1(ALRM)	FilterIndex:16 Time: 2014-05-07 13:30:58
[2014-05-07 14:45:42] Trap: TUN1 RDS GROUP FILTER	Chan: 4	Status: 0(OK)	FilterIndex:16 Time: 2014-05-07 14:45:42
[2014-05-07 15:07:29] Trap: TUN1 RDS GROUP FILTER	Chan: 4	Status: 1(ALRM)	FilterIndex:1 Time: 2014-05-07 15:07:20
[2014-05-07 15:25:45] Trap: TUN1 RDS GROUP FILTER	Chan: 4	Status: 0(OK)	FilterIndex:1 Time: 2014-05-07 15:25:36

14.6.41 Example 2 - Control TA / TP

Let's see how to set a filter on the data received in order to check the status of bits TA and TP.

For example if we want an alarm to the radio (which supports the service TA) has the TA = On for a period longer than 10 minutes.

We set the filter:

ChanRef = 4

Block1Ref = xxxxxxxxxxxxxxxx (we do not care this time of the IP)

Block2Ref = 000001XXXXX0XXXX (group 0A - TP = 1 - TA = 0)

Block3Ref = xxxxxxxxxxxxxxxx (we do not treat)

Block4Ref = xxxxxxxxxxxxxxxx (we do not treat)

Timeout = 1200s

Validation=10s Hold =10s Mask=Unmasked Trap=Enabled

An alarm is generated if TA remains unchanged equal to 0 for 20 min

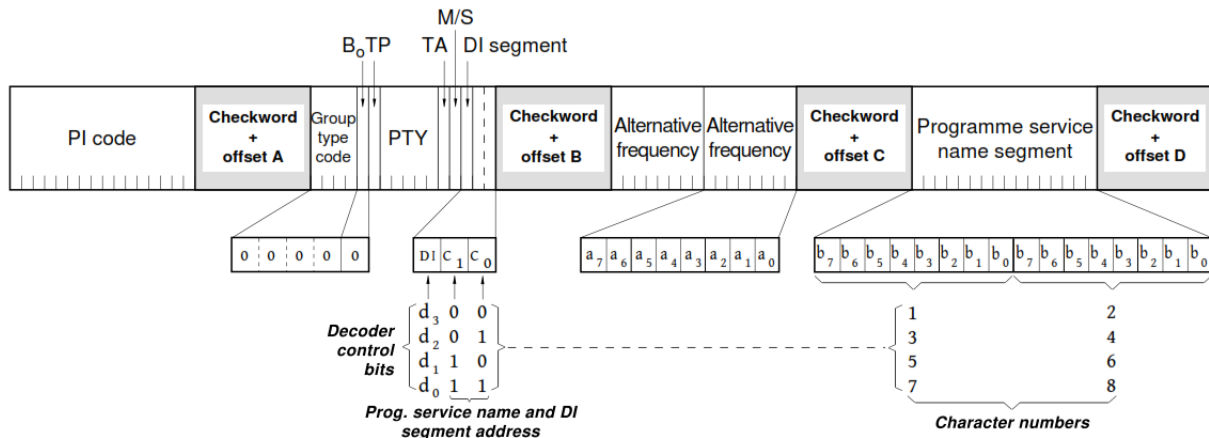


Figure 12 - Basic tuning and switching information - Type 0A group

Starting from TP=1 and TA=0

Traffic Programme	Traffic Announcement
TP: ENABLED	TA: DISABLED

When TA = 1, after the set time, the filter goes into alarm:

Traffic Programme	Traffic Announcement
TP: ENABLED	TA: ENABLED

M/S	DI	PTY	FILTERS	GROUPS
MUSIC	STEREO STATIC	NO_PROG	NO	OK

14.6.42 Example 3 - Control EON AF presence of specific IP

Let's see how to set a filter on the data received in order to check the presence of Mapped Frequencies of EON on a given IP.

Both EON PI = 5201 and there is a list of Eon AF as follows:

TF = 103.3 = 103.5 AF1 AF2 AF3 = 103.6 = 105.2 Method (B): Mapped FM Freq. 1

Let's make sure that the radio transmits the group 14A.

We set the filter:

ChanRef = 4

Block1Ref = xxxxxxxxxxxxxxxx (we do not care this time of the IP)

Block2Ref = 11100XXXXXX0101 (group 14A - Variant 5)

Block3Ref = VVVVVVVVVVVVVVVV (they vary)

Block4Ref = 0101001000000001 (EON PI = 5201)

Timeout = 60s

Validation=10s Hold=10s Mask=Unmasked Trap=Enabled

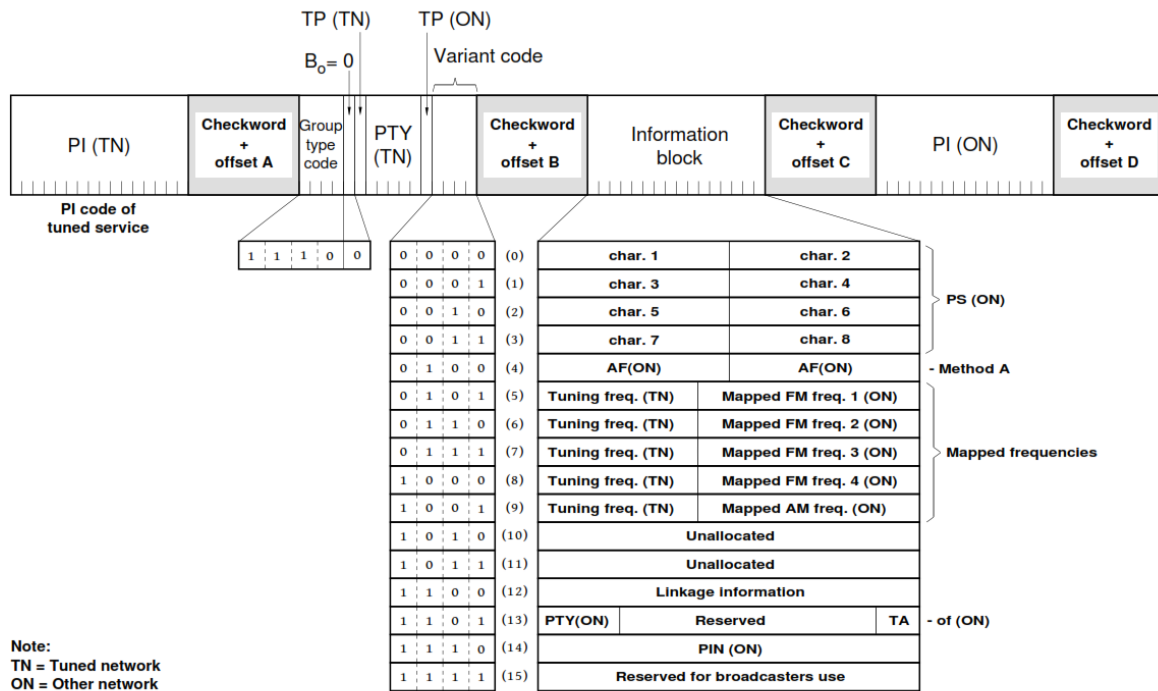


Figure 37 - Enhanced Other Networks information - Type 14A groups

If data are correct, the filter will not rise an alarm. For example, removing the EON AF (or changing the freq. Map), eliminating the EON from the list, removing or changing the group 14A or changing the EON PI filter an alarm is generated.

14.6.43 Example 4 - Control of the toggle A / B flag

Let's see how to set a filter on the data in order to check that it managed the A / B flag in the transmission of RadioText. Attune on a radio that transmits RT with the use of A / B flag (eg. Rai).

We set the filter:
ChanRef = 4

Block1Ref = xxxxxxxxxxxxxxxx (we do not care this time of the IP)

Block2Ref = 00100XXXXXXVXXXX (group 2A - Change in A / B flag)

Block3Ref = VVVVVVVVVVVVVVVV (must vary: they are the characters of the text RT)

Block4Ref = VVVVVVVVVVVVVVVV (must vary: they are the characters of the text RT)

Timeout = 80s

Validation=10s Hold=10s Mask=Unmasked Trap=Enabled

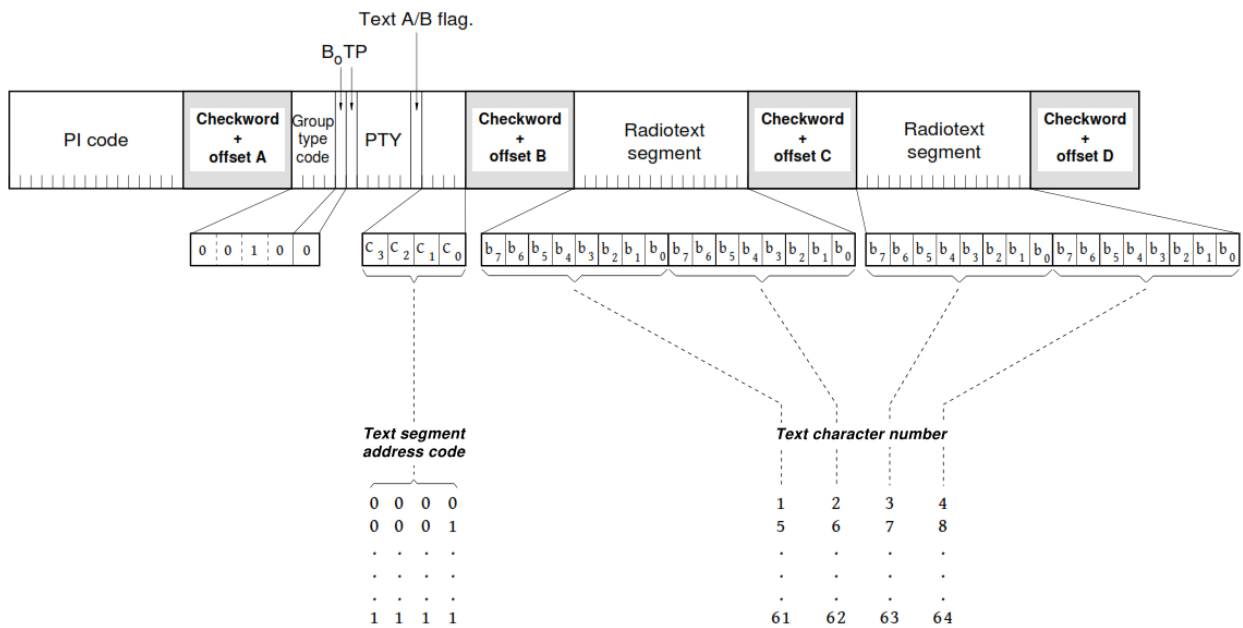


Figure 16 - RadioText - Type 2A group

In this way it 'possible to check the correct reception of the RadioText.

14.6.44 Example 5 - Transparent Data Channel

Let's see how to set a filter on the data in order to check that data is received on channel 1 TDC.


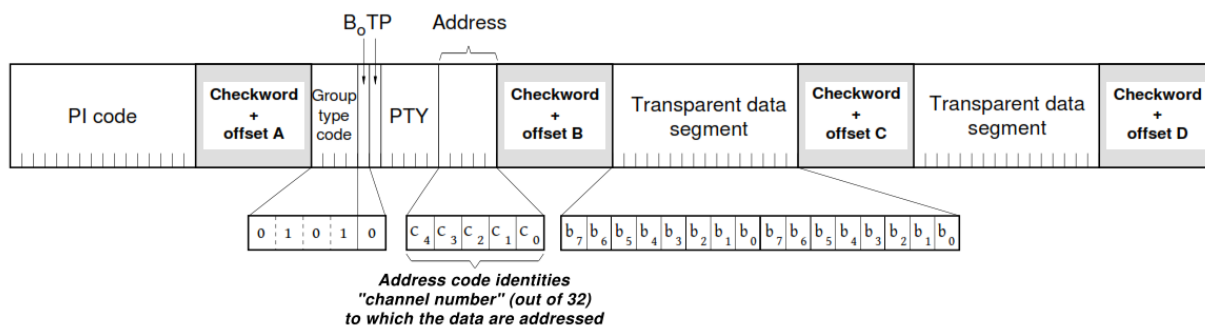


Figure 22 - Transparent data channels - Type 5A group

First, we check to be tuned to a radio that transmits data TDC:



After you set the filter for channel 1:

ChanRef = 4

Block1Ref = xxxxxxxxxxxxxxxx (do not take care of the IP)

Block2Ref = 01010XXXXXX00001 (Group 5A - channel 1)

Block3Ref = VVVVVVVVVVVVVVVV (TDC data must vary)

Block4Ref = VVVVVVVVVVVVVVVV (TDC data must vary)

Timeout = 120s (time window within which the data must vary)

Validation=10s Hold=10s Mask=Unmasked

If the channel over which data is sent is not the # 1 or if the data does not vary (eg.), The filter goes into alarm.

14.6.45 Example 6 - Recording TMC

Let's see how to set a filter on the data in order to check that data is received registration TMC

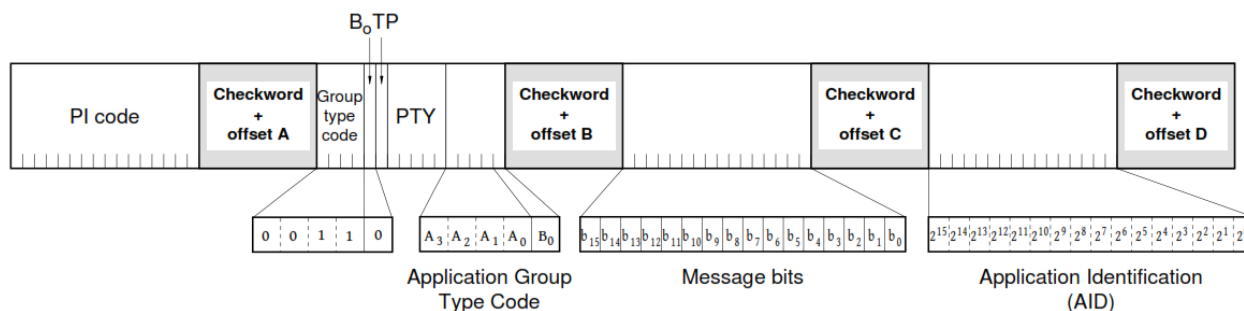


Figure 18 - Application Identification for Open data - Type 3A group

Let the typical case in which the TMC is transported on groups 8A and is recorded with two different messages (Msg1 = 0068, Msg2 = 6040) alternated. Recall that for the TMC AID = CD46.

We set up two filters:

Filter 1:

ChanRef = 4

Block1Ref = xxxxxxxxxxxxxxxx (do not take care of the IP)

Block2Ref = 00110XXXXXX10000 (Group 3A - AGT = 8A)

Block3Ref = 0000000001101000 (message bits = 0068)

Block4Ref = 1100110101000110 (AID TMC = CD46)

Timeout = 120s (time window within which the data must vary)

Validation=10s Hold=10s Mask= Unmasked

Filter 2:

ChanRef = 4

Block1Ref = xxxxxxxxxxxxxxxx (do not take care of the IP)

Block2Ref = 00110XXXXXX10000 (Group 3A - AGT = 8A)

Block3Ref = 0110000001000000 (message bits = 6040)

Block4Ref = 1100110101000110 (AID TMC = CD46)

Timeout = 120s (time window within which the data must vary)

Validation=10s Hold=10s Mask= Unmasked

If the service is transmitted correctly there is no alarm.

14.6.46 Example 7 - Alert C on TMC

Let's see how to set a filter on the data in order to check that data is received TMC properly. Head if the bit X4 Alert-C is equal to 0 for more than the timeout and / or no data block 3-4 is varied in time out. If X4 = 0 (bit 5 Block2) data traffic are transmitted, X4 = 1 if the data are ancillary information not directly related to the service then X4 = 1 for a longer time than expected and 'alarm condition.

We set the filter:

Filter 1:

ChanRef = 4

Block1Ref = xxxxxxxxxxxxxxxx (do not take care of the IP)

Block2Ref = 10000XXXXXX0XXXX (group 8A - bit X4)

Block3Ref = VVVVVVVVVVVVVVVV (TMC data: they vary)

Block4Ref = VVVVVVVVVVVVVVVV (TMC data: they vary)

Timeout = 3600s (the time window within which the data must vary)

Validation=10s Hold=10s Mask= Unmasked

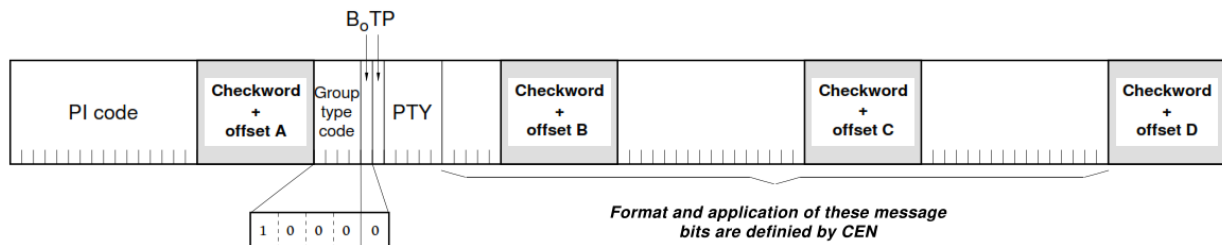


Figure 27 - Traffic Message Channel - Type 8A group

NOTE: Alarms Filter type not supported in SMART-SCAN mode. Then an alarm of this type does not block the scan. We recommend that you use this feature to scan just to test repetitive conditions.

14.1 AUDIO 1 - SETUP

This section allows the user to configure the audio source delivered to the Audio Streamer Module.

AUDIO	
AUDIO-1 GLOBAL SETUP	AUDIO-2 GLOBAL SETUP
Audio1 Source Tuner-1	Audio2 Source Tuner-2
Audio1 Signal Name Audio1Name	Audio2 Signal Name Audio2Name
STREAM-1 GLOBAL SETUP	STREAM-2 GLOBAL SETUP
Stream1 Source Gain 10.00 dB	Stream2 Source Gain 10.00 dB
Stream1 Encoder vorbis	Stream2 Encoder vorbis
Stream1 BitRate 64kbits	Stream2 BitRate 40kbits
Stream1 Mode stereo	Stream2 Mode stereo
ANALOG INPUT SILENCE SETUP	DIGITAL INPUT SILENCE SETUP
Audio Analog Left Silence Trap Label AudioTrap	Audio Digital Left Silence Trap Label AudioTrap
Audio Analog Left Silence Thr -20.00 dBr	Audio Digital Left Silence Thr -20.00 dBr
Audio Analog Left Silence Time 20 sec	Audio Digital Left Silence Time 20 sec
Audio Analog Left Silence Hold 2 sec	Audio Digital Left Silence Hold 2 sec
Audio Analog Left Silence Mask masked	Audio Digital Left Silence Mask masked
Audio Analog Left Silence Email Enable disabled	Audio Digital Left Silence Email Enable disabled
Audio Analog Left Silence Trap Enable	Audio Digital Left Silence Trap Enable

AUDIO-1 GLOBAL SETUP	Audio1 Source: This setting allows to deliver to the Audio-1 stream module, an audio source that can be selected between Tuner-1 or Tuner-2 or Analog or Digital. It is also possible to Audio1 Signal Name: it is possible to apply a name to the signal delivered to the streamer.
STREAM-1 GLOBAL SETUP	Stream Source Gain: is the gain that is applied to the Audio Source. The admitted values are between -20.0 dB and +20.0 dB in 0.1dB steps. Stream1 Encoder: it is possible to decide what type of audio encoder to use for the streaming. Stream1 BitRate: in this setup it is possible to decide the audio encoding bitrate Stream1 Mode: it is possible to choose if the streaming is Mono or Stereo

14.2 AUDIO 2 - SETUP

This section allows the user to configure the audio source delivered to the Audio Streamer Module.

AUDIO-2 GLOBAL SETUP Audio2 Source Tuner-2 Audio2 Signal Name Audio2Name	Audio2 Source: This setting allows to deliver to the Audio-1 stream module, an audio source that can be selected between Tuner-1 or Tuner-2 or Analog or Digital. It is also possible to Audio2 Signal Name: it is possible to apply a name to the signal delivered to the streamer.
STREAM-2 GLOBAL SETUP Stream2 Source Gain 0.00 dB Stream2 Encoder mp3 Stream2 BitRate 32Kbit Stream2 Mode mono	Stream2 Source Gain: is the gain that is applied to the Audio Source. The admitted values are between -20.0 dB and +20.0 dB in 0.1dB steps. Stream2 Encoder: it is possible to decide what type of audio encoder to use for the streaming. Stream2 BitRate: in this setup it is possible to decide the audio encoding bitrate Stream2 Mode: it is possible to choose if the streaming is Mono or Stereo

14.3 ANALOG AUDIO INPUT SETUP

The following setup is about the Analog Input Module, alarms generation and configurable settings. The A.A.L means Audio Analog Left while A.A.R means Audio Analog Right.

ANALOG INPUT SILENCE SETUP	
Audio Analog Left Silence Trap Label	Audio Analog Left Silence Trap Label: define the Trap label over the NMS manager.
AudioTrap	
Audio Analog Left Silence Thr	A.A.L.Silence Threshold: defines the threshold level to be considered audio or silence.
-20.00 dBr	
Audio Analog Left Silence Time	A.A.L.Silence Time: defines the maximum time under A.A.L.Silence Threshold to consider the input audio not valid (as silence)
20 sec	
Audio Analog Left Silence Hold	A.A.L.Silence Hold: It's the time in which the audio signal must be stably present to be considered valid.
2 sec	
Audio Analog Left Silence Mask	A.A.L.Silence Mask: if this parameter is Mask the silence error is not reported, while unmasked means the error is visible and reported.
masked	
Audio Analog Left Silence Email Enable	A.A.L.Silence Email Enabled: this parameter enable the email sending in case of silence error.
disabled	
Audio Analog Left Silence Trap Enable	A.A.L.Silence Trap Enabled: this parameter enable the Trap sending in case of silence error.
enabled	

Audio Analog Right Silence Trap Label	Audio Analog Right Silence Trap Label: define the Trap label over the NMS manager.
AudioTrap	
Audio Analog Right Silence Thr	A.A.R.Silence Threshold: defines the threshold level to be considered audio or silence.
-20.00 dBr	
Audio Analog Right Silence Time	A.A.R.Silence Time: defines the maximum time under A.A.R.Silence Threshold to consider the input audio not valid (as silence)
20 sec	
Audio Analog Right Silence Hold	A.A.R.Silence Hold: It's the time in which the audio signal must be stably present to be considered valid.
2 sec	
Audio Analog Right Silence Mask	A.A.R.Silence Mask: if this parameter is Mask the silence error is not reported, while unmasked means the error is visible and reported.
masked	
Audio Analog Right Silence Email Enable	A.A.R.Silence Email Enabled: this parameter enable the email sending in case of silence error.
disabled	
Audio Analog Right Silence Trap Enable	A.A.R.Silence Trap Enabled: this parameter enable the Trap sending in case of silence error.
disabled	

14.4 DIGITAL AUDIO INPUT SETUP

The following setup is about the Digital Input Module, alarms generation and configurable settings. The A.D.L means Audio Digital Left while A.D.R means Audio Digital Right.

DIGITAL INPUT SILENCE SETUP Audio Digital Left Silence Trap Label AudioTrap Audio Digital Left Silence Thr -20.00 dBr Audio Digital Left Silence Time 20 sec Audio Digital Left Silence Hold 2 sec Audio Digital Left Silence Mask masked Audio Digital Left Silence Email Enable disabled Audio Digital Left Silence Trap Enable disabled	A.D.L Silence Trap Label: define the Trap label over the NMS manager. A.D.L Silence Threshold: defines the threshold level to be considered audio or silence. A.D.L Silence Time: defines the maximum time under A.D.L.Silence Threshold to consider the input audio not valid (as silence) A.D.L Silence Hold: It's the time in which the audio signal must be stably present to be considered valid. A.D.L Silence Mask: if this parameter is Mask the silence error is not reported, while unmasked means the error is visible and reported. A.D.L Silence Email Enabled: this parameter enable the email sending in case of silence error. A.D.L Silence Trap Enabled: this parameter enable the Trap sending in case of silence error.
Audio Digital Right Silence Trap Label AudioTrap Audio Digital Right Silence Thr -20.00 dBr Audio Digital Right Silence Time 20 sec Audio Digital Right Silence Hold 2 sec Audio Digital Right Silence Mask masked Audio Digital Right Silence Email Enable disabled Audio Digital Right Silence Trap Enable disabled	Audio Digital Right Silence Trap Label: define the Trap label over the NMS manager. A.D.R.Silence Threshold: defines the threshold level to be considered audio or silence. A.D.R.Silence Time: defines the maximum time under A.A.R.Silence Threshold to consider the input audio not valid (as silence) A.D.R.Silence Hold: It's the time in which the audio signal must be stably present to be considered valid. A.D.R.Silence Mask: if this parameter is Mask the silence error is not reported, while unmasked means the error is visible and reported. A.D.R.Silence Email Enabled: this parameter enable the email sending in case of silence error. A.D.R.Silence Trap Enabled: this parameter enable the Trap sending in case of silence error.

15 WOLF 2MS SCAN AND SMART SCAN MODE

Once Scan or Smart Scan is selected in Settings -> Tuner-1 (or Tuner-2) -> Global as per picture shown below, the Wolf 2MS start scanning the channels selected.

TUNER-1 - GLOBAL SETUP

GLOBAL SETTINGS

- Tuning Mode**: SmartScan
- Last Channel Scanning Index**: 32
- Static Channel Index**: 3
- Deemphasis**: 50uSec
- Global Tuner Mask Mode**: individual masking
- External Attenuator**: 0.00 dB

In the menu Last Channel Scanning index it's possible to select the last channel that Wolf 2MS needs to scan starting from the channel n°1. To set the scan time go in RF or any tab available. To see the result of the scanning press the Tuner-1 Data or Tuner-2 Data and see that the that a list of channel appears.


TUNER-1							
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
1	87.50 MHz	Radio Capital	S-SCAN	ALARM	ALARM	ALARM	▼
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
2	87.90 MHz	Punto Radio	S-SCAN	ALARM	ALARM	ALARM	▼
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
3	---.--- MHz			ALARM	ALARM	ALARM	▼
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
4	---.--- MHz			ALARM	ALARM	ALARM	▼
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
5	---.--- MHz			ALARM	ALARM	ALARM	▼
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
6	---.--- MHz			ALARM	ALARM	ALARM	▼
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
7	---.--- MHz			ALARM	ALARM	ALARM	▼
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
8	---.--- MHz			ALARM	ALARM	ALARM	▼
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
9	---.--- MHz			ALARM	ALARM	ALARM	▼
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
10	---.--- MHz			ALARM	ALARM	ALARM	▼
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
11	---.--- MHz			ALARM	ALARM	ALARM	▼
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
12	---.--- MHz			ALARM	ALARM	ALARM	▼
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
13	---.--- MHz			ALARM	ALARM	ALARM	▼
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
14	---.--- MHz			ALARM	ALARM	ALARM	▼

16 TECHNICAL APPENDIX


The following provides all the technical explanations, the connection pinouts to and from the Wolf 2MS device. Always refer to this technical appendix for the connections and the connection procedures. Should you discover inconsistencies between the documentation below and the hardware device, please contact Axel Technology at the numbers and emails provided at the end of this manual. Our technical and support department will be happy to help and assist you to the best of our ability!

16.1 APPENDIX A - BALANCED AUDIO AND PINOUT CONNECTION


Connection diagram Balanced Audio on Balanced XLR for Analog audio **Input** and **Output** (Left+Right) and **Input** and **Output** AES/EBU Digital Audio.

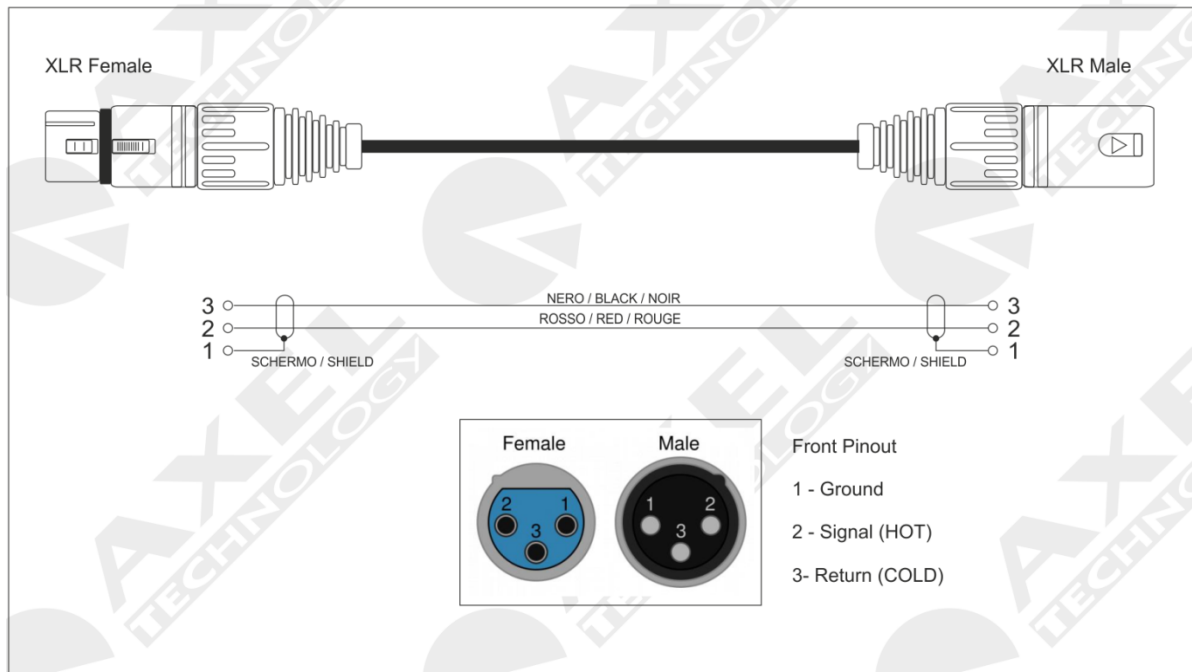


16.2 APPENDIX B - USB A/B CONNECTION

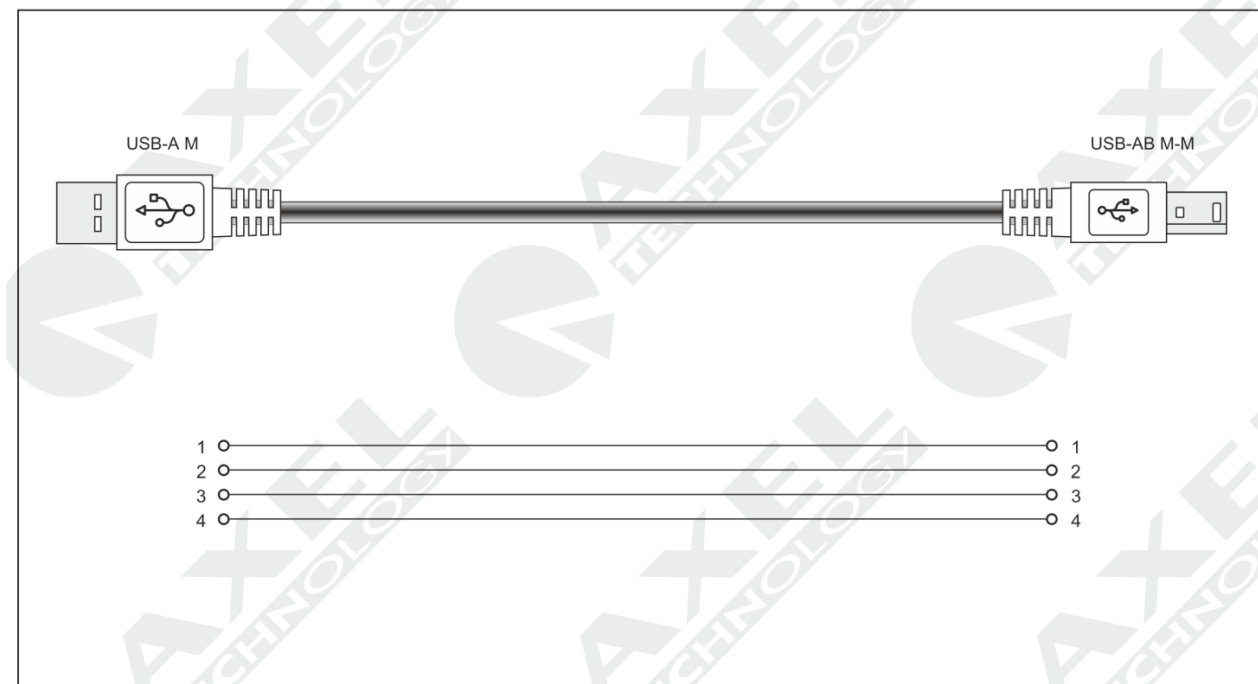

16.3 APPENDIX C – ETHERNET / LAN CONNECTION

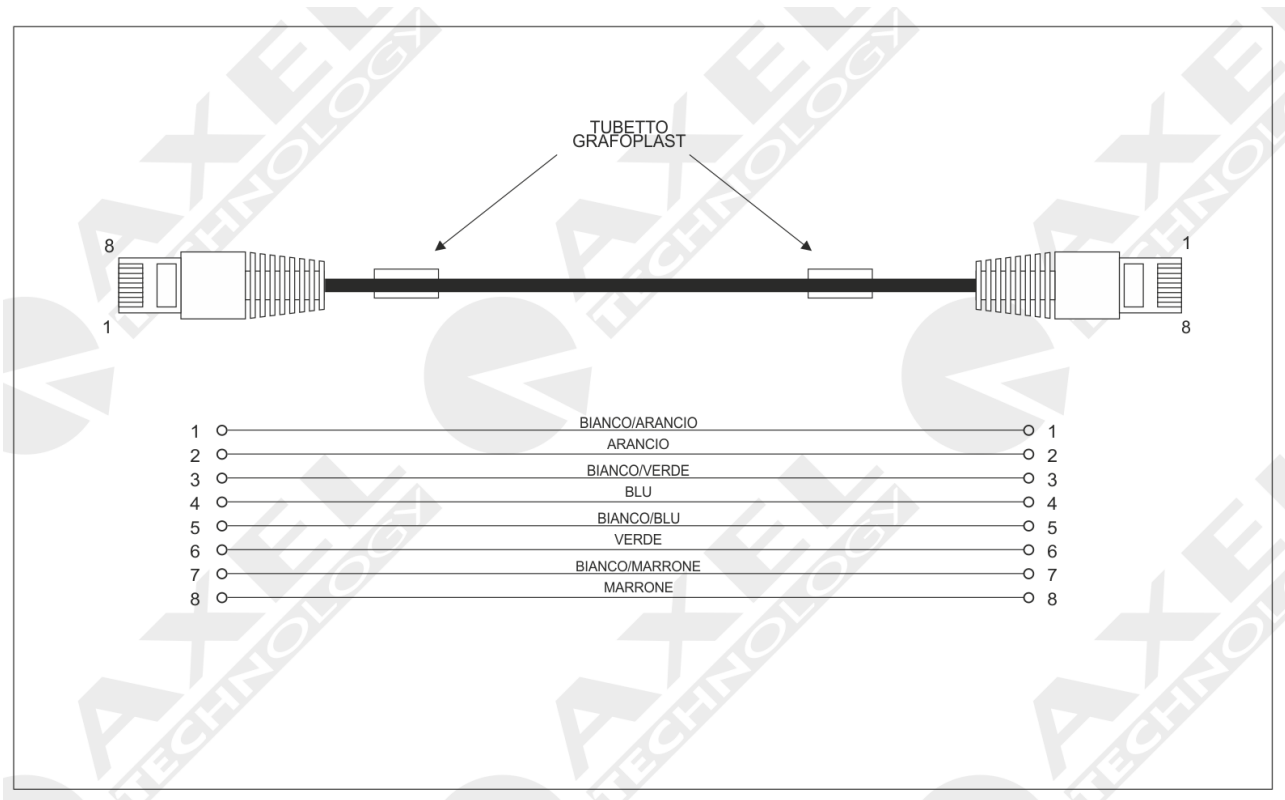

16.4 APPENDIX D – SERIAL CONNECTION

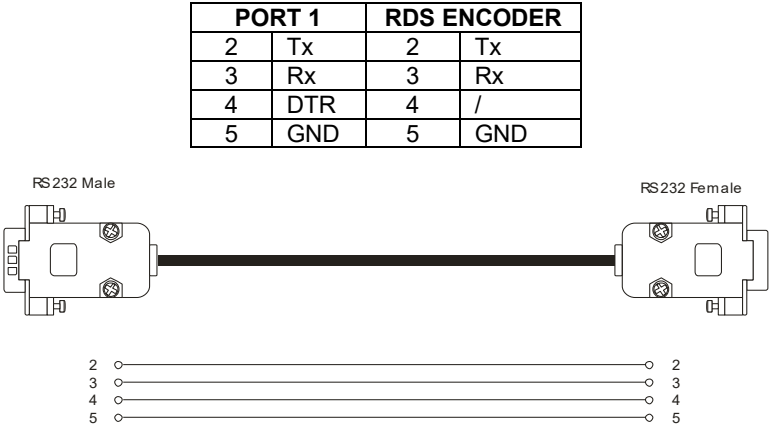


The cable that must be used to connect a RDS UECP encoder to Wolf 2MS must be a straight forward cable. A common Pin-to-Pin subD 9pole Female-Male. The maximum length must be 10mt. This cable can be used between WOLF 2MS and a RDS Encoder UECP compliant. The RDS data bridging can be achieved by connecting the Serial output from Wolf 2MS to the RDS Encoder data input. Please refer to this user manual and the RDS Encoder user manual to set the correct speed data and baud rate.

16.5 APPENDIX E - GPIO PORT

The SubD 15p HD **GPIO** connector on the back of the Wolf 2 MS device provides 4x General Purpose Inputs and 4x binary General Purpose outputs. The inputs are on polarised Opto coupler while the outputs are via relay dry contact.

They can be used to send commands to the device and perform certain tasks. The inputs are constituted by polarised photo couplers on each input and a 150 Ohm protection resistance in series is always inserted within. The maximum current that can circulate on every photo coupler is 20 mA. The voltage supplied between pin 8 and pin 15 is +5 Vdc non stabilized.

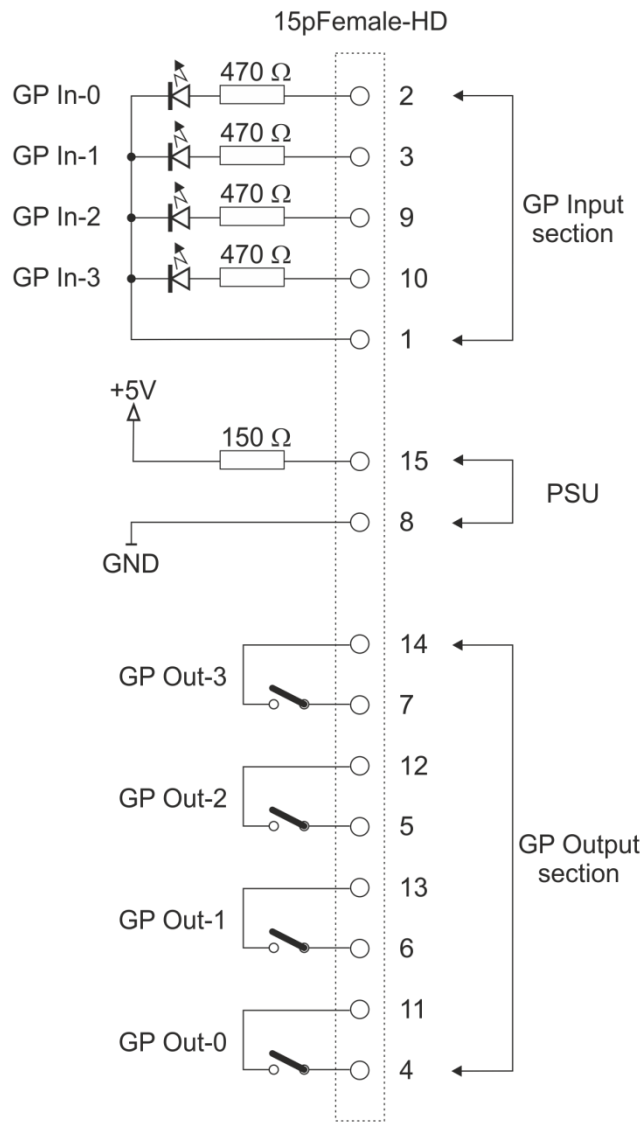


Relay maximum absolute ratings
Switching voltage = 220 Vac
Switching current = 2 A

16.6 APPENDIX F – WOLF 2MS UPGRADE PROCEDURE

In order to upgrade a Wolf 2MS equipment some software equipment are needed before the upgrade:


1. A FTP client installed in the pc workstation.
2. OS should be Windows XP or Windows 7.
3. Get the file “Update.taz.gz” from Axel Technology – please contact the support dept.
4. Connect the FTP client to Wolf 2MS with **username:** upgrader **password:** wolf2ms

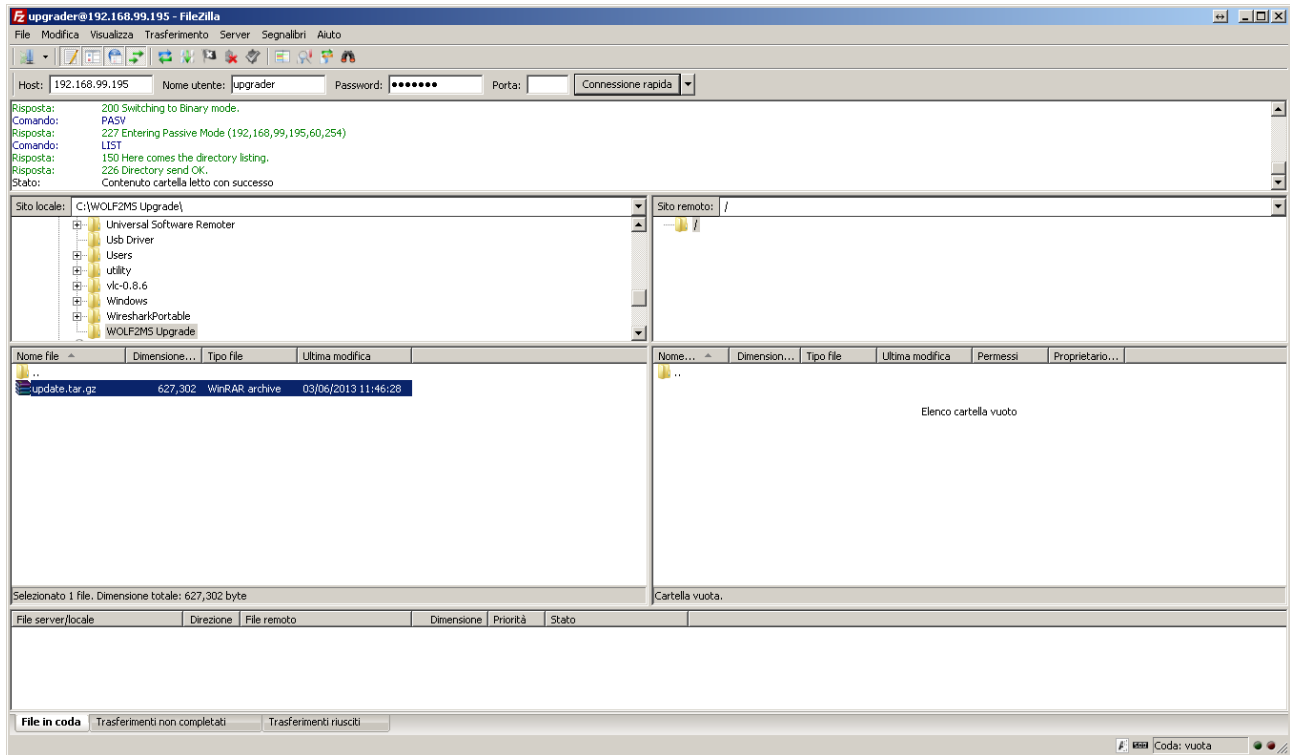

5. When the FTP client is connect, the destination folder appears automatically.
6. Copy the file in this folder.
7. Now a reboot is necessary, and can be performed.
 - a. Manually, by shutting down the unit and reboot Wolf 2MS via the rear panel switch
 - b. Via web with the url: http://<ip_wolf2ms>/cgi-bin-auth/reboot.cgi



- c. At this page a login is required. (**username:** upgrader **password:** wolf2ms)



Rebooting now... bye!

16.6.1 Note about upgrading from rel 0.4.1 – 0.4.7

Starting from Wolf 2MS release 0.4.7 it is necessary to update and upgrade the complete equipment, starting from

- a. **File System (then)**
- b. **Kernel (then)**
- c. **Firmware**


The correct upgrading procedure starting from firmware release 0.4.1 ore 0.4.7 is

1. File System
2. Kernel
3. Firmware rel 0.5.1
4. Firmware rel 0.6.1
5. Firmware rel 0.6.6
6. Firmware rel 0.6.x
7. Firmware and Kernel 0.8.5


It is possible to retrieve the correct File System, Kernel and Firmware release asking Axel Technology support dept

support@axeltechnology.com

Step 1: File System Upgrade

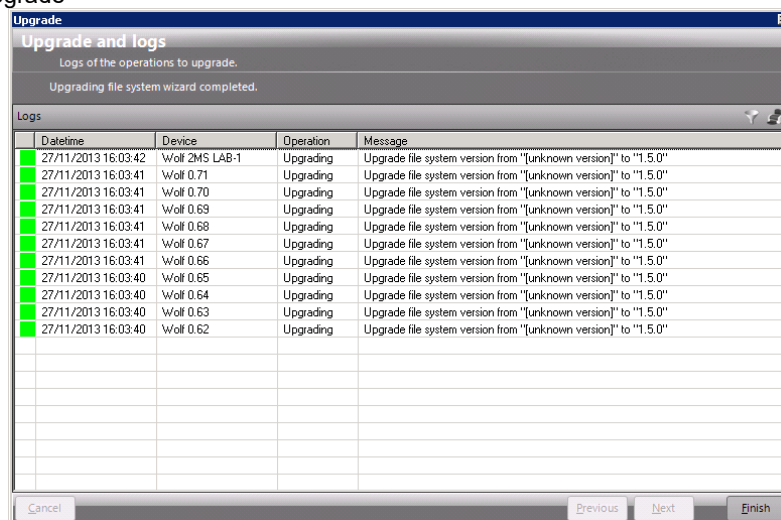

Step 2: Kernel Upgrade

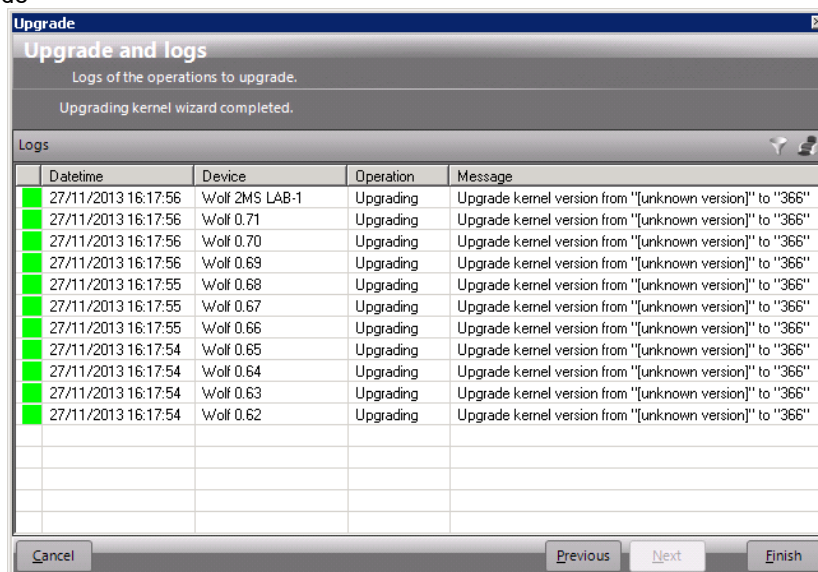

Step 3: Firmware Upgrade from 0.4.1 to 0.5.1

The screenshot shows a window titled "Upgrade and logs" with a subtitle "Logs of the operations to upgrade." Below this, a message states "Upgrading firmware wizard completed." A "Logs" section contains a table with the following data:

	Datetime	Device	Operation	Message
■	27/11/2013 16:30:04	Wolf 2MS LAB-1	Upgrading	Upgrade firmware version from "0.4.1" to "0.5.1"
■	27/11/2013 16:30:04	Wolf 0.71	Upgrading	Upgrade firmware version from "0.4.1" to "0.5.1"
■	27/11/2013 16:30:04	Wolf 0.70	Upgrading	Upgrade firmware version from "0.4.1" to "0.5.1"
■	27/11/2013 16:30:04	Wolf 0.69	Upgrading	Upgrade firmware version from "0.4.1" to "0.5.1"
■	27/11/2013 16:30:04	Wolf 0.68	Upgrading	Upgrade firmware version from "0.4.1" to "0.5.1"
■	27/11/2013 16:30:04	Wolf 0.67	Upgrading	Upgrade firmware version from "0.4.1" to "0.5.1"
■	27/11/2013 16:30:03	Wolf 0.66	Upgrading	Upgrade firmware version from "0.4.1" to "0.5.1"
■	27/11/2013 16:30:03	Wolf 0.65	Upgrading	Upgrade firmware version from "0.4.1" to "0.5.1"
■	27/11/2013 16:30:03	Wolf 0.64	Upgrading	Upgrade firmware version from "0.4.1" to "0.5.1"
■	27/11/2013 16:30:03	Wolf 0.63	Upgrading	Upgrade firmware version from "0.4.1" to "0.5.1"
■	27/11/2013 16:30:03	Wolf 0.62	Upgrading	Upgrade firmware version from "0.4.1" to "0.5.1"

At the bottom of the window are four buttons: "Cancel", "Previous", "Next", and "Finish".

Step 4: Firmware Upgrade from 0.5.1 to 0.6.1

Upgrade

Upgrade and logs

Logs of the operations to upgrade.

Upgrading firmware wizard completed.

Logs

Datetime	Device	Operation	Message
27/11/2013 16:34:47	Wolf 2MS LAB-1	Upgrading	Upgrade firmware version from "0.5.1" to "0.6.1"
27/11/2013 16:34:47	Wolf 0.71	Upgrading	Upgrade firmware version from "0.5.1" to "0.6.1"
27/11/2013 16:34:47	Wolf 0.70	Upgrading	Upgrade firmware version from "0.5.1" to "0.6.1"
27/11/2013 16:34:47	Wolf 0.69	Upgrading	Upgrade firmware version from "0.5.1" to "0.6.1"
27/11/2013 16:34:47	Wolf 0.68	Upgrading	Upgrade firmware version from "0.5.1" to "0.6.1"
27/11/2013 16:34:47	Wolf 0.67	Upgrading	Upgrade firmware version from "0.5.1" to "0.6.1"
27/11/2013 16:34:47	Wolf 0.66	Upgrading	Upgrade firmware version from "0.5.1" to "0.6.1"
27/11/2013 16:34:47	Wolf 0.65	Upgrading	Upgrade firmware version from "0.5.1" to "0.6.1"
27/11/2013 16:34:47	Wolf 0.64	Upgrading	Upgrade firmware version from "0.5.1" to "0.6.1"
27/11/2013 16:34:47	Wolf 0.63	Upgrading	Upgrade firmware version from "0.5.1" to "0.6.1"
27/11/2013 16:34:46	Wolf 0.62	Upgrading	Upgrade firmware version from "0.5.1" to "0.6.1"

Cancel Previous Next Finish

Firmware Upgrade from 0.6.1 to 0.6.6

[illegible]

16.7 APPENDIX G – WOLF 2MS CONSIDERATION ON FW REL 1.2.1

In latest Wolf 2MS Firmware Release 1.2.1 has been improved and fixed the following features.

1. Highlights

- Bug fix about issue concerning reboot and related issues
- Bug fix about audio parameter saving
- During NMS parameter change operation a bug was blocking the SNMP
- Label correction of NMS-3
- Has been added the information that trap-timeout and trap-retry work only in informV2 mode
- Improved the trap retry from 100 to 1000
- Tested Trap behavior with no Ethernet connection

2. Information about new firmware rel.

- a. Only if has been selected InformV2, traps are automatically managed and repeated until an acknowledgement has been received by NMS system.
- b. InformV2 protocol provides as reported below: informV2 this protocol provides:
 - The agent, in this case wolf2ms should try again with a certain time period defined trap-timeout and return to N times (trap-Retry) the same trap if it does not receive an ACK (acknowledgement) from the NMS.

Scenario -1 example:

if we set (Trap-Type:informV2, Trap-Timeout:10, Trap-Retry:360) we are going to set Wolf 2MS to retry for about 1 hour to find an ACK from NMS server. All the traps are queued waiting for a response with the above example by disconnecting the network cable for a time below 1 hour, and creating events, as soon as cable has been reconnected (or Server has been closed and the opened again) all the traps queued are delivered.

If the timing in sec is exceeded (Trap-timeout*Trap-Retry) all the traps will be lost.

- c. Trap order is not granted as mentioned in the protocol, because it's a delivery retry. The traps arriving is determined by the Ethernet link come back, each trap contains all the timing information of the events so the information can pass with no problem.
- d. We have done some test by disconnecting the network until 30 minutes and all the workflow is perfectly granted.
- e. Using v1 or V2simple mode there is a simple trap delivery

3. Trap replay:

Wolf 2MS also supports trap-replay features replay (iTrapReplayEnabledTrapsReq). The server knows that the synchronization could be lost and can ask to the agent (Wolf 2MS) all the variation that has been happened about issue and alarms on the trap enabled. So a trap comes resend for each status variations that has been happened

Scenario -2 example:

The system works this way: the informV2 mode must plug gaps and short causal connection. Long connection interruptions should be managed by the NMS server with a trapReplay request. Now the maximum time is 60 * 1000 seconds. So it could be managed until almost a day's lack of linkage.

Note:

If you change the parameters of the NMS pages, these become active 20-30 seconds later.

16.8 APPENDIX H – WOLF 2MS TEST PROCEDURE AND CONSIDERATION

Scope of the test proposal is to verify and test all Wolf2MS functionalities in order to check in detail the behavior of all equipment. We will split all Wolf2MS functions in three Groups and test every function, checking and comparing the results with the expected ones in all interfaces available (WEB PAGES, SNMP, Front Panel display and Leds).

For every function an example configuration will be described in a nominal situation, as well as what happens when an alarm rises up. The expected timing will be indicated with the related measurements and in brief the effects on all interfaces.


All the tests will be done and the variations explained on all the three possible situations (Static, Scan, SmartScan). For every function will be indicated if an improvement is planned in the next releases or must be considered definitive.

The scope of this test isn't a strict measure sequence, but scan all functionalities together for finding bugs, unexpected behaviors on one or more interfaces, for enhancing weak and strong points of the system.

So, the test configuration proposed is only an example to follow, the important thing will be for every functionality have a report about the test results. Every buggy behavior found will be fixed in the next release, every improvement suggested will be discussed and every limitation found will be defined.

16.9 SYNCH TO PC TIME

By pressing the “Synch to PC Time” button, the WOLF2MS will be synchronized with the PC Clock

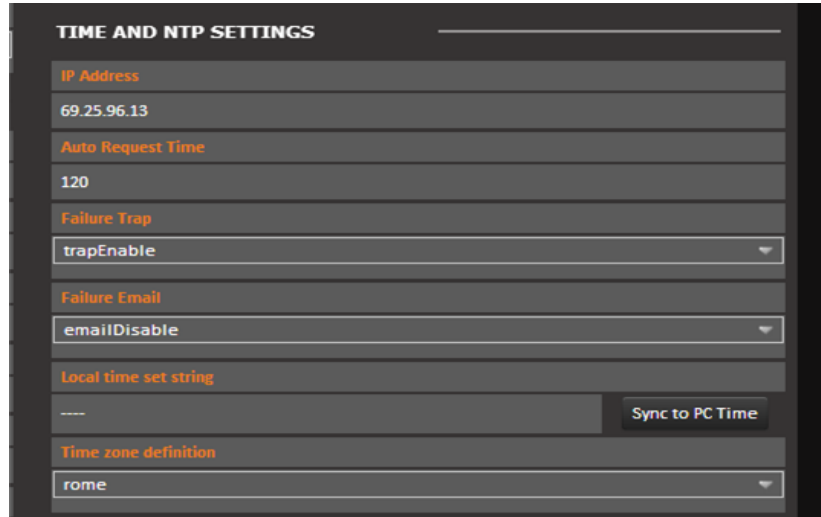

The screenshot displays a configuration interface titled "TIME AND NTP SETTINGS". It contains several input fields and a button:

- IP Address:** 69.25.96.13
- Auto Request Time:** 120
- Failure Trap:** trapEnable (dropdown menu)
- Failure Email:** emailDisable (dropdown menu)
- Local time set string:** ---- (text field)
- Time zone definition:** rome (dropdown menu)
- Sync to PC Time:** A button located next to the "Local time set string" field.


16.10 NTP

To activate the NTP auto synchronization set a not zero value in AutoRequest Time.

After a modification of this parameter or a modification of the NTP IP address, the Wolf2MS will try to synchronize the system clock. After the first synchronization, the server will be contacted automatically with the selected period in minutes.

After a system reboot or restart, if AutoRequestTime is activated, in the first operative minute the NTP-V3 server will be contacted, as well as after the selected period.

The NtpSynch status starts as OK(synchronized) at the system startup, but after the first synchronization attempt it will show the real status. Every NtpSynch status variation is signaled (if enabled) with the NtpFailureNotificationTrap.

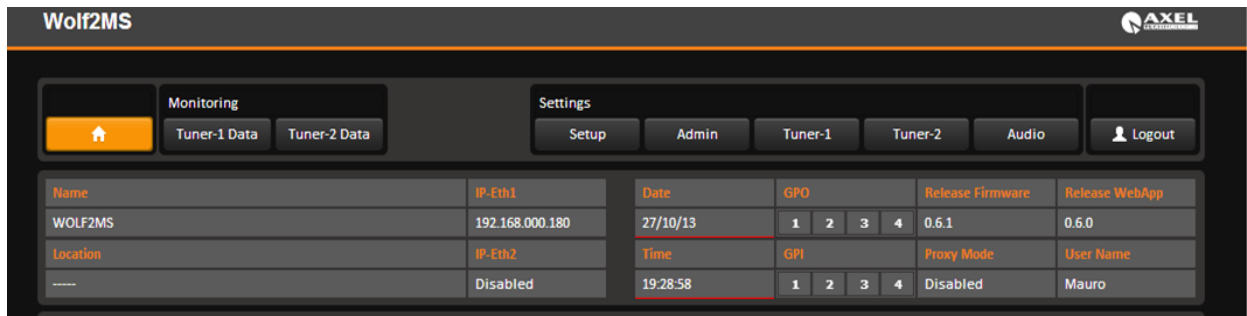

An NTP synchronization failure will be indicated with a red alarm line under the Date/Time field.

Description	Source	Time
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iNtpAlarmStatusNotify	192.168.0.180	2013-10-29 07:27:58
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-29 07:26:58
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PilotLowLevelAlarmStatusNotify	192.168.0.180	2013-10-29 07:22:21
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PilotLevelAlarmStatusNotify	192.168.0.180	2013-10-29 07:21:21
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2RfMpx.tuner2RfMpxPrefix.iTun2PilotLowLevelAlarmStatusNotify	192.168.0.180	2013-10-29 07:21:21
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2RfMpx.tuner2RfMpxPrefix.iTun2PilotLevelAlarmStatusNotify	192.168.0.180	2013-10-29 07:20:36

Source:	192.168.0.180	Timestamp:	11 minutes 31 seconds	SNMP Version:	2
Trap OID:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iNtpAlarmStatusNotify				
Variable Bindings:					
Name:	.iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0				
Value:	[TimeTicks] 11 minutes 31 seconds (69156)				
Name:	snmpTrapOID				
Value:	[OID] iNtpAlarmStatusNotify				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.generalSettings.timeSettings.iNtpAlarmStatus.0				
Value:	[Integer] alarm (1)				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0				
Value:	[OctetString] 2013-10-29 07:28:00				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0				
Value:	[Integer] 24				
Description:	"Ntp failure Notification Trap "				

Modified the behavior of the NTP client in the release 0.6.5. Peer Polling interval is set now as 4 (16 sec) in place of 3 (8 sec). If the timing adjustment is less than 5 seconds the sysclock will be adjusted in a slow continuous way (about 2 sec/hour) avoiding sysclocks jumps (very important for the streaming, will be documented in the manual) and the recommended synch period should be at least one per day

16.11 NORMAL ACTIVITY TRAP

This trap will be sent periodically to indicate that the system is OK and the Wolf2MS host process is able to communicate with all its interfaces without apparent problems.

One trap will be sent at every change of the time parameter or at the system start-up (few seconds after the cold start SNMP trap), as well as according to the period selected.

This Trap will not be replayed.

The screenshot shows the Wolf2MS configuration interface with the following sections:

- GENERAL SETUP**
- RDS DATA STREAM**
 - RDS Stream Setup: off
- ACTIVITY HEART SIGNAL**
 - Trap Dispatch Timing: 10
- SNMP SETTING**
 - Read Community: public
 - Write Community: private
- TIME AND NTP SETTINGS**
 - IP Address: 69.25.96.13
 - Auto Request Time
- SMTP SETTING**
 - Smtp Server Ip Address

The value "0" means function disabled. A different value indicates the period in minutes of the signal trap. In the example tested the period is 10 minutes.

Description	Source	Time
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 14:21:51
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 14:11:51
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 14:01:51
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 13:51:50
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 13:41:50
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 13:31:50
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 13:21:50
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 13:11:50
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-26 13:01:49
Source:	192.168.0.180	Timestamp: 2 hours 35 minutes 17 seconds
Trap OID:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	
Variable Bindings:		
Name:	.iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0	
Value:	[TimeTicks] 2 hours 35 minutes 17 seconds (931775)	
Name:	snmpTrapOID	
Value:	[OID] iActivityHeartNotify	
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0	
Value:	[OctetString] 2013-10-26 13:01:47	
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0	
Value:	[Integer] 59	
Description:	"Normal Activity Signal Trap "	

16.11.1 RF-L2 Monitor test (Tuner-1 Tuner-2)

An RF signal combined with one or more frequencies is applied to the tuner1 and/or tuner2 RF inputs. One carrier RF level will be varied to test the alarms the other ones will be used to fill the scanning list (for the scanning test only) . Frequencies of 100.80MHz (RF sweeping) and 100.50MHz (RF stable) will be used.

By slowly changing the RF levels (compatibly with the chosen Validation and Hold time) around the test zone, wait for the alarms and go back up to the starting point.

Tested is in Static mode first.

In static mode the alarm rises up after the validation time. When the status variable changes, a trap will be sent with time and RF values of the first sample out of the range. When the RF level is greater or equal to THR+ Hysteresis, the status alarm after the hold time comes back to the (ok) state and another trap will be sent with the RF value and time of the first valid sample.

The following values have been tested in static mode:

Thr: +30dBuV, Hyst: +3dBuV, Validation:2sec, Hold:2Sec

Thr: +30dBuV, Hyst: +3dBuV, Validation:20sec, Hold:10Sec

Thr: +30dBuV, Hyst: +3dBuV, Validation:180sec, Hold:60Sec

The observed behavior resulted to be compatible with the specifications with an accuracy error on the measure of about 1 dBuV and timing errors of about 1-2 seconds

Typical Accuracy and Precision expected in general:

Min RF value readable : -6 dBuV, Max RF value readable: +123 dBuV

Accuracy: +-3 dBuV, Precision +-2 dBuV (Range -6 dBuV to +19 dBuV)

Accuracy: +-2 dBuV, Precision +-1 dBuV (Range +20 dBuV to +79 dBuV)

Accuracy: +-3 dBuV, Precision +-3 dBuV (Range +80 dBuV to +123 dBuV)

Description	Source	Time
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RFmpx.tuner1RFmpxPrefix.iTun1RFlevelLow2AlarmStatusNotify	192.168.0.180	2013-10-26 10:32:07
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RFmpx.tuner1RFmpxPrefix.iTun1RFlevelLow2AlarmStatusNotify	192.168.0.180	2013-10-26 10:31:52
Source: 192.168.0.180 Timestamp: 5 minutes 24 seconds SNMP Version: 2 Trap OID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RFmpx.tuner1RFmpxPrefix.iTun1RFlevelLow2AlarmStatusNotify Variable Bindings:		
Name: .iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0 Value: [TimeTicks] 5 minutes 24 seconds (32401)		
Name: snmpTrapOID Value: [OID] iTun1RFlevelLow2AlarmStatusNotify		
Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1Freq.1 Value: [OctetString] 100.80		
Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1RFlevelVal.1 Value: [OctetString] 29.33		
Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqsEntry.aTun1RFlevelLow2TrapLabel.1 Value: [OctetString] Tun1 RF-L2 30 dBuV Thr (Chan1)		
Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.iTun1RFlevelLow2AlarmStatus.1 Value: [Integer] alarm (1)		
Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqsEntry.iTun1RFlevelLow2Mask.1 Value: [Integer] unmasked (0)		
Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0 Value: [OctetString] 2013-10-26 10:31:44		
Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0 Value: [Integer] 6		
Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1 Value: [Integer] 1		
Description: "Tun1RFlevelLow1AlarmStatus Notification Trap "		

Under the alarm condition the RF alarm led on the panel must be on (not flashing) and by clicking on the channel number of the correspondent tuner the RF error will be displayed. ("RF_LEV_L2")

In order to alternate the conditions, the system has been tested in scanning mode with another constant RF carrier at 70dBuV.

F1=100.80MHZ (40dBuV sweeping from 40dBuV to 20dBuV)

F2=100.50 MHZ (70dBuV stable)

Thr: +30dBuV, Hyst: +3dBuV, Validation:2sec, Hold:2Sec

Thr: +30dBuV, Hyst: +3dBuV, Validation:20sec, Hold:10Sec

Thr: +30dBuV, Hyst: +3dBuV, Validation:180sec, Hold:60Sec

The observed behavior resulted compatible with the specifications with an accuracy error on the measure of about 1 dBuV and timing errors of about 1-2 seconds

Wolf2MS													
Monitoring													
Settings													
Tuner-1													
GLOBAL													
RF_L2													
BLER													
PI													
PS													
TP													
TA													
CT													
RT													
AF													
EON													
IH													
TMC													
RT+													
ODA1													
ODA2													
TUNER1 - RADIO FREQUENCY LOW LEVEL 2													
Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Thr	Hysteresis	Validation	Hold	Mask	Email	Trap	Label
1	Channel 1 Under Test	-----	100.80 MHz	5 sec	unmasked	30.00 dBuV	3.00 dBuV	20 sec	10 sec	unmasked	disable	enable	Tun1 RF-L2 30 dBuV Thr (Chan1)
2	Channel 2 Under Test	-----	100.50 MHz	5 sec	unmasked	30.00 dBuV	3.00 dBuV	20 sec	10 sec	unmasked	disable	enable	Tun1 RF-L2 30 dBuV Thr (Chan2)
3	Channel 3 Under Test	-----	100.80 MHz	5 sec	unmasked	30.00 dBuV	3.00 dBuV	10 sec	5 sec	unmasked	disable	enable	Tun1 RF-L2 30 dBuV Thr (Chan3)
4	Channel 4 Under Test	-----	100.50 MHz	5 sec	unmasked	30.00 dBuV	3.00 dBuV	10 sec	5 sec	unmasked	disable	enable	Tun1 RF-L2 30 dBuV Thr (Chan4)

In scanning mode all traps will be sent in the same way but the validation and hold time must be calculated on the time the scanner is observing the channel.

TUNER-1

Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
1	100.80 MHz	Channel 1 Under Test	SCAN	ALARM	ALARM	ALARM	▼
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
2	100.50 MHz	Channel 2 Under Test	SCAN	ALARM	ALARM	ALARM	▼
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
3	100.80 MHz	Channel 3 Under Test	SCAN	ALARM	ALARM	ALARM	▲

Level		MPX	PI	BLER	
28.00	dBuV	84.34 kHz	5001	044	%
Carrier	M.Path	Audio	PS	TP	TA
-7 ppm	2 %	73.35 kHz	polli	OFF	ON
Adj-Chan		Pilot	M/S	AF	EON
-18.0 -16.0 dB		7.02 kHz	SPEECH	OK	OK
Alternative-Chan		RDS	CT	RT	RT+
-13.50 dB		3.97 kHz	---	OK	---
Peak-L		Peak-R	PTY	TMC	ODA-1
-0.92 dB		-2.56 dB	NO_PROG	---	---
RMS-L		RMS-R	DI	IH	ODA-2
-10.48 dB		-12.95 dB	MONO STATIC	---	---

Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
4	100.50 MHz	Channel 4 Under Test	SCAN	ALARM	ALARM	ALARM	▼
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
	---	---		ALARM	ALARM	ALARM	▼

The traps will be sent in the instant the alarm rises up, but the RF value and the time in the var-binds will be related to the first sample out of the range.

Under the alarm condition the RF alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and by clicking on the channel number of the correspondent tuner the RF error will be displayed. In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

In SmartScan Mode the behavior expected is the same of the normal Scanning mode because this parameter is continuous and always available on the channel.

REPLAY ENABLED TRAPS

The RF-L2 alarm trap is replayed with its original status, time and RF value. Trap Counter is normally incremented. All data and parameters are available in the MIB L3-5 to set and test this configuration.

16.11.2 RF-L1 Monitor test (Tuner-1 Tuner-2)

An RF combined signal with one or more frequencies are applied to the tuner1 and/or tuner2 RF inputs. One carrier RF level will be varied to test the alarms the other ones will be used to fill the scanning list. We have used 100.80MHz (RF sweeping) and 100.50MHz(RF stable).

By slowly changing the RF levels (compatibly with the chosen Validation and Hold time) around the test zone, wait for the alarms and go back up to the starting point.

Test is in Static mode first.

In static mode the alarm rises up after the validation time. When the status variable changes a trap will be sent with time and RF values of the first sample out of the range. When the RF level is greater or equal to THR+ Hysteresis, the status alarm after the hold time comes back to the (ok) state and another trap will be sent with the RF value and time of the first valid sample.

The following values have been tested in static mode:

Thr: +50dBuV, Hyst: +3dBuV, Validation:2sec, Hold:2Sec

Thr: +50dBuV, Hyst: +3dBuV, Validation:20sec, Hold:10Sec

Thr: +50dBuV, Hyst: +3dBuV, Validation:180sec, Hold:60Sec

The observed behavior resulted to be compatible with the specifications with an accuracy error on the measure of about 1 dBuV and timing errors of about 1-2 seconds

Typical Accuracy and Precision expected in general:

Min RF value readable : -6 dBuV, Max RF value readable: +123 dBuV

Accuracy: +-3 dBuV, Precision +-2 dBuV (Range -6 dBuV to +19 dBuV)

Accuracy: +-2 dBuV, Precision +-1 dBuV (Range +20 dBuV to +79 dBuV)

Accuracy: +-3 dBuV, Precision +-3 dBuV (Range +80 dBuV to +123 dBuV)

Under the alarm condition the RF alarm led on the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the RF error will be displayed. ("RF_LEV_L1")

Wolf2MS													
Monitoring													
Settings													
Tuner-1 Data Tuner-2 Data													
Setup Admin Tuner-1 Tuner-2 Audio Logout													
GLOBAL	RF _{L2}	RF _{L1}	RF _{H1}	RF _{H2}	DEV	PILOT _L	PILOT	RDS _L	RDS	AUDIO _{DEV}	AUDIO _L	AUDIO _R	
BLER	PI	PS	TP	TA	CT	RT	AF	EON	IH	TMC	RT ₁	ODA ₁	
ODA ₂													
TUNER1 - RADIO FREQUENCY LOW LEVEL 1													
Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Thr	Hysteresis	Validation	Hold	Mask	Email	Trap	Label
1	Channel 1 Under Test	-----	100.80 MHz	5 sec	unmasked	50.00 dBuV	3.00 dBuV	180 sec	60 sec	unmasked	disable	enable	Tun1 RF-L1 50 dBuV Thr (Chan1)
2	Channel 2 Under Test	-----	100.50 MHz	5 sec	unmasked	50.00 dBuV	3.00 dBuV	10 sec	5 sec	unmasked	disable	enable	Tun1 RF-L1 50 dBuV Thr (Chan2)
3	Channel 3 Under Test	-----	100.80 MHz	5 sec	unmasked	50.00 dBuV	5.00 dBuV	10 sec	5 sec	masked	disable	enable	Tun1 RF-L1 50 dBuV Thr (Chan3)
4	Channel 4 Under Test	-----	100.50 MHz	5 sec	unmasked	50.00 dBuV	5.00 dBuV	10 sec	5 sec	masked	disable	enable	Tun1 RF-L1 50 dBuV Thr (Chan4)

Tested in scanning mode with another carrier with a constant RF at 70dBuV to alternate the conditions.

F1=100.80MHZ (sweeping from 70dBuV to 40dBuV)

F2=100.50 MHZ (70dBuV stable)

Thr: +50dBuV, Hyst: +3dBuV, Validation:2sec, Hold:2Sec

Thr: +50dBuV, Hyst: +3dBuV, Validation:20sec, Hold:10Sec

Thr: +50dBuV, Hyst: +3dBuV, Validation:180sec, Hold:60Sec

The behavior observed has been compatible with the definition with an accuracy error on the measure of about 1 dBuV and timing errors of about 1-2 seconds

Description	Source	Time
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RFmpx.tuner1RFmpxPrefix.iTun1RFlevelLow1AlarmStatusNotify	192.168.0.180	2013-10-30 12:37:40
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-30 12:36:29
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RFmpx.tuner1RFmpxPrefix.iTun1RFlevelLow1AlarmStatusNotify	192.168.0.180	2013-10-30 12:36:22

Source:	192.168.0.180	Timestamp:	4 hours 40 minutes 26 seconds	SNMP Version:	2
Trap OID:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RFmpx.tuner1RFmpxPrefix.iTun1RFlevelLow1AlarmStatusNotify				
Variable Bindings:					
Name:	iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0				
Value:	[TimeTicks] 4 hours 40 minutes 26 seconds (1682651)				
Name:	snmpTrapOID				
Value:	[OID] iTun1RFlevelLow1AlarmStatusNotify				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1Freq.1				
Value:	[OctetString] 100.80				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1RFlevelVal.1				
Value:	[OctetString] 48.25				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqsEntry.aTun1RFlevelLow1TrapLabel.1				
Value:	[OctetString] Tun1 RF-L1 50 dBuv Thr (Chan1)				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.iTun1RFlevelLow1AlarmStatus.1				
Value:	[Integer] alarm (1)				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqsEntry.iTun1RFlevelLow1Mask.1				
Value:	[Integer] unmasked (0)				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0				
Value:	[OctetString] 2013-10-30 12:33:23				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0				
Value:	[Integer] 40				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1				
Value:	[Integer] 1				
Description: "Tun1RFlevelLow1AlarmStatus Notification Trap "					

The traps will be sent if the instant the alarm rises up, but the RF value and the time in the var-binds will be related to the first sample out of the range.

Under the alarm condition the RF alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the RF error will be displayed. In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

In SmartScan Mode the behavior expected is the same of the normal Scanning mode because this parameter is continuous and always available on the channel.

REPLAY ENABLED TRAPS

The RF-L1 alarm trap is replayed with its original status, time and RF value. Trap Counter is normally incremented. All data and parameters are available in the MIB L3-5 to set and test this configuration.

16.11.3 RF-H1 Monitor test (Tuner-1 Tuner-2)

An RF combined signal with one or more frequencies are applied to the tuner1 and/or tuner2 RF inputs. One carrier RF level will be varied to test the alarms the other ones will be used to fill the scanning list. We have used 100.80MHz (RF sweeping) and 100.50MHz (RF stable).

By slowly changing the the RF levels (in compatible way with the Validation and Hold time chosen) around the test zone, wait for the alarms and go back up to the starting point.

Tested in Static mode first.

In static mode the alarm rises up after the validation time, a trap will be sent when the status variable changes but with the time and the RF value of the first sample out of the range. When the RF level is lower or equal to THR- Hysteresis, the status alarm after the hold time comes back to the (ok) state and another trap will be sent with the RF value and the time of the first valid sample.

We have tested in static mode with the following values:

Thr: +80dBuV, Hyst: +3dBuV, Validation:2sec, Hold:2Sec

Thr: +80dBuV, Hyst: +3dBuV, Validation:20sec, Hold:10Sec

Thr: +80dBuV, Hyst: +3dBuV, Validation:180sec, Hold:60Sec

The behavior observed has been compatible with the definition with an accuracy error on the measure of about 2 dBuV and timing errors of about 1-2 seconds

Typical Accuracy and Precision expected in general:

Min RF value readable : -6 dBuV, Max RF value readable: +123 dBuV

Accuracy: +-3 dBuV, Precision +-2 dBuV (Range -6 dBuV to +19 dBuV)

Accuracy: +-2 dBuV, Precision +-1 dBuV (Range +20 dBuV to +79 dBuV)

Accuracy: +-3 dBuV, Precision +-3 dBuV (Range +80 dBuV to +123 dBuV)

The screenshot shows the Wolf2MS monitoring interface. At the top, there's a navigation bar with 'Monitoring' and 'Settings' tabs. Under 'Monitoring', there are sub-tabs for 'Tuner-1 Data' and 'Tuner-2 Data'. The 'Tuner-1' sub-tab is selected. Below this, there's a grid of buttons for various parameters: GLOBAL, RF L2, RF L1, RF H1 (highlighted), RF H2, DEV, PILOT1, PILOT, RDS1, RDS, AUDIO DEV, AUDIO L, AUDIO R, BLER, PI, PS, TP, TA, CT, RT, AF, EON, JH, TMC, RT, ODA1, and ODA2. Below the grid, there's a section titled 'TUNER1 - RADIO FREQUENCY HIGH LEVEL 1' which contains a table with 13 columns: Chan, Chan Label, Preset, Frequency, Scan Time, Chan Mask, Thr, Hysteresis, Validation, Hold, Mask, Email, Trap, and Label. The table has 4 rows of data, all showing 'Channel 1 Under Test' at 100.80 MHz with a 5-second scan time. The 'Thr' is 80.00 dBuV, 'Hysteresis' is 3.00 dBuV, 'Validation' is 20 sec, and 'Hold' is 10 sec. The 'Label' column shows 'Tun1 RF-H1 80 dBuV Thr (Chan1)' for the first row and similar for the others.

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Thr	Hysteresis	Validation	Hold	Mask	Email	Trap	Label
1	Channel 1 Under Test	----	100.80 MHz	5 sec	unmasked	80.00 dBuV	3.00 dBuV	20 sec	10 sec	unmasked	disable	enable	Tun1 RF-H1 80 dBuV Thr (Chan1)
2	Channel 2 Under Test	-----	100.50 MHz	5 sec	unmasked	80.00 dBuV	3.00 dBuV	20 sec	10 sec	unmasked	disable	enable	Tun1 RF-H1 80 dBuV Thr (Chan1)
3	Channel 3 Under Test	-----	100.80 MHz	5 sec	unmasked	80.00 dBuV	3.00 dBuV	20 sec	10 sec	unmasked	disable	enable	Tun1 RF-H1 80 dBuV Thr (Chan3)
4	Channel 4 Under Test	-----	100.50 MHz	5 sec	unmasked	80.00 dBuV	3.00 dBuV	20 sec	10 sec	unmasked	disable	enable	Tun1 RF-H1 80 dBuV Thr (Chan4)

Under the alarm condition the RF alarm led on the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the RF error will be displayed. ("RF_LEV_H1")

Description	Source	Time
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RFmpx.tuner1RFmpxPrefix.iTun1RFlevelHigh1AlarmStatusNotify	192.168.0.180	2013-10-30 15:33:41
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-30 15:26:28
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-30 15:16:28
Source: 192.168.0.180 Timestamp: 7 hours 37 minutes 45 seconds SNMP Version: 2		
Trap OID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RFmpx.tuner1RFmpxPrefix.iTun1RFlevelHigh1AlarmStatusNotify		
Variable Bindings:		
Name: iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0 Value: [TimeTicks] 7 hours 37 minutes 45 seconds (2746546)		
Name: snmpTrapOID Value: [OID] iTun1RFlevelHigh1AlarmStatusNotify		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.ftun1Freq.1 Value: [OctetString] 100.80		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.ftun1RFlevelVal.1 Value: [OctetString] 82.87		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqsEntry.aTun1RFlevelHigh1TrapLabel.1 Value: [OctetString] Tun1 RF-H1 80 dBuV Thr (Chan1)		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.iTun1RFlevelHigh1AlarmStatus.1 Value: [Integer] alarm (1)		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqsEntry.iTun1RFlevelHigh1Mask.1 Value: [Integer] unmasked (0)		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDate.0 Value: [OctetString] 2013-10-30 15:33:22		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0 Value: [Integer] 83		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1 Value: [Integer] 1		

Tested in scanning mode with another carrier with a constant RF at 70dBuV to alternate the conditions.

F1=100.80MHZ (sweeping from 90dBuV to 60dBuV)

F2=100.50 MHZ (70dBuV stable)

Thr: +80dBuV, Hyst: +3dBuV, Validation:2sec, Hold:2Sec

Thr: +80dBuV, Hyst: +3dBuV, Validation:20sec, Hold:10Sec

Thr: +80dBuV, Hyst: +3dBuV, Validation:180sec, Hold:60Sec

The behavior observed has been compatible with the definition with an accuracy error on the measure of about 2 dBuV and timing errors of about 1-2 seconds

The traps will be sent if the instant the alarm rises up, but the RF value and the time in the var-binds will be related to the first sample out of the range.

Under the alarm condition the RF alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the RF error will be displayed.

In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

In SmartScan Mode the behavior expected is the same of the normal Scanning mode because this parameter is continuous and always available on the channel.

REPLAY ENABLED TRAPS

The RF-H1 alarm trap is replayed with its original status, time and RF value. Trap Counter is normally incremented. All data and parameters are available in the MIB L3-4 to set and test this configuration.

NOTES

Over 80dBuV the internal full band automatic attenuator starts to attenuate with a control hysteresis of 2 dBuV. This causes two effects : 1) less measurement accuracy (as specified) and less sensitivity for lower carrier on other frequencies

16.11.4 RF-H2 Monitor test (Tuner-1 Tuner-2)

An RF combined signal with one or more frequencies are applied to the tuner1 and/or tuner2 RF inputs. One carrier RF level will be varied to test the alarms the other ones will be used to fill the scanning list. We have used 100.80MHz (RF sweeping) and 100.50MHz(RF stable).

By slowly changing the the RF levels (in compatible way with the Validation and Hold time chosen) around the test zone, wait for the alarms and go back up to the starting point.

Tested in Static mode first.

In static mode the alarm rises up after the validation time, a trap will be sent when the status variable changes but with the time and the RF value of the first sample out of the range. When the RF level is lower or equal to THR- Hysteresis, the status alarm after the hold time comes back to the (ok) state and another trap will be sent with the RF value and the time of the first valid sample.

We have tested in static mode with the following values:

Thr: +110dBuV, Hyst: +3dBuV, Validation:2sec, Hold:2Sec

Thr: +110dBuV, Hyst: +3dBuV, Validation:20sec, Hold:10Sec

Thr: +110dBuV, Hyst: +3dBuV, Validation:180sec, Hold:60Sec

The behavior observed has been compatible with the definition with an accuracy error on the measure of about 2 dBuV and timing errors of about 1-2 seconds

Typical Accuracy and Precision expected in general:

Min RF value readable : -6 dBuV, Max RF value readable: +123 dBuV

Accuracy: +3 dBuV, Precision +2 dBuV (Range -6 dBuV to +19 dBuV)

Accuracy: +2 dBuV, Precision +1 dBuV (Range +20 dBuV to +79 dBuV)

Accuracy: +3 dBuV, Precision +3 dBuV (Range +80 dBuV to +123 dBuV)

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Thr	Hysteresis	Validation	Hold	Mask	Email	Trap	Label
1	Channel 1 Under Test	-----	100.80 MHz	5 sec	unmasked	110.00 dBuV	3.00 dBuV	20 sec	10 sec	unmasked	disable	enable	Tun1 RF-H2 110 dBuV Thr (Chan1)
2	Channel 2 Under Test	-----	100.50 MHz	5 sec	unmasked	110.00 dBuV	3.00 dBuV	20 sec	10 sec	unmasked	disable	enable	Tun1 RF-H2 110 dBuV Thr (Chan2)
3	Channel 3 Under Test	-----	100.80 MHz	5 sec	unmasked	110.00 dBuV	3.00 dBuV	20 sec	10 sec	unmasked	disable	enable	Tun1 RF-H2 110 dBuV Thr (Chan3)
4	Channel 4 Under Test	-----	100.50 MHz	5 sec	unmasked	110.00 dBuV	3.00 dBuV	20 sec	10 sec	unmasked	disable	enable	Tun1 RF-H2 110 dBuV Thr (Chan4)

Under the alarm condition the RF alarm led on the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the RF error will be displayed. ("RF_LEV_H2")

Description	Source	Time
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RMpx.tuner1RMpxPrefix.iTun1RFlevelHigh1AlarmStatusNotify	192.168.0.180	2013-10-30 16:08:30
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RMpx.tuner1RMpxPrefix.iTun1RFlevelHigh1AlarmStatusNotify	192.168.0.180	2013-10-30 16:08:19
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-10-30 16:06:29
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RMpx.tuner1RMpxPrefix.iTun1RFlevelHigh2AlarmStatusNotify	192.168.0.180	2013-10-30 16:06:09
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RMpx.tuner1RMpxPrefix.iTun1RFlevelHigh2AlarmStatusNotify	192.168.0.180	2013-10-30 16:05:59
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanPiStatusNotify	192.168.0.180	2013-10-30 16:02:31
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RMpx.tuner1RMpxPrefix.iTun1RFlevelHigh2AlarmStatusNotify	192.168.0.180	2013-10-30 15:59:42
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RMpx.tuner1RMpxPrefix.iTun1RFlevelHigh2AlarmStatusNotify	192.168.0.180	2013-10-30 15:59:32
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanPiStatusNotify	192.168.0.180	2013-10-30 15:59:31
Source: 192.168.0.180 Timestamp: 8 hours 10 minutes 14 seconds SNMP Version: 2		
Trap OID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RMpx.tuner1RMpxPrefix.iTun1RFlevelHigh2AlarmStatusNotify		
Variable Bindings:		
Name: iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0 Value: [TimeTicks] 8 hours 10 minutes 14 seconds (2941444)		
Name: snmpTrapOID Value: [OID] iTun1RFlevelHigh2AlarmStatusNotify		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.ftun1Freq.1 Value: [OctetString] 100.80		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.ftun1RFlevelVal.1 Value: [OctetString] 94.00		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqEntry.aTun1RFlevelHigh2TrapLabel.1 Value: [OctetString] Tun1 RF-H2 110 dBuV Thr (Chan1)		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.iTun1RFlevelHigh2AlarmStatus.1 Value: [Integer] ok (0)		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqEntry.iTun1RFlevelHigh2Mask.1 Value: [Integer] unmasked (0)		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0 Value: [OctetString] 2013-10-30 16:05:48		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0 Value: [Integer] 96		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1 Value: [Integer] 1		

Tested in scanning mode with another carrier with a constant RF at 70dBuV to alternate the conditions.

F1=100.80MHZ (sweeping from 120dBuV to 100dBuV)

F2=100.50 MHZ (70dBuV stable)

Thr: +110dBuV, Hyst: +3dBuV, Validation:2sec, Hold:2Sec

Thr: +110dBuV, Hyst: +3dBuV, Validation:20sec, Hold:10Sec

Thr: +110dBuV, Hyst: +3dBuV, Validation:180sec, Hold:60Sec

The behavior observed has been compatible with the specification with an accuracy error on the measure of about 2 dBuV and timing errors of about 1-2 seconds

The traps will be sent if the instant the alarm rises up, but the RF value and the time in the var-binds will be related to the first sample out of the range.

Under the alarm condition the RF alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the RF error will be displayed.

In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

In SmartScan Mode the behavior expected is the same of the normal Scanning mode because this parameter is continuous and always available on the channel.

REPLAY ENABLED TRAPS

The RF-H2 alarm trap is replayed with its original status, time and RF value. Trap Counter is normally incremented. All data and parameters are available in the MIB L3-5 to set and test this configuration.

PLANNED IMPROVEMENTS

Sample of the RF Carrier Offset after its stabilization in the channel change transient (already improved for the 0.6.3 release).

Add in the panel display even the out of range RF value in the list error sequence after the alarm label "RF_LEV_H2"

NOTES

over 80dBuV the internal full band automatic attenuator starts to attenuate with a control hysteresis of 2 dBuV. This causes two effects : 1) less measurement accuracy (as specified) and less sensitivity for lower carrier on other frequencies

16.11.5 Frequency Deviation Test (Tuner-1 Tuner-2)

An RF combined signal with one or more frequencies are applied to the tuner1 and/or tuner2 RF inputs. One carrier the pilot level will be varied to test the alarms the other ones will be used to fill the scanning list with a stable pilot level. We have used for scanning test 100.80MHz (Pilot sweeping) and 100.50MHz(Pilot stable), RF level >70dBuV.

By slowly changing the Pilot (in compatible way with the Validation and Hold time chosen) around the test zone, wait for the alarms and go back up to the starting point.

Tested in Static mode first.

In static mode the alarm rises up after the validation time, a trap will be sent when the status variable changes but with the time and the Pilot value of the first sample out of the range. When the Pilot level comes back to the (ok) state another trap will be sent with the Pilot value and the time of the first sample valid.

We have tested in static mode with the following values:

Tested first as "multilevel alarm": PilotLow=Failure and PilotWindow=Out of Nominal Zone ;

PilotLowThr:5.0kHz, PilotThrMin:6.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:2sec, Hold:2Sec
 PilotLowThr:5.0kHz, PilotThrMin:6.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:20sec, Hold:10Sec
 PilotLowThr:5.0kHz, PilotThrMin:6.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:180sec, Hold:60Sec

Tested then as: PilotLow=LowThr and PilotWindow=MaxThr;

PilotLowThr:6.0kHz, PilotThrMin:0.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:2sec, Hold:2Sec
 PilotLowThr:6.0kHz, PilotThrMin:0.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:20sec, Hold:10Sec
 PilotLowThr:6.0kHz, PilotThrMin:0.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:180sec, Hold:60Sec

The behavior observed in dynamic nominal conditions (75kHz deviation, Mid audio compression/power, varied audio contents) has been compatible with the specifications with an accuracy error on the measure of about +- 0.1 kHz and timing errors of about 1-2 seconds.

Typical Accuracy expected in general (RF Level > 70dBuV):

Min Pilot Level value readable : +0.3 kHz, Max Pilot level value readable: +10.0 kHz

Accuracy: +-0.2 kHz (Mid mpx power, Dev<80Khz, TDF default, see Notes)

Accuracy: -0.1kHz +0.3kHz, (High mpx power, Dev>100Khz, see Notes)

Accuracy: +-0.2 kHz , (Low mpx power, Dev<80Khz, MB default, see Notes)

TUNER1 - PILOT OPERATIVE WINDOW ZONE														
Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Min. Thr	Max. Thr	Hysteresis	Validation	Hold	Mask	Email	Trap	Label
1	Channel 1 Under Test	-----	100.80 MHz	5 sec	unmasked	6.00 kHz	7.00 kHz	0.30 kHz	20 sec	10 sec	unmasked	disable	enable	Tun1 Pilot 6.00-7.00 Khz Thr (Chan1)
2	Channel 2 Under Test	-----	100.50 MHz	5 sec	unmasked	6.00 kHz	7.00 kHz	0.30 kHz	20 sec	10 sec	unmasked	disable	enable	Tun1 Pilot 6.00-7.00 Khz Thr (Chan2)
3	Channel 3 Under Test	-----	100.80 MHz	5 sec	unmasked	6.00 kHz	7.00 kHz	0.30 kHz	20 sec	10 sec	unmasked	disable	disable	Tun1 Pilot 6.00-7.00 Khz Thr (Chan3)
4	Channel 4 Under Test	-----	100.50 MHz	5 sec	unmasked	6.00 kHz	7.00 kHz	0.30 kHz	20 sec	10 sec	unmasked	disable	disable	Tun1 Pilot 6.00-7.00 Khz Thr (Chan4)

TUNER1 - PILOT LOW LEVEL													
Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Thr	Hysteresis	Validation	Hold	Mask	Email	Trap	Label
1	Channel 1 Under Test	-----	100.80 MHz	5 sec	unmasked	5.00 kHz	0.30 kHz	20 sec	10 sec	unmasked	disable	enable	Tun1 Pilot Low 5.00 KHz Thr (Chan1)
2	Channel 2 Under Test	-----	100.50 MHz	5 sec	unmasked	5.00 kHz	0.30 kHz	20 sec	2 sec	unmasked	disable	enable	Tun1 Pilot Low 5.00 KHz Thr (Chan2)
3	Channel 3 Under Test	-----	100.80 MHz	5 sec	unmasked	5.00 kHz	0.30 kHz	2 sec	2 sec	masked	disable	disable	Tun1 Pilot Low 5.00 KHz Thr (Chan3)
4	Channel 4 Under Test	-----	100.50 MHz	5 sec	unmasked	5.00 kHz	0.30 kHz	2 sec	2 sec	masked	disable	disable	Tun1 Pilot Low 5.00 KHz Thr (Chan4)

Operations Tools

Description	Source	Time
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PilotLevelAlarmStatusNotify	192.168.0.180	2013-10-31 13:08:05
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PilotLowLevelAlarmStatusNotify	192.168.0.180	2013-10-31 13:07:17
trapOID: .1.3.6.1.6.3.1.1.5.1	192.168.0.180	2013-10-31 13:05:54

Source:	192.168.0.180	Timestamp:	1 minute 44 seconds	SNMP Version:	2
Trap OID:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PilotLowLevelAlarmStatusNotify				
Variable Bindings:					
Name:	iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0				
Value:	[TimeTicks] 1 minute 44 seconds (10435)				
Name:	snmpTrapOID				
Value:	[OID] iTun1PilotLowLevelAlarmStatusNotify				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1Freq.1				
Value:	[OctetString] 100.80				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1PilotLevelVal.1				
Value:	[OctetString] 4.81				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqEntry.aTun1PilotLowLevelTrapLabel.1				
Value:	[OctetString] Tun1 Pilot Low 5.00 KHz Thr (Chan1)				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.iTun1PilotLowLevelAlarmStatus.1				
Value:	[Integer] alarm (1)				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqEntry.iTun1PilotLowLevelMask.1				
Value:	[Integer] unmasked (0)				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0				
Value:	[OctetString] 2013-10-31 13:07:00				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0				
Value:	[Integer] 2				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1				
Value:	[Integer] 1				
Description: "iTun1PilotLowLevelAlarmStatusNotify Notification Trap "					

Description	Source	Time
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PilotLevelAlarmStatusNotify	192.168.0.180	2013-10-31 13:23:49
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PilotLevelAlarmStatusNotify	192.168.0.180	2013-10-31 13:23:49
trapOID: .1.3.6.1.6.3.1.1.5.1	192.168.0.180	2013-10-31 13:23:00
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PilotLevelAlarmStatusNotify	192.168.0.180	2013-10-31 13:08:05
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PilotLevelAlarmStatusNotify	192.168.0.180	2013-10-31 13:07:17
trapOID: .1.3.6.1.6.3.1.1.5.1	192.168.0.180	2013-10-31 13:05:54

Source:	192.168.0.180	Timestamp:	18 minutes 16 seconds	SNMP Version:	2
Trap OID:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PilotLevelAlarmStatusNotify				
Variable Bindings:					
Name:	iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0				
Value:	[TimeTicks] 18 minutes 16 seconds (109626)				
Name:	snmpTrapOID				
Value:	[OID] iTun1PilotLevelAlarmStatusNotify				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1Freq.1				
Value:	[OctetString] 100.80				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1PilotLevelVal.1				
Value:	[OctetString] 4.53				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqEntry.aTun1PilotLevelTrapLabel.1				
Value:	[OctetString] Tun1 Pilot 6.00-7.00 KHz Thr (Chan1)				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.iTun1PilotLevelAlarmStatus.1				
Value:	[Integer] alarm (1)				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqEntry.iTun1PilotLevelMask.1				
Value:	[Integer] unmasked (0)				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0				
Value:	[OctetString] 2013-10-31 13:23:32				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0				
Value:	[Integer] 2				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1				
Value:	[Integer] 1				
Description:	"iTun1PilotLevelStatusNotify Notification Trap "				

Under the alarm condition the MPX alarm led on the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the MPX error will be displayed. ("PILOT_LEV")

Tested in scanning mode with another carrier to alternate the conditions.

F1=100.80MHZ (Pilot sweeping from 4 kHz to 8kHz)

F2=100.50 MHZ (6.5 kHz stable)

Tested first as "multilevel alarm": PilotLow=Failure and PilotWindow=Out of Nominal Zone ;

PilotLowThr:5.0kHz, PilotThrMin:6.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:2sec, Hold:2Sec

PilotLowThr:5.0kHz, PilotThrMin:6.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:20sec, Hold:10Sec

PilotLowThr:5.0kHz, PilotThrMin:6.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:180sec, Hold:60Sec

Tested then as: PilotLow=LowThr and PilotWindow=MaxThr;

PilotLowThr:6.0kHz, PilotThrMin:0.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:2sec, Hold:2Sec

PilotLowThr:6.0kHz, PilotThrMin:0.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:20sec, Hold:10Sec

PilotLowThr:6.0kHz, PilotThrMin:0.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:180sec, Hold:60Sec

The behavior observed has been compatible with the specifications with the same static case accuracy error

Wolf2MS

Monitoring: Tuner-1 Data, Tuner-2 Data

Settings: Setup, Admin, Tuner-1, Tuner-2, Audio, Logout

GLOBAL: RF_{L2}, RF_{L1}, RF_{H1}, RF_{H2}, DEV, PILOT_L, PILOT, RDS_L, RDS, AUDIO_{DEV}, AUDIO_L, AUDIO_R

BLER: PI, PS, TP, TA, CT, RT, AF, EON, IH, TMC, RT₊, ODA₁

ODA₂

TUNER1 - RADIO FREQUENCY LOW LEVEL 2

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Thr	Hysteresis	Validation	Hold	Mask	Email	Trap	Label
1	Channel 1 Under Test	-----	100.80 MHz	5 sec	unmasked	30.00 dBuV	3.00 dBuV	20 sec	10 sec	unmasked	disable	enable	Tun1 RF-L2 30 dBuV Thr (Chan1)
2	Channel 2 Under Test	-----	100.50 MHz	5 sec	unmasked	30.00 dBuV	3.00 dBuV	20 sec	10 sec	unmasked	disable	enable	Tun1 RF-L2 30 dBuV Thr (Chan2)
3	Channel 3 Under Test	-----	100.80 MHz	5 sec	unmasked	30.00 dBuV	3.00 dBuV	10 sec	5 sec	unmasked	disable	enable	Tun1 RF-L2 30 dBuV Thr (Chan3)
4	Channel 4 Under Test	-----	100.50 MHz	5 sec	unmasked	30.00 dBuV	3.00 dBuV	10 sec	5 sec	unmasked	disable	enable	Tun1 RF-L2 30 dBuV Thr (Chan4)

In scanning mode all traps will be sent in the same way but the validation and hold time must be calculated on the time the scanner is observing the channel.

TUNER-1

Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
1	100.80 MHz	Channel 1 Under Test	SCAN	ALARM	ALARM	ALARM	↑
				Level	MPX	PI	BLER
				74.00 dBuV	57.60 kHz	5001	000 %
				Carrier	MPath	Audio	PS
				0 ppm	0 %	47.38 kHz	polle
				Adj-Chan	Pilot	M/S	OFF
				-37.0 -38.0 dB	7.22 kHz	AF	ON
				Alternative-Chan	RDS	CT	EON
				-69.00 dB	3.00 kHz	OK	OK
				Peak-L	Peak-R	PTV	TMC
				-1.24 dB	-1.11 dB	NO_PROG	ODA-1
				RMS-L	RMS-R	DI	ODA-2
				-11.77 dB	-10.14 dB	MONO STATIC	---
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
2	100.50 MHz	Channel 2 Under Test	SCAN	ALARM	ALARM	ALARM	↓
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
3	100.80 MHz	Channel 3 Under Test	SCAN	ALARM	ALARM	ALARM	↓
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
4	100.50 MHz	Channel 4 Under Test	SCAN	ALARM	ALARM	ALARM	↓
Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	

The traps will be sent if the instant the alarm rises up, but the Pilot Level value and the time in the var-binds will be related to the first sample out of the range.

Under the alarm condition the MPX alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the MPX error will be displayed. In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

In SmartScan Mode the behavior expected is the same of the normal Scanning mode because this parameter is continuous and always available on the channel.

REPLAY ENABLED TRAPS

The PILOT LEVEL alarm trap is replayed with its original status, time and value. Trap Counter is normally incremented. All data and parameters are available in the MIB L3-5 to set and test this configuration.

PLANNED IMPROVEMENTS

Add in the panel display even the out of range Pilot Level value in the list error sequence after the alarm label "PILOT_LEV"

NOTES

Noticed (as already measured and documented by MB) a dependence of the measure from the deviation/power of the signal. With strong audio compression (over 6.0 dBitubs412) or very high deviation (over 100kHz) the error range can be : -0.1kHz to +0.3kHz

Testing under low mpx power conditions and normal deviation(power less than 1 dBitubs412, deviation less than 80kHz) , the loss of precision caused from the deviation/power dependence is typically less than 0.1kHz.

16.11.6 Pilot Level – Low and Windows combined Test (Tuner-1 Tuner-2)

An RF combined signal with one or more frequencies are applied to the tuner1 and/or tuner2 RF inputs. One carrier the pilot level will be varied to test the alarms the other ones will be used to fill the scanning list with a stable pilot level. We have used for scanning test 100.80MHz (Pilot sweeping) and 100.50MHz(Pilot stable), RF level >70dBuV.

By slowly changing the Pilot (in compatible way with the Validation and Hold time chosen) around the test zone, wait for the alarms and go back up to the starting point.

Tested in Static mode first.

In static mode the alarm rises up after the validation time, a trap will be sent when the status variable changes but with the time and the Pilot value of the first sample out of the range. When the Pilot level comes back to the (ok) state another trap will be sent with the Pilot value and the time of the first sample valid.

We have tested in static mode with the following values:

Tested first as "multilevel alarm": PilotLow=Failure and PilotWindow=Out of Nominal Zone ;

PilotLowThr:5.0kHz, PilotThrMin:6.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:2sec, Hold:2Sec
 PilotLowThr:5.0kHz, PilotThrMin:6.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:20sec, Hold:10Sec
 PilotLowThr:5.0kHz, PilotThrMin:6.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:180sec, Hold:60Sec

Tested then as: PilotLow=LowThr and PilotWindow=MaxThr;

PilotLowThr:6.0kHz, PilotThrMin:0.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:2sec, Hold:2Sec
 PilotLowThr:6.0kHz, PilotThrMin:0.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:20sec, Hold:10Sec
 PilotLowThr:6.0kHz, PilotThrMin:0.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:180sec, Hold:60Sec

The behavior observed in dynamic nominal conditions (75kHz deviation, Mid audio compression/power, varied audio contents) has been compatible with the specifications with an accuracy error on the measure of about +- 0.1 kHz and timing errors of about 1-2 seconds.

Typical Accuracy expected in general (RF Level > 70dBuV):

Min Pilot Level value readable : +0.3 kHz, Max Pilot level value readable: +10.0 kHz

Accuracy: +-0.2 kHz (Mid mpx power, Dev<80Khz, TDF default, see Notes)

Accuracy: -0.1kHz +0.3kHz, (High mpx power, Dev>100Khz, see Notes)

Accuracy: +-0.2 kHz , (Low mpx power, Dev<80Khz, MB default, see Notes)

TUNER1 - PILOT OPERATIVE WINDOW ZONE														
Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Min. Thr	Max. Thr	Hysteresis	Validation	Hold	Mask	Email	Trap	Label
1	Channel 1 Under Test	-----	100.80 MHz	5 sec	unmasked	6.00 kHz	7.00 kHz	0.30 kHz	20 sec	10 sec	unmasked	disable	enable	Tun1 Pilot 6.00-7.00 Khz Thr (Chan1)
2	Channel 2 Under Test	-----	100.50 MHz	5 sec	unmasked	6.00 kHz	7.00 kHz	0.30 kHz	20 sec	10 sec	unmasked	disable	enable	Tun1 Pilot 6.00-7.00 Khz Thr (Chan2)
3	Channel 3 Under Test	-----	100.80 MHz	5 sec	unmasked	6.00 kHz	7.00 kHz	0.30 kHz	20 sec	10 sec	unmasked	disable	disable	Tun1 Pilot 6.00-7.00 Khz Thr (Chan3)
4	Channel 4 Under Test	-----	100.50 MHz	5 sec	unmasked	6.00 kHz	7.00 kHz	0.30 kHz	20 sec	10 sec	unmasked	disable	disable	Tun1 Pilot 6.00-7.00 Khz Thr (Chan4)

TUNER1 - PILOT LOW LEVEL													
Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Thr	Hysteresis	Validation	Hold	Mask	Email	Trap	Label
1	Channel 1 Under Test	-----	100.80 MHz	5 sec	unmasked	5.00 kHz	0.30 kHz	20 sec	10 sec	unmasked	disable	enable	Tun1 Pilot Low 5.00 KHz Thr (Chan1)
2	Channel 2 Under Test	-----	100.50 MHz	5 sec	unmasked	5.00 kHz	0.30 kHz	20 sec	2 sec	unmasked	disable	enable	Tun1 Pilot Low 5.00 KHz Thr (Chan2)
3	Channel 3 Under Test	-----	100.80 MHz	5 sec	unmasked	5.00 kHz	0.30 kHz	2 sec	2 sec	masked	disable	disable	Tun1 Pilot Low 5.00 KHz Thr (Chan3)
4	Channel 4 Under Test	-----	100.50 MHz	5 sec	unmasked	5.00 kHz	0.30 kHz	2 sec	2 sec	masked	disable	disable	Tun1 Pilot Low 5.00 KHz Thr (Chan4)

Operations

Tools

Description	Source	Time
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PilotLevelAlarmStatusNotify	192.168.0.180	2013-10-31 13:08:05
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PilotLowLevelAlarmStatusNotify	192.168.0.180	2013-10-31 13:07:17
trapOID: .1.3.6.1.6.3.1.1.5.1	192.168.0.180	2013-10-31 13:05:54

Description	Source	Time
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PilotLevelAlarmStatusNotify	192.168.0.180	2013-10-31 13:23:49
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PilotLevelAlarmStatusNotify	192.168.0.180	2013-10-31 13:23:49
trapOID: .1.3.6.1.6.3.1.1.5.1	192.168.0.180	2013-10-31 13:23:00
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PilotLevelAlarmStatusNotify	192.168.0.180	2013-10-31 13:08:05
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PilotLevelAlarmStatusNotify	192.168.0.180	2013-10-31 13:07:17
trapOID: .1.3.6.1.6.3.1.1.5.1	192.168.0.180	2013-10-31 13:05:54

Source:	192.168.0.180	Timestamp:	18 minutes 16 seconds	SNMP Version:	2
Trap OID:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1PilotLevelAlarmStatusNotify				
Variable Bindings:					
Name:	iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0				
Value:	[TimeTicks] 18 minutes 16 seconds (109626)				
Name:	snmpTrapOID				
Value:	[OID] iTun1PilotLevelAlarmStatusNotify				

Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1Freq.1				
Value:	[OctetString] 100.80				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1PilotLevelVal.1				
Value:	[OctetString] 4.53				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqEntry.aTun1PilotLevelTrapLabel.1				
Value:	[OctetString] Tun1 Pilot 6.00-7.00 KHz Thr (Chan1)				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.iTun1PilotLevelAlarmStatus.1				
Value:	[Integer] alarm (1)				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqEntry.iTun1PilotLevelMask.1				
Value:	[Integer] unmasked (0)				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0				
Value:	[OctetString] 2013-10-31 13:23:32				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0				
Value:	[Integer] 2				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1				
Value:	[Integer] 1				
Description:	"iTun1PilotLevelStatusNotify Notification Trap "				

Under the alarm condition the MPX alarm led on the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the MPX error will be displayed. ("PILOT_LEV")

Tested in scanning mode with another carrier to alternate the conditions.

F1=100.80MHZ (Pilot sweeping from 4 kHz to 8kHz)

F2=100.50 MHZ (6.5 kHz stable)

Tested first as "multilevel alarm": PilotLow=Failure and PilotWindow=Out of Nominal Zone ;

PilotLowThr:5.0kHz, PilotThrMin:6.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:2sec, Hold:2Sec

PilotLowThr:5.0kHz, PilotThrMin:6.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:20sec, Hold:10Sec

PilotLowThr:5.0kHz, PilotThrMin:6.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:180sec, Hold:60Sec

Tested then as: PilotLow=LowThr and PilotWindow=MaxThr;

PilotLowThr:6.0kHz, PilotThrMin:0.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:2sec, Hold:2Sec

PilotLowThr:6.0kHz, PilotThrMin:0.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:20sec, Hold:10Sec

PilotLowThr:6.0kHz, PilotThrMin:0.0kHz, PilotThrMax:7.0kHz Hyst: 0.3kHz, Validation:180sec, Hold:60Sec

The behavior observed has been compatible with the specifications with the same static case accuracy error

Wolf2MS

Monitoring: Tuner-1 Data, Tuner-2 Data

Settings: Setup, Admin, Tuner-1, Tuner-2, Audio, Logout

GLOBAL: RF_{L2}, RF_{L1}, RF_{H1}, RF_{H2}, DEV, PILOT_L, PILOT, RDS_L, RDS, AUDIO_{DEV}, AUDIO_L, AUDIO_R

BLER: PI, PS, TP, TA, CT, RT, AF, EON, IH, TMC, RT₊, ODA₁

ODA₂

TUNER1 - RADIO FREQUENCY LOW LEVEL 2

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Thr	Hysteresis	Validation	Hold	Mask	Email	Trap	Label
1	Channel 1 Under Test	-----	100.80 MHz	5 sec	unmasked	30.00 dBuV	3.00 dBuV	20 sec	10 sec	unmasked	disable	enable	Tun1 RF-L2 30 dBuV Thr (Chan1)
2	Channel 2 Under Test	-----	100.50 MHz	5 sec	unmasked	30.00 dBuV	3.00 dBuV	20 sec	10 sec	unmasked	disable	enable	Tun1 RF-L2 30 dBuV Thr (Chan2)
3	Channel 3 Under Test	-----	100.80 MHz	5 sec	unmasked	30.00 dBuV	3.00 dBuV	10 sec	5 sec	unmasked	disable	enable	Tun1 RF-L2 30 dBuV Thr (Chan3)
4	Channel 4 Under Test	-----	100.50 MHz	5 sec	unmasked	30.00 dBuV	3.00 dBuV	10 sec	5 sec	unmasked	disable	enable	Tun1 RF-L2 30 dBuV Thr (Chan4)

In scanning mode all traps will be sent in the same way but the validation and hold time must be calculated on the time the scanner is observing the channel.

TUNER-1

Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data	
1	100.80 MHz	Channel 1 Under Test	SCAN	ALARM	ALARM	ALARM	▲
				Level	MPX	PI	BLER
				74.00 dBuV	57.60 kHz	5001	000 %
				Carrier	MPath	Audio	PS
				0 ppm	0 %	47.38 kHz	polle
				Adj-Chan	Pilot	M/S	AF
				-37.0 -38.0 dB	7.22 kHz	SPEECH	OK
				Alternative-Chan	RDS	CT	RT
				-69.00 dB	3.00 kHz	OK	OK
				Peak-L	Peak-R	PTY	TMC
				-1.24 dB	-1.11 dB	NO_PROG	---
				RMS-L	RMS-R	DI	IDA
				-11.77 dB	-10.14 dB	MONO STATIC	---
2	100.50 MHz	Channel 2 Under Test	SCAN	ALARM	ALARM	ALARM	▼
3	100.80 MHz	Channel 3 Under Test	SCAN	ALARM	ALARM	ALARM	▼
4	100.50 MHz	Channel 4 Under Test	SCAN	ALARM	ALARM	ALARM	▼

The traps will be sent if the instant the alarm rises up, but the Pilot Level value and the time in the var-binds will be related to the first sample out of the range.

Under the alarm condition the MPX alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the MPX error will be displayed. In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

In SmartScan Mode the behavior expected is the same of the normal Scanning mode because this parameter is continuous and always available on the channel.

REPLAY ENABLED TRAPS

The PILOT LEVEL alarm trap is replayed with its original status, time and RF value. Trap Counter is normally incremented. All data and parameters are available in the MIB L3-4 to set and test this configuration.

Add in the panel display even the out of range Pilot Level value in the list error sequence after the alarm label "PILOT_LEV"

NOTES

Noticed (as already measured and documented from MB) a dependence of the measure from the deviation/power of the signal. With strong audio compression (over 6.0 dBitubs412) or very high deviation (over 100kHz) the error range can be: -0.1kHz to +0.3kHz

Testing under low mpX power conditions and normal deviation(power less than 1 dBitubs412, deviation less than 80kHz) , the loss of precision caused from the deviation/power dependence is typically less than 0.1kHz.

16.11.7 **RDS Level – Low and Windows combined Test (Tuner-1 Tuner-2)**

An RF combined signal with one or more frequencies are applied to the tuner1 and/or tuner2 RF inputs. On one frequency signal Rds Level will be varied to test the alarms the on other ones will be used to fill the scanning list. We have used for scanning test 100.80MHz (Rds level sweeping) and 100.50MHz(Rds Level stable), RF level >70dBuV.

By slowly changing the Rds Level (in compatible way with the Validation and Hold time chosen) around the test zone, wait for the alarms and go back up to the starting point.

Tested in Static mode first.

In static mode the alarm rises up after the validation time, a trap will be sent when the status variable changes but with the time and the Rds value of the first sample out of the range. When the Rds level comes back to the (ok) state another trap will be sent with the Rds value and the time of the first sample valid.

We have tested in static mode with the following values:

Tested first as "multilevel alarm": RdsLow=Failure and RdsWindow= Out of Nominal Zone ;

RdsLowThr:2.0kHz, RdsThrMin:2.5kHz, RdsThrMax:3.5kHz Hyst: 0.3kHz, Validation:2sec, Hold:2Sec

RdsLowThr:2.0kHz, RdsThrMin:2.5kHz, RdsThrMax:3.5kHz Hyst: 0.3kHz, Validation:20sec, Hold:10Sec

RdsLowThr:2.0kHz, RdsThrMin:2.5kHz, RdsThrMax:3.5kHz Hyst: 0.3kHz, Validation:180sec, Hold:60Sec

Tested then as: RdsLow=LowThr and RdsWindow=MaxThr;

RdsLowThr:2.0kHz, RdsThrMin:0.0kHz, RdsThrMax:3.5kHz Hyst: 0.3kHz, Validation:2sec, Hold:2Sec

RdsLowThr:2.0kHz, RdsThrMin:0.0kHz, RdsThrMax:3.5kHz Hyst: 0.3kHz, Validation:20sec, Hold:10Sec

RdsLowThr:2.0kHz, RdsThrMin:0.0kHz, RdsThrMax:3.5kHz Hyst: 0.3kHz, Validation:180sec, Hold:60Sec

The behavior observed in dynamic nominal conditions (75kHz deviation, Mid audio compression/power, varied audio contents) has been compatible with the specifications with an accuracy error on the measure of about -0.1 kHz to +0.2kHz and timing errors of about 1-2 seconds

Typical Accuracy expected in general (RF Level > 70dBuV):

Min Rds Level value readable : +0.5 kHz, Max Rds Level value readable: +10.0 kHz

Accuracy: -0.1kHz +0.3kHz (Mid-High mpx power, Dev<80Khz, TDF default, see Notes)

Accuracy: -0.1kHz +0.2kHz (Low mpx power, Dev<80Khz, MB default, see Notes)

Accuracy: -0.1kHz +0.4kHz, (High mpx power, Dev>100Khz, see Notes)

TUNER1 - RDS LOW LEVEL														
Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Thr	Hysteresis	Validation	Hold	Mask	Email	Trap	Label	
1	Channel 1 Under Test	-----	100.80 MHz	5 sec	unmasked	2.00 kHz	0.20 kHz	20 sec	10 sec	unmasked	disable	enable	RdsLowLevelTrap1	
2	Channel 2 Under Test	-----	100.50 MHz	5 sec	unmasked	2.00 kHz	0.20 kHz	20 sec	10 sec	unmasked	disable	enable	RdsLowLevelTrap2	
3	Channel 3 Under Test	-----	100.80 MHz	5 sec	unmasked	2.00 kHz	0.20 kHz	20 sec	10 sec	unmasked	disable	enable	RdsLowLevelTrap3	
4	Channel 4 Under Test	-----	100.50 MHz	5 sec	unmasked	2.00 kHz	0.20 kHz	20 sec	10 sec	unmasked	disable	enable	RdsLowLevelTrap4	

TUNER1 - RDS OPERATIVE WINDOW ZONE														
Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Min. Thr	Max. Thr	Hysteresis	Validation	Hold	Mask	Email	Trap	Label
1	Channel 1 Under Test	-----	100.80 MHz	5 sec	unmasked	2.50 kHz	3.50 kHz	0.30 kHz	20 sec	10 sec	unmasked	disable	enable	TrapRds1
2	Channel 2 Under Test	-----	100.50 MHz	5 sec	unmasked	2.50 kHz	3.50 kHz	0.30 kHz	20 sec	10 sec	unmasked	disable	enable	TrapRds2
3	Channel 3 Under Test	-----	100.80 MHz	5 sec	unmasked	2.50 kHz	3.50 kHz	0.30 kHz	20 sec	10 sec	unmasked	disable	enable	TrapRds3
4	Channel 4 Under Test	-----	100.50 MHz	5 sec	unmasked	2.50 kHz	3.50 kHz	0.30 kHz	20 sec	10 sec	unmasked	disable	enable	TrapRds4

Description	Source	Time
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1RdsLevelAlarmStatusNotify	192.168.0.180	2013-10-31 ...
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1RdsLowLevelAlarmStatusNotify	192.168.0.180	2013-10-31 ...
Source:	192.168.0.180	
Timestamp:	1 hour 28 minutes 21 seconds	
SNMP Version:	2	
Trap OID:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1RdsLevelAlarmStatusNotify	
Variable Bindings:		
Name:	iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0	
Value:	[TimeTicks] 1 hour 28 minutes 21 seconds (530119)	
Name:	snmpTrapOID	
Value:	[OID] iTun1RdsLevelAlarmStatusNotify	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1Freq.1	
Value:	[OctetString] 100.80	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1RdsLevelVal.1	
Value:	[OctetString] 2.82	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqsEntry.aTun1RdsLevelTrapLabel.1	
Value:	[OctetString] TrapRds1	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.iTun1RdsLevelAlarmStatus.1	
Value:	[Integer] ok (0)	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqsEntry.iTun1RdsLevelMask.1	
Value:	[Integer] unmasked (0)	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0	
Value:	[OctetString] 2013-10-31 14:33:47	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0	
Value:	[Integer] 19	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1	
Value:	[Integer] 1	
Description: "iTun1RdsLevelStatusNotify Notification Trap "		

Description	Source	Time
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1RdsLevelAlarmStatusNotify	192.168.0.180	2013-10-31 ...
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1RdsLowLevelAlarmStatusNotify	192.168.0.180	2013-10-31 ...
Source:	192.168.0.180	
Timestamp:	1 hour 27 minutes 42 seconds	
SNMP Version:	2	
Trap OID:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1RdsLowLevelAlarmStatusNotify	
Variable Bindings:		
Name:	iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0	
Value:	[TimeTicks] 1 hour 27 minutes 42 seconds (526221)	
Name:	snmpTrapOID	
Value:	[OID] iTun1RdsLowLevelAlarmStatusNotify	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1Freq.1	
Value:	[OctetString] 100.80	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1RdsLevelVal.1	
Value:	[OctetString] 2.29	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqsEntry.aTun1RdsLowLevelTrapLabel.1	
Value:	[OctetString] RdsLowLevelTrap1	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.iTun1RdsLowLevelAlarmStatus.1	
Value:	[Integer] ok (0)	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqsTable.tun1FreqsEntry.iTun1RdsLowLevelMask.1	
Value:	[Integer] unmasked (0)	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0	
Value:	[OctetString] 2013-10-31 14:33:08	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0	
Value:	[Integer] 18	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1	
Value:	[Integer] 1	
Description: "iTun1RdsLowLevelAlarmStatusNotify Notification Trap "		

Under the alarm condition the MPX alarm led on the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the MPX error will be displayed. ("RDS_LEV")

Tested in scanning mode with another carrier with stable Rds Level to alternate the conditions.
 F1=100.80MHZ (Rds sweeping from 1.5 kHz to 4 kHz)
 F2=100.50 MHZ (2.5 kHz stable)

Tested first as "multilevel alarm": RdsLow=Failure and RdsWindow= Out of Nominal Zone ;
 RdsLowThr:2.0kHz, RdsThrMin:2.5kHz, RdsThrMax:3.5kHz Hyst: 0.3kHz, Validation:2sec, Hold:2Sec
 RdsLowThr:2.0kHz, RdsThrMin:2.5kHz, RdsThrMax:3.5kHz Hyst: 0.3kHz, Validation:20sec, Hold:10Sec
 RdsLowThr:2.0kHz, RdsThrMin:2.5kHz, RdsThrMax:3.5kHz Hyst: 0.3kHz, Validation:180sec, Hold:60Sec

Tested then as: RdsLow=LowThr and RdsWindow=MaxThr;
 RdsLowThr:2.0kHz, RdsThrMin:0.0kHz, RdsThrMax:3.5kHz Hyst: 0.3kHz, Validation:2sec, Hold:2Sec
 RdsLowThr:2.0kHz, RdsThrMin:0.0kHz, RdsThrMax:3.5kHz Hyst: 0.3kHz, Validation:20sec, Hold:10Sec
 RdsLowThr:2.0kHz, RdsThrMin:0.0kHz, RdsThrMax:3.5kHz Hyst: 0.3kHz, Validation:180sec, Hold:60Sec

The behavior observed has been compatible with the specifications with the same static case accuracy error

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Thr	Hysteresis	Validation	Hold	Mask	Email	Trap	Label
1	Channel 1 Under Test	-----	100.80 MHz	5 sec	unmasked	30.00 dBuV	3.00 dBuV	20 sec	10 sec	unmasked	disable	enable	Tun1 RF-L2 30 dBuV Thr (Chan1)
2	Channel 2 Under Test	-----	100.50 MHz	5 sec	unmasked	30.00 dBuV	3.00 dBuV	20 sec	10 sec	unmasked	disable	enable	Tun1 RF-L2 30 dBuV Thr (Chan2)
3	Channel 3 Under Test	-----	100.80 MHz	5 sec	unmasked	30.00 dBuV	3.00 dBuV	10 sec	5 sec	unmasked	disable	enable	Tun1 RF-L2 30 dBuV Thr (Chan3)
4	Channel 4 Under Test	-----	100.50 MHz	5 sec	unmasked	30.00 dBuV	3.00 dBuV	10 sec	5 sec	unmasked	disable	enable	Tun1 RF-L2 30 dBuV Thr (Chan4)

In scanning mode all traps will be sent in the same way but the validation and hold time must be calculated on the time the scanner is observing the channel.

Ch. Mem.	Frequency	Channel Label	Mode	RF	DEVIATION	RDS Data
1	100.80 MHz	Channel 1 Under Test	SCAN	ALARM	ALARM	ALARM
				Level	MPX	PI
				74.00 dBuV	66.64 kHz	5001
				Carrier	MPath	Audio
				0 ppm	0 %	58.22 kHz
				Adj-Chan	Pilot	M/S
				-30.0 -27.0 dB	6.61 kHz	SPEECH
				Alternative-Chan	RDS	CT
				-64.00 dB	1.81 kHz	OK
				Peak-L	Peak-R	PTY
				-0.85 dB	-1.08 dB	NO_PROG
				RMS-L	RMS-R	DI
				-8.80 dB	-8.47 dB	MONO STATIC
						NO_PROG
						DI
						MONO STATIC

The traps will be sent in the instant the alarm rises up, but the Rds Level value and the time in the var-binds will be related to the first sample out of the range.
 Under the alarm condition the MPX alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the MPX error will be displayed.
 In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

In SmartScan Mode the behavior expected is the same of the normal Scanning mode because this parameter is continuous and always available on the channel.

REPLAY ENABLED TRAPS

The RDS LEVEL alarm trap is replayed with its original status, time and value. Trap Counter is normally incremented. All data and parameters are available in the MIB L3-5 to set and test this configuration.

PLANNED IMPROVEMENTS

Add in the panel display even the out of range Rds Level value in the list error sequence after the alarm label "RDS_LEV"

NOTES

Noticed (as already measured and documented by MB) a dependence of the measure from the deviation/power of the signal. With strong audio compression (over 6.0 dBtubs412) or very high deviation (over 100kHz) the error range can be : -0.1kHz to +0.4kHz

Testing under low power mp3 conditions and normal deviation(power less than 1 dBtubs412, deviation less than 80kHz) , the loss of precision caused from the deviation/power dependence is typically less than +- 0.2kHz.

On this release the measurement attack time has been reduced to stabilize better the measure.

Acting with very slow attack times and fast releases measure times is possible to improve the long term precision measurement.

With an attack time of some minutes (only for the near 0.5kHz convergence) could be possible have a precision better +- 0.2kHz on all conditions filtering the positive error tendency.

16.11.8 **MPX Audio Deviation Test (Tuner-1 Tuner-2)**

An RF combined signal with one or more frequencies is applied to the tuner1 and/or tuner2 RF inputs. The MPX Audio Deviation on one carrier RF level will be varied to test the alarms while the other ones will be used to fill the scanning list. We have used 100.80MHz (Audio MPX level sweeping) and 100.50MHz (Audio MPX stable).

By slowly changing the MPX Audio deviation (in compatible way with the Silence and Hold time chosen) around the test zone, wait for the alarms and go back up to the starting point. The deviation should be generated from a controlled compressed audio from an audio processor.

Tested in Static mode first.

In static mode the alarm rises up after the MPX audio deviation is under threshold for the silence time, a trap will be sent when the status variable changes but with the time and the Audio MPX value of the first sample out of the range. When the MPX Audio deviation is greater or equal to THR for the Silence Hold the status alarm comes back to the (ok) state and another trap will be sent with the Audio MPX value and the time of the first sample valid.

Set the kHz to dBr Conversion to the chosen reference. (75kHz for TDF, 20kHz for MB [40kHz=6.0dBr])

We have tested in static mode with the following values:

Thr: -20dBr, Silence:2sec, Hold:2Sec

Thr: -20dBr, Silence:20sec, Hold:10Sec

Thr: -20dBr, Silence:180sec, Hold:60Sec

The behavior observed has been compatible with the definition with an accuracy error on the measure less than 2 kHz and timing errors of about 1-2 seconds

Typical Accuracy and Precision expected in general (RF Level > 70dBuV):

Min Dev value readable : 0 kHz, Max Dev value readable: +120 kHz

0.0 kHz is read (Range 0 kHz to +2.9 kHz)

Accuracy: +-2 kHz, Precision +-2 kHz (Range 3 kHz to +9 kHz)

Accuracy: +-2 kHz, Precision +-1 kHz (Range 10 kHz to +99 kHz)

Accuracy: +-3 kHz, Precision +-1 kHz (Range 100 kHz to +120 kHz)

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Silence Thr	Silence Time	Silence Hold	Silence Mask	Silence Email	Silence Trap	Silence Label
1	Channel 1 Under Test	-----	100.80 MHz	5 sec	unmasked	-20.00 dBr	20 sec	10 sec	unmasked	disable	enable	AudioTrap1
2	Channel 2 Under Test	-----	100.50 MHz	5 sec	unmasked	-20.00 dBr	20 sec	2 sec	masked	disable	disable	AudioTrap2
3	Channel 3 Under Test	-----	100.80 MHz	5 sec	unmasked	-20.00 dBr	20 sec	2 sec	masked	disable	disable	AudioTrap3
4	Channel 4 Under Test	-----	100.50 MHz	5 sec	unmasked	-20.00 dBr	20 sec	2 sec	masked	disable	disable	AudioTrap4
5	Channel 5 Under Test	-----	100.50 MHz	5 sec	unmasked	-20.00 dBr	20 sec	2 sec	masked	disable	disable	AudioTrap5

Under the alarm condition the MPX alarm led on the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the MPX error will be displayed. "AUDIO DEV"

Description	Source	Time
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioTun1RightSilenceAlarmStatusNotify	192.168.0.180	2013-10-31 ...
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioTun1LeftSilenceAlarmStatusNotify	192.168.0.180	2013-10-31 ...
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioTun2RightSilenceAlarmStatusNotify	192.168.0.180	2013-10-31 ...
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioTun2LeftSilenceAlarmStatusNotify	192.168.0.180	2013-10-31 ...
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1AudioSilenceAlarmStatusNotify	192.168.0.180	2013-10-31 ...
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2RfMpx.tuner2RfMpxPrefix.iTun2AudioSilenceAlarmStatusNotify	192.168.0.180	2013-10-31 ...

Source:	192.168.0.180	Timestamp:	3 hours 9 minutes 26 seconds	SNMP Version:	2
Trap OID:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1RfMpx.tuner1RfMpxPrefix.iTun1AudioSilenceAlarmStatusNotify				
Variable Bindings:					
Name:	.iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0				
Value:	[TimeTicks] 3 hours 9 minutes 26 seconds (1136669)				
Name:	snmpTrapOID				
Value:	[OID] iTun1AudioSilenceAlarmStatusNotify				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1Freq.1				
Value:	[OctetString] 100.80				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1AudioDeviationVal.1				
Value:	[OctetString] 0.00				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqTable.tun1FreqEntry.aTun1AudioSilenceTrapLabel.1				
Value:	[OctetString] AudioTrap1				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.iTun1AudioSilenceAlarmStatus.1				
Value:	[Integer] alarm (1)				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Freqs.tun1FreqTable.tun1FreqEntry.iTun1AudioSilenceMask.1				
Value:	[Integer] unmasked (0)				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0				
Value:	[OctetString] 2013-10-31 19:28:16				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0				
Value:	[Integer] 41				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1				
Value:	[Integer] 1				
Description: "iTun1AudioSilenceAlarmStatusNotify Notification Trap "					

Tested in scanning mode with another carrier to alternate the conditions.
F1=100.80MHZ (audio mpx sweeping from 5kHz to 50kHz and/or audio silences)
F2=100.50 MHZ (normal mpx audio deviation without silence)
Thr: -20dB, Silence:2sec, Hold:2Sec
Thr: -20dB, Silence:20sec, Hold:10Sec
Thr: -20dB, Silence:180sec, Hold:60Sec

The behavior observed has been compatible with the definition with an accuracy error on the measure of less than 2 kHz and timing errors of about 1-2 seconds

In scanning mode all traps will be sent in the same way but the validation and hold time must be calculated on the time the scanner is observing the channel.

The traps will be sent in the instant the alarm rises up, but the Audio MPX value and the time in the var-binds will be related to the first sample out of the range.

Under the alarm condition the MPX alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the MPX error will be displayed.
In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

In SmartScan Mode the behavior expected is the same of the normal Scanning mode because this parameter is continuous and always available on the channel.

REPLAY ENABLED TRAPS

The AUDIO DEV alarm trap is replayed with its original status, time and value. Trap Counter is normally incremented. All data and parameters are available in the MIB L3-4 to set and test this configuration.

PLANNED IMPROVEMENTS

Add in the panel display even the out of range Audio Mpx Dev value in the list error sequence after the alarm label "AUDIO DEV"

NOTES

The limitation about the measurement clears to zero under 3kHz must be considered definitive.

16.11.9 Audio Left/Right level Test (Tuner-1 Tuner-2)

An RF combined signal with one or more frequencies is applied to the tuner1 and/or tuner2 RF inputs. The Audio the Left/Right level on one frequency will be varied to test the alarms while the other ones will be used to fill the scanning list. We have used 100.80MHz (with left/right audio silences) and 100.50MHz (audio without audio silences).

TUNER-1					TUNER-2						
STEREO TUNED RDS					STEREO TUNED RDS						
Ch. Mem.	Frequency	Channel Label	Mode		Ch. Mem.	Frequency	Channel Label	Mode			
1	100.80 MHz	Channel 1 Under Test con il	STATIC		1	100.80 MHz	32 Chars Channel Label	STATIC			
RF					RF						
L2 L1 ALARM R1 R2					L2 L1 ALARM R1 R2						
Level	Carrier	MPPath	Adj-Chan	Alt-Chan	Level	Carrier	MPPath	Adj-Chan	Alt-Chan		
69.00 dBrV	2 ppm	0.00 %	-25.00 -24.87 dBr	-57.37 dBr	69.00 dBrV	2 ppm	0.00 %	-22.87 -23.12 dBr	-66.12 dBr		
DEVIATION					DEVIATION						
ALARM					ALARM						
MPX	Audio	Pilot	RDS		MPX	Audio	Pilot	RDS			
74.84 kHz	66.06 kHz	6.64 kHz	2.14 kHz		74.37 kHz	65.59 kHz	6.63 kHz	2.15 kHz			
RDS DATA					RDS DATA						
ALARM					ALARM						
PI	BLER	PS	TP	TA	PI	BLER	PS	TP	TA		
5001	000 %	12345678	OFF	ON	5001	000 %	12345678	OFF	ON		
M/S	DI	PTY	CT		M/S	DI	PTY	CT			
SPEECH	MONO STATIC	NO_PROG	OK		SPEECH	MONO STATIC	NO_PROG	OK			
RT	AF	EON	BH	TMC	RT+	ODA-1	ODA-2				
OK	OK	OK	---	---	---	---	---				
AUDIO-1					AUDIO-2						
ALARM					ALARM						
Name	Source	Peak-L	Peak-R	RMS-L	RMS-R	Name	Source	Peak-L	Peak-R	RMS-L	RMS-R
Audio 1 Name pippo pollo e	TUNER1	-0.6 dBr	-44.6 dBr	-6.0 dBr	-50.4 dBr	Audio 2 name	TUNER2	-0.6 dBr	-44.8 dBr	-6.5 dBr	-50.4 dBr
Listening AUDIO-1 (vorbis / 128kBits / stereo)					Ready						
countdown OFF					countdown OFF						

Test left/right level generating silences on both channel compatibly with the silence and hold times.

Settings 75kHz (TDF setup) as dBr references and testing with a typical Mpx stereo signal (6.5kHz pilot deviation, 2.5kHz rds deviation) means audio peaks at about (66kHz) so about -1.1dbr from the reference.

On the silenced audio channel is expected to see a level of about -43dBr (peak) and about -50dBr (rms) with medium compress audio.

Settings 20kHz (MB setup) as dBr reference and testing with a typical Mpx stereo signal (6.5kHz pilot deviation, 2.0kHz rds deviation) means audio peaks at about (66.5kHz) so about +11dBr from the reference.

On the silenced audio channel is expected to see a level of about -32dBr (peak) and about -38dBr (rms) with medium compress audio.

We have tested (using 75kHz as reference) in static mode with the following values:

Thr: -30dBr, Validation:20sec, Hold:10Sec

Thr: -35dBr, Validation:20sec, Hold:15Sec

Thr: -45dBr, Validation:20sec, Hold:15Sec

Wolf2MS AXEL

Monitoring: ↑ Tuner-1 Data Tuner-2 Data Settings: Setup Admin **Tuner-1** Tuner-2 Audio Logout

GLOBAL RF_{L2} RF_{L1} RF_{H1} RF_{H2} DEV PILOT_L PILOT RDS_L RDS AUDIO_{DEV} **AUDIO_L** AUDIO_R

BLER PI PS TP TA CT RT AF EON IH TMC RT₊ ODA₁

ODA₂

TUNER1 - AUDIO LEFT LEVEL

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Silence Thr	Silence Time	Silence Hold	Silence Mask	Silence Email	Silence Trap	Silence Label
1	Channel 1 Under Test	-----	100.80 MHz	5 sec	unmasked	-30.00 dBr	20 sec	10 sec	unmasked	disable	enable	AudioTrap1
2	Channel 2 Under Test	-----	100.50 MHz	5 sec	unmasked	-30.00 dBr	20 sec	10 sec	unmasked	disable	enable	AudioTrap2
3	Channel 3 Under Test	-----	100.80 MHz	5 sec	unmasked	-30.00 dBr	20 sec	10 sec	unmasked	disable	enable	AudioTrap3
4	Channel 4 Under Test	-----	100.50 MHz	5 sec	unmasked	-30.00 dBr	20 sec	10 sec	unmasked	disable	enable	AudioTrap4
5	Channel 5 Under Test	-----	100.80 MHz	5 sec	unmasked	-30.00 dBr	20 sec	10 sec	unmasked	disable	enable	AudioTrap5

Under the alarm condition the MPX alarm led on (We have associated the audio silence alarm to the panel leds mpX error) the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the MPX error will be displayed. ("RIGHT/LEFT SIL")

Tested in scanning mode with another carrier to alternate the conditions.

F1=100.80MHZ (Left/ Right audio silences)

F2=100.50 MHZ (audio deviation without audio silences)

Thr: -30dBr, Validation:20sec, Hold:10Sec

Thr: -35dBr, Validation:20sec, Hold:15Sec

Thr: -45dBr, Validation:20sec, Hold:15Sec

Description	Source	Time
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioTun1RightSilenceAlarmStatusNotify	192.168.0.180	2013-11-13 12:50:22
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioTun2RightSilenceAlarmStatusNotify	192.168.0.180	2013-11-13 12:50:22
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioTun1RightSilenceAlarmStatusNotify	192.168.0.180	2013-11-13 12:49:58
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioTun2RightSilenceAlarmStatusNotify	192.168.0.180	2013-11-13 12:49:58

Variable Bindings:

Name:	.iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0
Value:	[TimeTicks] 4 hours 26 minutes 27 seconds (1598766)
Name:	snmpTrapOID
Value:	[OID] iAudioTun1RightSilenceAlarmStatusNotify
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1Freq.1
Value:	[OctetString] 100.80
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioData.audioTun1DataTable.audioTun1DataEntry.fAudioTun1RightRms.1
Value:	[OctetString] -50.20
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioSettings.audioTun1SetupTable.audioTun1SetupEntry.aAudioTun1RightSilenceTrapLabel.1
Value:	[OctetString] AudioTrap1
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioData.audioTun1DataTable.audioTun1DataEntry.iAudioTun1RightSilenceAlarmStatus.1
Value:	[Integer] alarm (1)
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioSettings.audioTun1SetupTable.audioTun1SetupEntry.iAudioTun1RightSilenceMask.1
Value:	[Integer] unmasked (0)
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0
Value:	[OctetString] 2013-11-13 12:50:04
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0
Value:	[Integer] 72
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioData.audioTun1DataTable.audioTun1DataEntry.audioTun1DataIndex.1
Value:	[Integer] 1
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioSettings.audio1Setup.iAudio1Source.0
Value:	[Integer] tuner1 (0)
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioSettings.audio2Setup.iAudio2Source.0
Value:	[Integer] tuner2 (1)

Description	Source	Time
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioTun2LeftSilenceAlarmStatusNotify	192.168.0.180	2013-11-13 13:02:59
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioTun1LeftSilenceAlarmStatusNotify	192.168.0.180	2013-11-13 13:02:59
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioTun2RightSilenceAlarmStatusNotify	192.168.0.180	2013-11-13 13:02:40
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioTun1RightSilenceAlarmStatusNotify	192.168.0.180	2013-11-13 13:02:39
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.180	2013-11-13 13:01:09

Source:	192.168.0.180	Timestamp:	4 hours 39 minutes 4 seconds	SNMP Version:	2
Trap OID:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioTun2LeftSilenceAlarmStatusNotify				
Variable Bindings:					
Name:	.iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0				
Value:	[TimeTicks] 4 hours 39 minutes 4 seconds (1674455)				
Name:	snmpTrapOID				
Value:	[OID] iAudioTun2LeftSilenceAlarmStatusNotify				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner2Module.tun2Data.tun2DataTable.tun2DataEntry.ftun2Freq.1				
Value:	[OctetString] 100.80				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioData.audioTun2DataTable.audioTun2DataEntry.fAudioTun2LeftRms.1				
Value:	[OctetString] -50.08				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioSettings.audioTun2SetupTable.audioTun2SetupEntry.aAudioTun2LeftSilenceTrapLabel.1				
Value:	[OctetString] AudioTrap1				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioData.audioTun2DataTable.audioTun2DataEntry.iAudioTun2LeftSilenceAlarmStatus.1				
Value:	[Integer] alarm (1)				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioSettings.audioTun2SetupTable.audioTun2SetupEntry.iAudioTun2LeftSilenceMask.1				
Value:	[Integer] unmasked (0)				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0				
Value:	[OctetString] 2013-11-13 13:02:41				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0				
Value:	[Integer] 77				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioData.audioTun2DataTable.audioTun2DataEntry.audioTun2DataIndex.1				
Value:	[Integer] 1				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioSettings.audio1Setup.iAudio1Source.0				
Value:	[Integer] tuner1 (0)				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioSettings.audio2Setup.iAudio2Source.0				

The traps will be sent in the instant the alarm rises up, but Left/Right and the time in the var-binds will be related to the first sample out of the range.

Under the alarm condition the MPX alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the MPX error will be displayed.

In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

In SmartScan Mode the behavior expected is the same of the normal Scanning mode because this parameter is continuous and always available on the channel.

REPLAY ENABLED TRAPS

The LEFT/RIGHT audio silence alarm trap are replayed with their original status, time and value. Trap Counter is normally incremented.

All data and parameters are available in the MIB L3-5 to set and test this configuration.

NOTES

After some problems found in the release 0.62 (levels alignment , peaks in the separation, requests to set silence threshold as lower as possible) we have modified some things.

1) The source silence alarm signal is now the RMS value in place of the PEAK (this choice allows to gain 3-5 dB in the absolute level of the threshold). The average RMS signal in the muted channel is about -50 dBr (TDF reference) or -38dBr (MB reference)

2) Modified the attack time (now slower) of the audio measurement in the level zone from -50dBr to -30dBr to filter separation peaks in some situations. This modification allows even to stabilize the muted channel separation, slightly increasing the max measured separation. The behavior in the nominal level zone (-20dBr to +10dBr) is exactly the same. This solution filters an unexpected receiver behavior in the particular case of high channel level unbalance (one channel muted) and dynamic changes from very low to high levels. This seems to depend by a dynamic module (stereo blend engine) that continues to act on the separation even in disabled mode. We are asking to Silicon Labs to find a solution even on the receiver audio signal.

16.11.10 Smart Scan General Description

The SMART-SCAN mode has been strongly modified and tested in the last release. Here a little general description for understanding and testing the definitive behavior .

In general the SMART-SCAN mode locks the scanning sequence before rising an alarm and it waits a defined time (actually fixed for every service). In general with all services having the "Timeout" parameter in place of the "Validation" in SMART-SCAN the behavior is different. The "Timeout" (as name and notation) is used because we intended that the service is complex or non always available on the channel and instead of a validated error condition, we are searching a valid condition before "Timeout" expires. This condition generates trouble in scanning situations, so doesn't exist a sampled out of range data, but a waited event missing in the defined timing.

SMART-SCAN is able to wait up to six services at the same time (concurrently) handling the scanning sequencer and masking the alarms under verification. At first it tries to sample the event in the scanning time, but at the end of the timeout, before rising the alarm, waits a time (about the double of the normal period expected for the kind of service) and decides to rise the alarm or not.

Example: CT service test inside a scanning list of 4 frequencies.

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Timeout	Max Offset	Mask	Email	Trap	Label
1	Channel 1 Under Test	----	100.80 MHz	5 sec	unmasked	600 sec	60 sec	unmasked	disable	disable	Tun1 Rds CT Trap 1
2	Channel 2 Under Test	-----	100.50 MHz	5 sec	unmasked	600 sec	60 sec	unmasked	disable	disable	Tun1 Rds CT Trap 2
3	Channel 3 Under Test	-----	100.80 MHz	5 sec	unmasked	600 sec	60 sec	unmasked	disable	disable	Tun1 Rds CT Trap 3
4	Channel 4 Under Test	-----	100.50 MHz	5 sec	unmasked	600 sec	60 sec	unmasked	disable	disable	Tun1 Rds CT Trap 4
5	Chan5 Label	-----	87.50 MHz	10 sec	unmasked	130 sec	60 sec	masked	disable	disable	Tun1 Rds CT Trap 5

The 4A group will be searched for 600 seconds in every frequency. At the end of the 600seconds per stations (that's means 2400 seconds) we are lucky and on three frequencies and we have found the 4A group, but in one them we have not been able to sample a 4A group.

At the end of the "Timeout" in normal SCAN-MODE the CT alarm is raised for the unlucky station, the one in which the random scanning routine failed.

In SMART-SCAN mode instead, the scanner will lock on the unlucky frequency and it will wait up to 130 seconds (defined Smart Wait time for the CT service) to verify if really the service isn't available. If the waiting stage has success, the scanner restarts, and it will try again to catch another 4A in the next 600 seconds with a normal scanning sequence.


If the waiting stage fails the alarm is raised and the scanner restarts to loop.

In the previous releases in the next loop (failed SmartWait case), the SMART-SCAN locks again trying to solve the alarm, instead in the last release for the next 30 minutes (only for the frequency and the service with the alarm raised) the loop will continue like a normal scan mode avoiding to lock the normal scanning sequence and trying to sample a valid 4A .

So, in the last release the SMART-WAIT will try only one time every "RETRY SMART WAIT" time to lock the sequence and verify an alarm after the previous one failed. This behavior will allow to avoid locking situations for the other stations in the scanning list and with a one or more fails in a scanning list, the average looping will be guaranteed.

Please test it and give us suggestions to improve it (if necessary) or report buggy behaviors .

The SMART-WAIT state is visible on the web page as a red line under the Channel Number. The service/services with the problem will be displayed inside the brackets. In the current release max 2 services are displayed at the same time, in the final one will be 3.

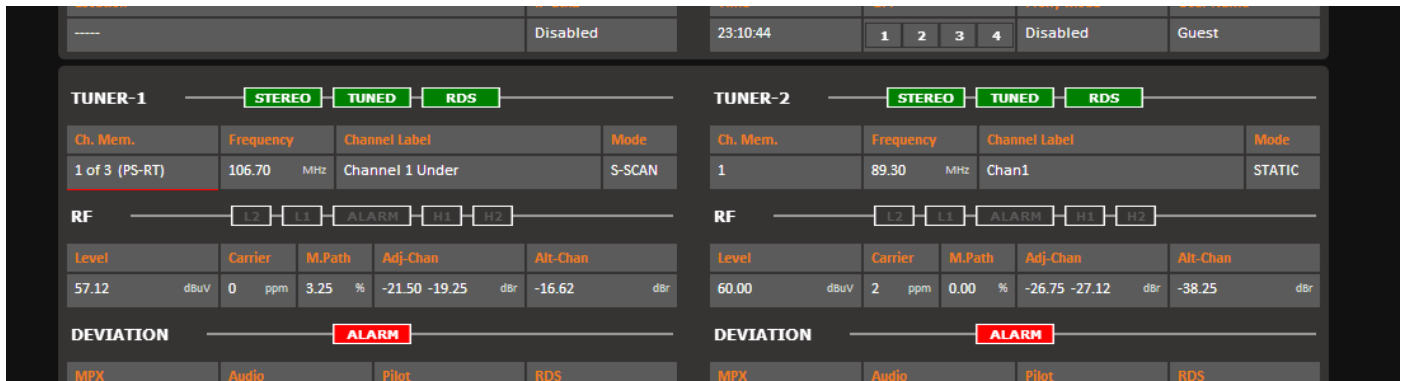

SMART-WAIT timings:

CT: Max 130 seconds
(waits for a 4A, able to recognize an offset error or the failure of the service)

PS: Max 80 seconds
(waits a sequence of PS and able to recognize of up to 4 different PS or simply waits for PS variations)

RT: Max 80 seconds
(waits for A/B flag variations and/or groups 2A-2B presence)

TMC: Max 60 seconds
(waits for TMC service registration and/or TMC data variations)

RT+: Max 190 seconds
(waits for RT+ service registration and/or RT+ data variations)

IH: Max 190 seconds
(waits for IH data variations or service presence)

ODA1-2: Max 120 seconds
(waits for ODAx service registration and/or ODAx data variations)

RETRY SMART WAIT : 30 minutes (all services)

Actually these timings are fixed, but it planned in future to create a parameters group to adjust them.

16.11.11 RDS PI Data test (Tuner-1 Tuner-2)

This test checks alarms and traps on a Radio with PI=5215 tuned on frequency 100.5MHz.
The test was carried out on both tuners.

In Static mode we have set a PI Ref Mask to 5000 with Validation time and Hold time equal to 10 sec. (see fig. below)

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Ref 1	Ref 2	Ref 3	Validation	Hold	Mask	Email	Trap	Label
1	Chan1 Label	----	100.50 MHz	5 sec	unmasked	5000			10 sec	10 sec	unmasked	disable	enable	Tun1 Rds PI Trap 1
2	Chan2 Label	----	87.50 MHz	5 sec	unmasked	5000	5000	5000	10 sec	10 sec	masked	disable	disable	Tun1 Rds PI Trap 2
3	Chan3 Label	----	87.50 MHz	5 sec	unmasked	5000	5000	5000	10 sec	10 sec	masked	disable	disable	Tun1 Rds PI Trap 3

The system checks for a match between any not empty Ref Masks and received PI. If at least one of them matches OK condition is true, otherwise an alarm condition raises.

In this case there is an alarm condition (received PI=5215 won't match with PI Ref1=5000).

Under the alarm condition the RDS alarm led (we have associated the PI alarm to the panel led Rds error) on the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

Tested in Scan mode with 3 frequencies:

F1: 100.5 MHz

F2: 95.3 MHz

F3: 96.7 MHz

and two Pi Ref Mask: 5000 and 51** (we have used wildcards) as depicted below.

Validation Time = 15 sec. Hold Time = 10 sec.

For this test we've added PI Ref Mask2=51**. Now system search for a PI=5000 or a PI from 5100 up to 51FF.

Received PI=5215 don't match any PI Ref so an alarm condition raises.

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Ref 1	Ref 2	Ref 3	Validation	Hold	Mask	Email	Trap	Label
1	Chan1 Label	----	100.50 MHz	10 sec	unmasked	5000	51**		15 sec	10 sec	unmasked	disable	enable	Tun1 Rds PI Trap 1
2	Chan2 Label	----	95.30 MHz	10 sec	unmasked	5000	5000	5000	10 sec	10 sec	masked	disable	disable	Tun1 Rds PI Trap 2
3	Chan3 Label	----	96.70 MHz	10 sec	unmasked	5000	5000	5000	10 sec	10 sec	masked	disable	disable	Tun1 Rds PI Trap 3
4	Chan4 Label	----	102.30 MHz	5 sec	unmasked	5000	5000	5000	10 sec	10 sec	masked	disable	disable	Tun1 Rds PI Trap 4



Description	Source	Time
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanPiStat...	192.168.0.141	2013-11-11 08:51:00
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanPiStat...	192.168.0.141	2013-11-11 08:50:38
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanPiStat...	192.168.0.141	2013-11-11 08:49:14
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanPiStat...	192.168.0.141	2013-11-11 08:48:39

Source:	192.168.0.141	Timestamp:	25 minutes 30 seconds	SNMP Version:	2
Trap OID:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanPiStatusNotify				
Variable Bindings:					
Name:	.iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0				
Value:	[TimeTicks] 25 minutes 30 seconds (153029)				
Name:	snmpTrapOID				
Value:	[OID] iTun1DataScanPiStatusNotify				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1Freq.1				
Value:	[OctetString] 100.50				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.aTun1DataScanPiVal.1				
Value:	[OctetString] 5215				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.iTun1DataScanPiStatus.1				
Value:	[Integer] alarm (1)				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.aTun1RdsSettingsPiTrapLabel.1				
Value:	[OctetString] Tun1 Rds PI Trap 1				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.iTun1RdsSettingsPiMask.1				
Value:	[Integer] unmasked (0)				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0				
Value:	[OctetString] 2013-11-11 08:50:51				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0				
Value:	[Integer] 8				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1				
Value:	[Integer] 1				
Description:	"iTun1DataScanPiStatus Notification Trap "				

The traps will be sent in the instant the alarm rises up, but PI and the time in the var-binds will be related to the first failed check.

Under the alarm condition the RDS alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

In SmartScan Mode the behavior expected is the same of the normal Scanning mode because this parameter is continuous and always available on the channel.

REPLAY ENABLED TRAPS

The Rds PI alarm trap are replayed with its original status, time and value. Trap Counter is normally incremented.


All data and parameters are available in the MIB L3-5 to set and test this configuration.

NOTES

The PI Reference Masks accepts (multiple) * wildcards in each position. Empty Ref Masks will be not taken into account. SMARTMODE references inside the brackets when sequencer locks missing in the scan monitor tab pages (will be fixed).

16.11.12 RDS PS Data test (Tuner-1 Tuner-2)

This test checks alarms and traps on a Radio with PS="ABCRADIO" tuned on frequency 100.5MHz. The test was carried out on both tuners.

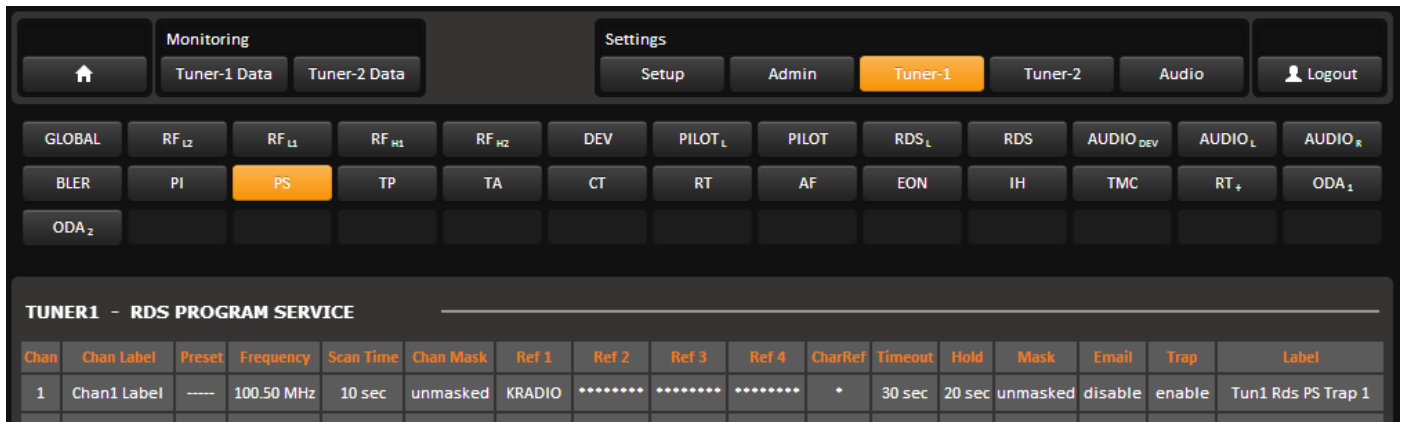

In static mode we have set PS Ref Mask1 to "KRADIO" and we leave default values on Ref Mask2 up to Ref Mask4 (*****). CharRef is set to "*", a Timeout of 30 sec and a Hold Time of 20 sec as in fig. above.

The system needs to find a match between received PS and ALL of not empty Ref Masks no later than Timeout, otherwise an alarm condition raises.

PS Ref Masks (like PI) accept wildcards and wildcard character is shown by CharRef field. Of course this character can be modified by user. Note that Ref Masks can be 1 to 8 chars long. If a Ref Mask is shorter than 8 chars a sub-string search is performed on received PS. Also note that a Ref Mask formed by 8 wildcards will match anyway.

Instead if the Timeout is equal to zero only PS variations will be searched for having a valid condition

In this case an alarm condition raises up because system search a match for Ref1 substring (KRADIO) into PS.



Description	Source	Time
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanPsSt...	192.168.0.141	2013-11-11 11:18:04
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanPsSt...	192.168.0.141	2013-11-11 10:47:30
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanPsSt...	192.168.0.141	2013-11-11 10:41:40
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanPsSt...	192.168.0.141	2013-11-11 10:40:15

Source:	192.168.0.141	Timestamp:	2 hours 52 minutes 34 seconds	SNMP Version:	2
Trap OID:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanPsStatusNotify				
Variable Bindings:					
Name:	iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0				
Value:	[TimeTicks] 2 hours 52 minutes 34 seconds (1035435)				
Name:	snmpTrapOID				
Value:	[OID] iTun1DataScanPsStatusNotify				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1Freq.1				
Value:	[OctetString] 100.50				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.aTun1DataScanPsVal.1				
Value:	[OctetString] ABCRADIO				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.iTun1DataScanPsStatus.1				
Value:	[Integer] alarm (1)				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.aTun1RdsSettingsPsTrapLabel.1				
Value:	[OctetString] Tun1 Rds PS Trap 1				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.iTun1RdsSettingsPsMask.1				
Value:	[Integer] unmasked (0)				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0				
Value:	[OctetString] 2013-11-11 11:18:04				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0				
Value:	[Integer] 39				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1				
Value:	[Integer] 1				
Description:	"iTun1DataScanPsStatus Notification Trap "				

Under the alarm condition the RDS alarm led (we have associated the PS alarm to the panel led Rds error) on the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

Tested in Scan mode with 3 frequencies:

F1: 100.5 MHz

F2: 95.3 MHz

F3: 96.7 MHz

and two PS Ref Mask: "KRADIO" and "ABC" as depicted below.

Timeout = 30 sec. Hold Time = 10 sec.

In Scan Mode system perform a time-division cyclical check on selected radios (see Settings->Tuner1->Last Channel Scanning Index or alter ego for Tuner 2). It starts from Chan 1 and rests for the setted Scan Time related to channel before pass away. If an alarm condition (or more of them) is found, it will be signaled (and – if enabled – a trap is launched).

Now system search a match on Chan1 PS (ABCRADIO) with two Refs (substring "KRADIO" and substring "ABC"). PS Ref Mask2 content will match ("ABC" is a substring of "ABCRADIO") but Ref Mask1 will not, so an error condition will raises up.

Monitoring

Home

Tuner-1 Data

Tuner-2 Data

Settings

Setup

Admin

Tuner-1

Tuner-2

Audio

Logout

GLOBAL

RF_{L2}

RF_{L4}

RF_{H1}

RF_{H2}

DEV

PILOT_L

PILOT

RDS_L

RDS

AUDIO_{DEV}

AUDIO_L

AUDIO_R

BLER

PI

PS

TP

TA

CT

RT

AF

EON

IH

TMC

RT₊

ODA₁

ODA₂

TUNER1 - RDS PROGRAM SERVICE

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Ref 1	Ref 2	Ref 3	Ref 4	CharRef	Timeout	Hold	Mask	Email	Trap	Label
1	Chan1 Label	----	100.50 MHz	10 sec	unmasked	KRADIO	ABC			*	30 sec	20 sec	unmasked	disable	enable	Tun1 Rds PS Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	*****	*****	*****	*****	*	60 sec	10 sec	masked	disable	disable	Tun1 Rds PS Trap 2
3	Chan3 Label	-----	96.70 MHz	10 sec	unmasked	*****	*****	*****	*****	*	60 sec	10 sec	masked	disable	disable	Tun1 Rds PS Trap 3
4	Chan4 Label	-----	102.30 MHz	5 sec	unmasked	*****	*****	*****	*****	*	60 sec	10 sec	masked	disable	disable	Tun1 Rds PS Trap 4

The traps will be sent in the instant the alarm rises up, but PS and the time in the var-binds will be related to the moment the Timeout is expired.

Under the alarm condition the RDS alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

Tested in SmartScan with the same setup depicted above for 'normal' Scan Mode.

Scan Mode is an evolution of normal Scan Mode that rigidly cycles between selected Channels.

If an alarm condition is found on a channel, instead of state an alarm condition, system stops on channel for a period (depending on tested service that cause alarm condition) collecting more data. In this state no alarm or Trap was reported. The Channel Memory index reports the cause(s) of the stop (see below: "1 of 3 (PS)").

TUNER-1

STEREO

TUNED

RDS

Ch. Mem.	Frequency	Channel Label	Mode
1 of 3 (PS)	100.50 MHz	Chan1 Label	S-SCAN

RF

L2

L1

ALARM

H1

H2

Level	Carrier	M.Path	Adj-Chan	Alt-Chan
81.00 dBuV	-7 ppm	0.00 %	-38.25 -36.87 dB	-66.37 dB

DEVIATION

ALARM

MPX	Audio	Pilot	RDS
13.05 kHz	0.00 kHz	6.50 kHz	3.32 kHz

RDS DATA

ALARM

PI	BLER	PS	TP	TA			
5215	000 %	ABCRADIO	OFF	OFF			
M/S	DI	PTY	CT				
MUSIC	STEREO STATIC	JAZZ	OK				
RT	AF	EON	IH	TMC	RT+	ODA-1	ODA-2
OK	OK	OK	---	---	---	---	---

If a valid (no alarm) condition is found in this time, system unlocks and normal scan reprises.
If a new alarm condition raises up, system stops again for another observation step.

If no valid condition is found (as in this test case), system unlocks, normal scan reprises and an alarm condition and/or a trap is reported:

TUNER-1

STEREO

TUNED

RDS

Ch. Mem.	Frequency	Channel Label	Mode
1 of 3	100.50 MHz	Chan1 Label	S-SCAN

RF

L2

L1

ALARM

H1

H2

Level	Carrier	M.Path	Adj-Chan	Alt-Chan
82.00 dBuV	-7 ppm	0.00 %	-38.37 -36.87 dB	-66.25 dB

DEVIATION

ALARM

MPX	Audio	Pilot	RDS
12.75 kHz	0.00 kHz	6.52 kHz	3.37 kHz

RDS DATA

ALARM

PI	BLER	PS	TP	TA			
5215	000 %	ABCRADIO	OFF	OFF			
M/S	DI	PTY	CT				
MUSIC	STEREO STATIC	JAZZ	OK				
RT	AF	EON	IH	TMC	RT+	ODA-1	ODA-2
OK	OK	OK	---	---	---	---	---

Note that Channel Memory reports normal index display ("1 of 3").

If alarm condition persists, after a while the system stops again on channel and the procedure restarts (note that now the alarm condition status ON persists).

REPLAY ENABLED TRAPS

The Rds PS alarm trap are replayed with its original status, time and value of the moment in which the Timeout is expired. Trap Counter is normally incremented.

All data and parameters are available in the MIB L3-5 to set and test this configuration.

NOTES

The PS Reference Masks accepts (multiple) wildcards. Used wildcard for the masks of a channel is reported and selectable into Settings. Empty Ref Masks will be not taken into account.

SMARTMODE references inside the brackets when sequencer locks missing in the scan monitor tab pages (will be fixed).

16.11.13 **RDS TP Data test (Tuner-1 Tuner-2)**

This test checks alarms and traps on a Radio with TP=ON tuned on frequency 100.5MHz.
The test was carried out on both tuners.

System checks received TP and compares it with TP Ref. If a match is found an alarm condition raises up.

In Static mode we have set a TP Ref Mask to OFF with Validation time of 15 sec. and Hold time equal to 25 sec. (see fig. below)

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Ref	Validation	Hold	Mask	Email	Trap	Label
1	Chan1 Label	-----	100.50 MHz	10 sec	unmasked	off	15 sec	25 sec	unmasked	disable	enable	Rds 1 TP Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	off	10 sec	10 sec	masked	disable	disable	Rds 1 TP Trap 2

Under the alarm condition the RDS alarm led (we have associated the TP alarm to the panel led Rds error) on the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

Tested in Scan mode with 3 frequencies:

F1: 100.5 MHz

F2: 95.3 MHz

F3: 96.7 MHz

and TP Ref Mask: OFF as depicted below.

Validation Time = 15 sec. Hold Time = 25 sec.

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Ref	Validation	Hold	Mask	Email	Trap	Label
1	Chan1 Label	-----	100.50 MHz	10 sec	unmasked	off	15 sec	25 sec	unmasked	disable	enable	ciccio
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	off	10 sec	10 sec	masked	disable	disable	Rds 2 TP Trap 2
3	Chan3 Label	-----	96.70 MHz	10 sec	unmasked	off	10 sec	10 sec	masked	disable	disable	Rds 2 TP Trap 3
4	Chan4 Label	-----	102.30 MHz	5 sec	unmasked	off	10 sec	10 sec	masked	disable	disable	Rds 2 TP Trap 4

Description		Source	Time
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanTpSt...		192.168.0.141	2013-11-11 15:45:25
Source:	192.168.0.141	Timestamp:	2 hours 20 minutes 58 seconds
Trap OID:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanTpStatusNotify		
Variable Bindings:			
Name:	iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0		
Value:	[TimeTicks] 2 hours 20 minutes 58 seconds (845849)		
Name:	snmpTrapOID		
Value:	[OID] iTun1DataScanTpStatusNotify		
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1Freq		
Value:	[OctetString] 100.50		
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.iTun1DataScanTpVal		
Value:	[Integer] tpon (1)		
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.iTun1DataScanTpStatus		
Value:	[Integer] alarm (1)		
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.aTun1RdsSettingsTpTrapLabel		
Value:	[OctetString] Rds 1 TP Trap 1		
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.iTun1RdsSettingsTpMask		
Value:	[Integer] unmasked (0)		
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0		
Value:	[OctetString] 2013-11-11 15:45:11		
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0		
Value:	[Integer] 12		
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex		
Value:	[Integer] 1		
Description:	"iTun2DataScanTpStatus Notification Trap "		

The traps will be sent in the instant the alarm rises up, but TP and the time in the var-binds will be related to the first failed check.

Under the alarm condition the RDS alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the RDS error will be displayed. In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

In SmartScan Mode the behavior expected is the same of the normal Scanning mode because this parameter is continuous and always available on the channel.

REPLAY ENABLED TRAPS

The Rds TP alarm trap are replayed with its original status, time and value. Trap Counter is normally incremented. All data and parameters are available in the MIB L3-5 to set and test this configuration.

SMARTMODE references inside the brackets when sequencer locks missing in the scan monitor tab pages (will be fixed).

16.11.14 RDS TA Data test (Tuner-1 Tuner-2)

This test checks alarms and traps on a Radio with TA=ON tuned on frequency 100.5MHz.
The test was carried out on both tuners.

System can check TA status and raise an alarm after a period of TA=ON (MaxOnTimeout) as can monitor TA status invariance in time (alarm can be signaled after NoVarTimeout).

In Static mode we have set a TA MaxOnTimeout to 60 sec. and NoVarTimeout to 1440 min. (see fig. below)
Tuned radio TA=ON will raise up an alarm after MaxOnTimeout.

The screenshot shows the 'Monitoring' tab with 'Tuner-1 Data' selected. The 'TA' button is highlighted in orange. Below the button grid, the 'TUNER1 - RDS TRAFFIC ANNOUNCEMENT' table is displayed.

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	MaxOnTimeout	NoVarTimeout	Mask	Email	Trap	Label
1	Chan1 Label	----	100.50 MHz	10 sec	unmasked	60 sec	1440 min	unmasked	disable	enable	Tun1 Rds TA Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	60 sec	1440 min	masked	disable	disable	Tun1 Rds TA Trap 2

Under the alarm condition the RDS alarm led (we have associated the TA alarm to the panel led Rds error) on the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

Tested in Scan mode with 3 frequencies:

F1: 100.5 MHz

F2: 95.3 MHz

F3: 96.7 MHz

and MaxOnTimeout=60 sec. – NoVarTimeout=1440 min. as depicted below.

In Scan Mode an alarm condition raises up after MaxOnTimeout time passed on channel 1.

The screenshot shows the 'Monitoring' tab with 'Tuner-1 Data' selected. The 'TA' button is highlighted in orange. Below the button grid, the 'TUNER1 - RDS TRAFFIC ANNOUNCEMENT' table is displayed with 3 channels.

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	MaxOnTimeout	NoVarTimeout	Mask	Email	Trap	Label
1	Chan1 Label	----	100.50 MHz	10 sec	unmasked	60 sec	1440 min	unmasked	disable	enable	Tun1 Rds TA Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	60 sec	1440 min	masked	disable	disable	Tun1 Rds TA Trap 2
3	Chan3 Label	-----	96.70 MHz	10 sec	unmasked	60 sec	1440 min	masked	disable	disable	Tun1 Rds TA Trap 3

Description	Source	Time
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanTaStatusNotify	192.168.0.141	2013-11-12 09:30:40
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanTaStatusNotify	192.168.0.141	2013-11-12 09:23:16
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanTaStatusNotify	192.168.0.141	2013-11-12 09:20:30
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanTaStatusNotify	192.168.0.141	2013-11-12 09:19:31
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanTaStatusNotify	192.168.0.141	2013-11-12 09:16:20
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanTaStatusNotify	192.168.0.141	2013-11-12 09:15:21
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanTaStatusNotify	192.168.0.141	2013-11-12 09:14:01
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2Rds.tuner2RdsPrefix.iTun2DataScanTpStatusNotify	192.168.0.141	2013-11-12 09:01:33
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2Rds.tuner2RdsPrefix.iTun2DataScanTpStatusNotify	192.168.0.141	2013-11-12 09:00:00
Source:	192.168.0.141	Timestamp: 1 hour 4 minutes 49 seconds
Trap OID:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanTaStatusNotify	
Variable Bindings:		
Name:	iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0	
Value:	[TimeTicks] 1 hour 4 minutes 49 seconds (388926)	
Name:	snmpTrapOID	
Value:	[OID] iTun1DataScanTaStatusNotify	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.ftun1Freq.1	
Value:	[OctetString] 100.50	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.iTun1DataScanTaVal.1	
Value:	[Integer] taon (1)	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.iTun1DataScanTaStatus.1	
Value:	[Integer] alarm (1)	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.aTun1RdsSettingsTaTrapLabel.1	
Value:	[OctetString] Tun1 Rds TA Trap 1	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.iTun1RdsSettingsTaMask.1	
Value:	[Integer] unmasked (0)	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTune.0	
Value:	[OctetString] 2013-11-12 09:30:40	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0	
Value:	[Integer] 16	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1	
Value:	[Integer] 1	
Description:	"iTun1DataScanTaStatus Notification Trap "	

The traps will be sent in the instant the alarm rises up, but TA and the time in the var-binds will be related to the first failed check.

Under the alarm condition the RDS alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

In SmartScan Mode the behavior expected is the same of the normal Scanning mode because this parameter is continuous and always available on the channel.

A second branch of test is performed with MaxOnTimeout=0 and NoVarTimeout=2 min. on each tuner in Static mode as depicted below:

Monitoring				Settings							
Tuner-1 Data				Tuner-2 Data							
Setup				Admin				Tuner-1			
								Tuner-2			
								Audio			
								Logout			
GLOBAL	RF _{L2}	RF _{L1}	RF _{H1}	RF _{H2}	DEV	PILOT _L	PILOT	RDS _L	RDS	AUDIO _{DEV}	AUDIO _L
BLER	PI	PS	TP	TA	CT	RT	AF	EON	IH	TMC	RT ₁
ODA ₂											ODA ₁
TUNER1 - RDS TRAFFIC ANNOUNCEMENT											
Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	MaxOnTimeout	NoVarTimeout	Mask	Email	Trap	Label
1	Chan1 Label	----	100.50 MHz	10 sec	unmasked	0 sec	2 min	unmasked	disable	enable	Tun1 Rds TA Trap 1
2	Chan2 Label	----	95.30 MHz	10 sec	unmasked	60 sec	1440 min	masked	disable	disable	Tun1 Rds TA Trap 2

In this case we don't care of TA=ON condition, but we look for TA status invariance in time. After NoVarTimeout time (if TA status remains untouched) an alarm condition raises up.

And then in Scan Mode and SmartScan Mode with three frequencies

F1: 100.5 MHz

F2: 95.3 MHz

F3: 96.7 MHz

and MaxOnTimeout=0 sec. – NoVarTimeout=2 min. as depicted below.

Monitoring

Tuner-1 Data

Tuner-2 Data

Settings

Setup

Admin

Tuner-1

Tuner-2

Audio

Logout

GLOBAL

RF_{L2}

RF_{L1}

RF_{H1}

RF_{H2}

DEV

PILOT_L

PILOT

RDS_L

RDS

AUDIO_{DEV}

AUDIO_L

AUDIO_R

BLER

PI

PS

TP

TA

CT

RT

AF

EON

IH

TMC

RT₊

ODA₁

ODA₂

TUNER1 - RDS TRAFFIC ANNOUNCEMENT

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	MaxOnTimeout	NoVarTimeout	Mask	Email	Trap	Label
1	Chan1 Label	----	100.50 MHz	10 sec	unmasked	0 sec	2 min	unmasked	disable	enable	Tun1 Rds TA Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	60 sec	1440 min	masked	disable	disable	Tun1 Rds TA Trap 2
3	Chan3 Label	-----	96.70 MHz	10 sec	unmasked	60 sec	1440 min	masked	disable	disable	Tun1 Rds TA Trap 3
4	Chan4 Label	-----	102.30 MHz	5 sec	unmasked	60 sec	1440 min	masked	disable	disable	Tun1 Rds TA Trap 4

REPLAY ENABLED TRAPS

The Rds TA alarm trap are replayed with its original status, time and value. Trap Counter is normally incremented. All data and parameters are available in the MIB L3-5 to set and test this configuration.

NOTES

Unwanted checks on TA signal were performed by settings corresponding Timeout to 0. SMARTMODE references inside the brackets when sequencer locks missing in the scan monitor tab pages (will be fixed).

16.11.15 **RDS CT Data test (Tuner-1 Tuner-2)**

This test checks alarms and traps on a Radio tuned on frequency 100.5MHz that carries CT service.
The test was carried out on both tuners.

The system can check CT service signal presence and time offset between internal system clock and CT carried time.

First, we have set Radio CT=ON with an offset about 10 min.

When system receives first CT data, displays it and calculate time difference:

CT		ALARM	
DATE	TIME	LocalTime Offset	Offset Time
12/11/13	09:45	+01.00	595 sec

Then we have tested in Static Mode with Timeout=360 sec. and Offset Time = 60 sec.

Timeout field indicates max time the system wait for a new CT group before raise up an alarm.

Monitoring											
Tuner-1 Data				Settings				Tuner-2			
GLOBAL	RF _{L2}	RF _{L1}	RF _{H1}	RF _{H2}	DEV	PILOT _L	PILOT	RDS _L	RDS	AUDIO _{DEV}	AUDIO _L
BLER	PI	PS	TP	TA	CT	RT	AF	EON	IH	TMC	RT ₊
ODA ₂											ODA ₁

TUNER1 - RDS CLOCK AND TIME											
Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Timeout	Max Offset	Mask	Email	Trap	Label
1	Chan1 Label	-----	100.50 MHz	10 sec	unmasked	360 sec	60 sec	unmasked	disable	enable	Tun1 Rds CT Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	130 sec	60 sec	masked	disable	disable	Tun1 Rds CT Trap 2

Under the alarm condition the RDS alarm led (we have associated the CT alarm to the panel led Rds error) on the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

Tested in Scan mode with 3 frequencies:

F1: 100.5 MHz

F2: 95.3 MHz

F3: 96.7 MHz

and Timeout=360 sec. – Max Offset=60 sec. as depicted below.

Same conditions of Static mode test. The behavior is as illustrated for PS Scan Mode test.

System cycles thru selected frequencies. At first time CT signal arrives on Channel1 radio, alarm raises up and corresponding CT field shows a red underlined text: "OFFSET ERROR".

Monitoring											
Tuner-1 Data				Settings				Tuner-2			
GLOBAL	RF _{L2}	RF _{L1}	RF _{H1}	RF _{H2}	DEV	PILOT _L	PILOT	RDS _L	RDS	AUDIO _{DEV}	AUDIO _L
BLER	PI	PS	TP	TA	CT	RT	AF	EON	IH	TMC	RT ₊
ODA ₂											ODA ₁

TUNER1 - RDS CLOCK AND TIME											
Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Timeout	Max Offset	Mask	Email	Trap	Label
1	Chan1 Label	-----	100.50 MHz	10 sec	unmasked	360 sec	60 sec	unmasked	disable	enable	Tun1 Rds CT Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	130 sec	60 sec	masked	disable	disable	Tun1 Rds CT Trap 2
3	Chan3 Label	-----	96.70 MHz	10 sec	unmasked	130 sec	60 sec	masked	disable	disable	Tun1 Rds CT Trap 3
4	Chan4 Label	-----	102.30 MHz	5 sec	unmasked	130 sec	60 sec	masked	disable	disable	Tun1 Rds CT Trap 4

Tested in SmartScan with the same setup depicted above for 'normal' Scan Mode.

If an alarm condition is found on a channel, instead of state an alarm condition, system stops on channel for a period (depending on tested service that cause alarm condition) collecting more data. In this state no alarm or Trap was reported. The Channel Memory index reports the cause(s) of the stop (see below: "1 of 3 (CT)").

TUNER-1

STEREOTUNEDRDS

Ch. Mem.	Frequency	Channel Label	Mode
1 of 3 (CT)	100.50 MHz	Chan1 Label	S-SCAN

RF

L2L1ALARMH1H2

Level	Carrier	M.Path	Adj-Chan	Alt-Chan
81.00 dBuV	-7 ppm	0.00 %	-34.00 -34.00 dBr	-64.50 dBr

DEVIATION

ALARM

MPX	Audio	Pilot	RDS
71.53 kHz	61.56 kHz	6.57 kHz	3.40 kHz

RDS DATA

ALARM

PI	BLER	PS	TP	TA			
5215	000 %	ABCRADIO	OFF	OFF			
M/S	DI	PTY	CT				
MUSIC	STEREO STATIC	JAZZ	OK				
RT	AF	EON	IH	TMC	RT+	ODA-1	ODA-2
OK	OK	OK	---	---	---	---	---

If a valid (no alarm) condition is found in this time, system unlocks and normal scan reprises.

If a new alarm condition raises up, system stops again for another observation step.

If no valid condition is found (as in this test case), system unlocks, normal scan reprises and an alarm condition and/or a trap is reported (corresponding CT field shows a red underlined text: "OFFSET ERROR"):

TUNER-1

STEREOTUNEDRDS

Ch. Mem.	Frequency	Channel Label	Mode
1 of 3	100.50 MHz	Chan1 Label	S-SCAN

RF

L2L1ALARMH1H2

Level	Carrier	M.Path	Adj-Chan	Alt-Chan
81.50 dBuV	-5 ppm	0.00 %	-36.00 -34.50 dBr	-67.00 dBr

DEVIATION

ALARM

MPX	Audio	Pilot	RDS
40.73 kHz	30.76 kHz	6.57 kHz	3.40 kHz

RDS DATA

ALARM

PI	BLER	PS	TP	TA			
5215	000 %	ABCRADIO	OFF	OFF			
M/S	DI	PTY	CT				
MUSIC	STEREO STATIC	JAZZ	OFFSET ERROR				
RT	AF	EON	IH	TMC	RT+	ODA-1	ODA-2
OK	OK	OK	---	---	---	---	---

Note that Channel Memory reports normal index display ("1 of 3").

If alarm condition persists (as in this test case), after a while the system stops again on channel and the procedure restarts (note that now the alarm condition status ON persists).

Description	Source	Time
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanCtStatusNotify	192.168.0.141	2013-11-12 13:16:10
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.141	2013-11-12 13:13:11
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanRtStatusNotify	192.168.0.141	2013-11-12 13:11:21
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2Rds.tuner2RdsPrefix.iTun2DataScanRtStatusNotify	192.168.0.141	2013-11-12 13:11:21
Source:	192.168.0.141	Timestamp: 4 hours 50 minutes 20 seconds
Trap OID:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanCtStatusNotify	
SNMP Version: 2		
Variable Bindings:		
Name:	iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0	
Value:	[TimeTicks] 4 hours 50 minutes 20 seconds (1742039)	
Name:	snmpTrapOID	
Value:	[OID] iTun1DataScanCtStatusNotify	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.ftTun1Freq.1	
Value:	[OctetString] 100.50	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.aTun1DataScanCtVal.1	
Value:	[OctetString] 12/11/2013 12:14 Lto: +01.00	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.iTun1DataScanCtStatus.1	
Value:	[Integer] alarm (1)	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.aTun1RdsSettingsCtTrapLabel.1	
Value:	[OctetString] Tun1 Rds CT Trap 1	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.iTun1RdsSettingsCtMask.1	
Value:	[Integer] unmasked (0)	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0	
Value:	[OctetString] 12/11/2013 12:14 Lto: +01.00	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0	
Value:	[Integer] 16	
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1	
Value:	[Integer] 1	
Description:	"iTun1DataScanCtStatus Notification Trap "	

The traps will be sent in the instant the alarm rises up, but CT and the time in the var-binds will be related to the first failed check.

Under the alarm condition the RDS alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

For a second branch of tests we have set Timeout to 130 sec. and stopped Radio CT transmission (no 4A groups was broadcasted).

Monitoring						Settings					
Tuner-1 Data		Tuner-2 Data		Setup		Admin		Tuner-1		Tuner-2	
Audio		Logout									
GLOBAL	RF _{L2}	RF _{L1}	RF _{H1}	RF _{H2}	DEV	PILOT _L	PILOT	RDS _L	RDS	AUDIO _{DEV}	AUDIO _L
BLER	PI	PS	TP	TA	CT	RT	AF	EON	IH	TMC	RT ₊
ODA ₂											ODA ₁
TUNER1 - RDS CLOCK AND TIME											
Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Timeout	Max Offset	Mask	Email	Trap	Label
1	Chan1 Label	----	100.50 MHz	10 sec	unmasked	130 sec	60 sec	unmasked	disable	enable	Tun1 Rds CT Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	130 sec	60 sec	masked	disable	disable	Tun1 Rds CT Trap 2

We have performed the same tests in Static Mode, Scan Mode and Smart Scan Mode as above, checking front panel visualization and leds, alarms and traps.

We've obtained the same behaviors of Test 1 with the only difference on CT alarm description:

TUNER-1

STEREO

TUNED

RDS

Ch. Mem.	Frequency	Channel Label	Mode
1	100.50 MHz	Chan1 Label	STATIC

RF

12

13

ALARM

14

15

Level	Carrier	M.Path	Adj-Chan	Alt-Chan
81.00 dBuV	-7 ppm	0.00 %	-38.62 -36.62 dBc	-67.37 dBc

DEVIATION

ALARM

MPX	Audio	Pilot	RDS
12.59 kHz	0.00 kHz	6.37 kHz	3.27 kHz

RDS DATA

ALARM

PI	BLER	PS	TP	TA			
5215	000	% ABCRADIO	OFF	OFF			
M/S	DI	PTY	CT				
MUSIC	STEREO STATIC	JAZZ	NO SERVICE				
RT	AF	EON	IH	TMC	RT+	ODA-1	ODA-2
OK	OK	OK	---	---	---	---	---

REPLAY ENABLED TRAPS

The Rds CT alarm traps are replayed with its original status, time and value. Trap Counter is normally incremented. All data and parameters are available in the MIB L3-5 to set and test this configuration.

NOTES

Timeout field can be set to 0. This avoid control check on CT signal frequency (but not CT clock precision). SMARTMODE references inside the brackets when sequencer locks missing in the scan monitor tab pages (will be fixed). TrapdateTime varbind content wrong (the CT value has been used). Will be fixed.

16.11.16 **RDS RT Data test (Tuner-1 Tuner-2)**

This test checks alarms and traps on a Radio tuned on frequency 100.5MHz that carries RadioText service.
The test was carried out on both tuners.

System can monitor RadioText service presence (modified in 0.6.5 release)

For the Static Mode test we set Timeout=60 sec. and Hold Time=10 sec.

If the RT service (2A-2B groups) will not be present for 60 sec the alarm will rise up.

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Timeout	Hold	Mask	Email	Trap	Label
1	Chan1 Label	-----	100.50 MHz	10 sec	unmasked	60 sec	10 sec	unmasked	disable	enable	Tun1 Rds RT Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	1 sec	10 sec	masked	disable	disable	Tun1 Rds RT Trap 2

Under the alarm condition the RDS alarm led (We have associated the RT alarm to the panel led Rds error) on the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

Tested in Scan mode with 3 frequencies:

F1: 100.5 MHz

F2: 95.3 MHz

F3: 96.7 MHz

and Timeout=60 sec. Hold Time=10 sec. as depicted below.

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Timeout	Hold	Mask	Email	Trap	Label
1	Chan1 Label	-----	100.50 MHz	10 sec	unmasked	60 sec	10 sec	unmasked	disable	enable	Tun2 Rds RT Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	60 sec	10 sec	masked	disable	disable	Tun2 Rds RT Trap 2
3	Chan3 Label	-----	96.70 MHz	10 sec	unmasked	60 sec	10 sec	masked	disable	disable	Tun2 Rds RT Trap 3
4	Chan4 Label	-----	102.30 MHz	5 sec	unmasked	60 sec	10 sec	masked	disable	disable	Tun2 Rds RT Trap 4

Tested in SmartScan with the same setup depicted above for 'normal' Scan Mode.

If an alarm condition is found on a channel, instead of state an alarm condition, system stops on channel for a period (depending on tested service that cause alarm condition) collecting more data. In this state no alarm or Trap was reported. The Channel Memory index reports the cause(s) of the stop (see below: "1 of 3 (RT)").

TUNER-1

STEREO

TUNED

RDS

Ch. Mem.	Frequency	Channel Label	Mode
1 of 3 (RT)	100.50 MHz	Chan1 Label	S-SCAN

RF

L2

L1

ALARM

H1

H2

Level	Carrier	M.Path	Adj.Chan	Alt.Chan
82.00 dBuV	-7 ppm	0.00 %	-34.00 -33.87 dB	-66.37 dB

DEVIATION

ALARM

MPX	Audio	Pilot	RDS
73.45 kHz	63.53 kHz	6.55 kHz	3.37 kHz

RDS DATA

ALARM

PI	BLER	PS	TP	TA			
4000	000 %	american	OFF	OFF			
M/S	DI	PTY	CT				
MUSIC	STEREO STATIC	NO_PROG	OK				
RT	AF	EON	IH	TMC	RT+	ODA-1	ODA-2
OK	NO	---	---	---	---	---	---

If a valid (no alarm) condition is found in this time, system unlocks and normal scan reprises.

If no valid condition is found, system unlocks, normal scan reprises and an alarm condition and/or a trap is reported:

TUNER-1

STEREO

TUNED

RDS

Ch. Mem.	Frequency	Channel Label	Mode
1 of 3	100.50 MHz	Chan1 Label	S-SCAN

RF

L2

L1

ALARM

H1

H2

Level	Carrier	M.Path	Adj.Chan	Alt.Chan
81.00 dBuV	-7 ppm	0.00 %	-38.00 -36.00 dB	-67.00 dB

DEVIATION

ALARM

MPX	Audio	Pilot	RDS
10.67 kHz	0.00 kHz	6.47 kHz	3.30 kHz

RDS DATA

ALARM

PI	BLER	PS	TP	TA			
4000	000 %	american	OFF	OFF			
M/S	DI	PTY	CT				
MUSIC	STEREO STATIC	NO_PROG	OK				
RT	AF	EON	IH	TMC	RT+	ODA-1	ODA-2
NO	NO	---	---	---	---	---	---

Note that Channel Memory reports normal index display ("1 of 3").

If alarm condition persists, after a while the system stops again on channel and the procedure restarts (note that now the alarm condition status ON persists).

TUNER-1

STEREO

TUNED

RDS

Ch. Mem.	Frequency	Channel Label	Mode
1 of 3 (RT)	100.50 MHz	Chan1 Label	S-SCAN

RF

L2

L3

ALARM

H1

H2

Level	Carrier	M.Path	Adj-Chan	Alt-Chan
81.00 dBuV	-7 ppm	0.00 %	-31.33 -31.00 dB	-66.00 dB

DEVIATION

ALARM

MPX	Audio	Pilot	RDS
75.30 kHz	65.36 kHz	6.57 kHz	3.37 kHz

RDS DATA

ALARM

PI	BLER	PS	TP	TA
4000	000 %	american	OFF	OFF
M/S	DI	PTY	CT	
MUSIC	STEREO STATIC	NO_PROG	OK	
RT	AF	EON	IH	TMC
NO	NO	---	---	---

Description	Source	Time
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanRtStatusNotify	192.168.0.141	2013-11-12 13:11:21
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2Rds.tuner2RdsPrefix.iTun2DataScanRtStatusNotify	192.168.0.141	2013-11-12 13:11:21

Source:	192.168.0.141	Timestamp:	4 hours 45 minutes 31 seconds	SNMP Version:	2
Trap OID:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanRtStatusNotify				
Variable Bindings:					
Name:	iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0				
Value:	[TimeTicks] 4 hours 45 minutes 31 seconds (1713134)				
Name:	snmpTrapOID				
Value:	[OID] iTun1DataScanRtStatusNotify				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1Freq.1				
Value:	[OctetString] 100.50				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.iTun1DataScanRtStatus.1				
Value:	[Integer] alarm (1)				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.aTun1RdsSettingsRtTrapLabel.1				
Value:	[OctetString] Tun1 Rds Rt Trap 1				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.iTun1RdsSettingsRtMask.1				
Value:	[Integer] unmasked (0)				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTim.0				
Value:	[OctetString] 2013-11-12 13:11:22				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0				
Value:	[Integer] 14				
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1				
Value:	[Integer] 1				
Description:	"iTun1DataScanRtStatus Notification Trap "				

The traps will be sent in the instant the alarm rises up, but RT and the time in the var-binds will be related to the first failed check.

Under the alarm condition the RDS alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

21. Rds AF data test (Tuner1-Tuner2)

This test checks alarms and traps on AF lists of a Radio tuned on frequency 100.5MHz.
The test was carried out on both tuners.

The system can monitor AF lists presence.
Tuned radio has empty AF lists so the test raises up an alarm.

For the Static Mode test we set Validation Time=20 sec. and Hold Time=15 sec.

The screenshot shows the 'Monitoring' tab with 'Tuner-2 Data' selected. The 'Settings' section has 'Tuner-2' highlighted. The 'AF' button is selected in the 'RDS' section. Below the buttons is a table titled 'TUNER2 - RDS ALTERNATIVE FREQUENCIES'.

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Validation	Hold	Mask	Email	Trap	Label
1	Chan1 Label	-----	100.50 MHz	10 sec	unmasked	20 sec	15 sec	unmasked	disable	enable	Tun2 Rds AF Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	10 sec	10 sec	masked	disable	disable	Tun2 Rds AF Trap 2

Under the alarm condition the RDS alarm led (we have associated the AF alarm to the panel led Rds error) on the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

Tested in Scan mode with 3 frequencies:

F1: 100.5 MHz

F2: 95.3 MHz

F3: 96.7 MHz

and Validation Time=20 sec. - Hold Time=15 sec. as depicted below.

The screenshot shows the 'Monitoring' tab with 'Tuner-1 Data' selected. The 'Settings' section has 'Tuner-1' highlighted. The 'AF' button is selected in the 'RDS' section. Below the buttons is a table titled 'TUNER1 - RDS ALTERNATIVE FREQUENCIES'.

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Validation	Hold	Mask	Email	Trap	Label
1	Chan1 Label	-----	100.50 MHz	10 sec	unmasked	20 sec	15 sec	unmasked	disable	enable	Tun1 Rds AF Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	10 sec	10 sec	masked	disable	disable	Tun1 Rds AF Trap 2
3	Chan3 Label	-----	96.70 MHz	10 sec	unmasked	10 sec	10 sec	masked	disable	disable	Tun1 Rds AF Trap 3
4	Chan4 Label	-----	102.30 MHz	5 sec	unmasked	10 sec	10 sec	masked	disable	disable	Tun1 Rds AF Trap 4

The behavior is similar to other tests.

Description	Source	Time
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanAFStatusNotify	192.168.0.141	2013-11-12 15:31:19
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2Rds.tuner2RdsPrefix.iTun2DataScanAFStatusNotify	192.168.0.141	2013-11-12 15:31:19
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanRTStatusNotify	192.168.0.141	2013-11-12 14:49:40
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2Rds.tuner2RdsPrefix.iTun2DataScanRTStatusNotify	192.168.0.141	2013-11-12 14:49:40
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanRTStatusNotify	192.168.0.141	2013-11-12 14:48:30
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2Rds.tuner2RdsPrefix.iTun2DataScanRTStatusNotify	192.168.0.141	2013-11-12 14:48:02
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.generalTraps.generalTrapPrefix.iActivityHeartNotify	192.168.0.141	2013-11-12 14:43:11
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanRTStatusNotify	192.168.0.141	2013-11-12 14:41:40
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2Rds.tuner2RdsPrefix.iTun2DataScanRTStatusNotify	192.168.0.141	2013-11-12 14:41:36
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanRTStatusNotify	192.168.0.141	2013-11-12 14:39:58
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2Rds.tuner2RdsPrefix.iTun2DataScanRTStatusNotify	192.168.0.141	2013-11-12 14:39:57
Source: 192.168.0.141 Timestamp: 7 hours 5 minutes 29 seconds SNMP Version: 2 Trap OID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanAFStatusNotify Variable Bindings:		
Name: iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0 Value: [TimeTicks] 7 hours 5 minutes 29 seconds (2552949)		
Name: snmpTrapOID Value: [OID] iTun1DataScanAFStatusNotify		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1Freq.1 Value: [OctetString] 100.50		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.iTun1DataScanAFStatus.1 Value: [Integer] alarm (1)		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.aTun1RdsSettingsAfTrapLabel.1 Value: [OctetString] Tun1 Rds AF Trap 1		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.iTun1RdsSettingsAfMask.1 Value: [Integer] unmasked (0)		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0 Value: [OctetString] 2013-11-12 15:31:01		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0 Value: [Integer] 51		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1 Value: [Integer] 1		
Description: "iTun1DataScanAFStatus Notification Trap "		

The traps will be sent in the instant the alarm rises up, but AF and the time in the var-binds will be related to the first failed check.

Under the alarm condition the RDS alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

In SmartScan Mode the behavior expected is the same of the normal Scanning mode because this parameter is continuous and always available on the channel.

REPLAY ENABLED TRAPS

The Rds AF alarm trap are replayed with its original status, time and value. Trap Counter is normally incremented. All data and parameters are available in the MIB L3-5 to set and test this configuration.

16.11.17 **RDS EON Data test (Tuner-1 Tuner-2)**

This test checks alarms and traps on EON of a Radio tuned on frequency 100.5MHz.
The test was carried out on both tuners.

The system can monitor EON presence on tuned radio.
In this test branch Tuned radio has no EON.

For the Static Mode test we set Timeout=20 sec. and Hold Time=15 sec.

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Timeout	Hold	Mask	Email	Trap	Label
1	Chan1 Label	-----	100.50 MHz	10 sec	unmasked	20 sec	15 sec	unmasked	disable	enable	Tun1 Rds Eon Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	60 sec	10 sec	masked	disable	disable	Tun1 Rds Eon Trap 2

Under the alarm condition the RDS alarm led on (we have associated the EON alarm to the panel led Rds error) on the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

Tested in Scan mode with 3 frequencies:

F1: 100.5 MHz

F2: 95.3 MHz

F3: 96.7 MHz

and Timeout=20 sec. - Hold Time=15 sec. as depicted below.

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Timeout	Hold	Mask	Email	Trap	Label
1	Chan1 Label	-----	100.50 MHz	10 sec	unmasked	20 sec	15 sec	unmasked	disable	enable	Tun2 Rds Eon Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	60 sec	10 sec	masked	disable	disable	Tun2 Rds Eon Trap 2
3	Chan3 Label	-----	96.70 MHz	10 sec	unmasked	60 sec	10 sec	masked	disable	disable	Tun2 Rds Eon Trap 3
4	Chan4 Label	-----	102.30 MHz	5 sec	unmasked	60 sec	10 sec	masked	disable	disable	Tun2 Rds Eon Trap 4

Description	Source	Time
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanEonStatusNotify	192.168.0.141	2013-11-13 13:22:45
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2Rds.tuner2RdsPrefix.iTun2DataScanEonStatusNotify	192.168.0.141	2013-11-13 13:22:45
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanEonStatusNotify	192.168.0.141	2013-11-13 13:21:57
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2Rds.tuner2RdsPrefix.iTun2DataScanEonStatusNotify	192.168.0.141	2013-11-13 13:21:57
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanEonStatusNotify	192.168.0.141	2013-11-13 13:16:26
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2Rds.tuner2RdsPrefix.iTun2DataScanEonStatusNotify	192.168.0.141	2013-11-13 13:16:26
trapOID: .1.3.6.1.6.3.1.1.5.1	192.168.0.141	2013-11-13 13:16:05
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanEonStatusNotify	192.168.0.141	2013-11-13 13:10:42
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2Rds.tuner2RdsPrefix.iTun2DataScanEonStatusNotify	192.168.0.141	2013-11-13 13:10:42
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanEonStatusNotify	192.168.0.141	2013-11-13 13:10:04
Source: 192.168.0.141 Timestamp: 25 minutes 7 seconds SNMP Version: 2 Trap OID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanEonStatusNotify Variable Bindings:		
Name:	.iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0	
Value:	[TimeTicks] 25 minutes 7 seconds (150771)	
Name:	snmpTrapOID	
Value:	[OID] iTun1DataScanEonStatusNotify	
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.ftun1Freq.1	
Value:	[OctetString] 100.50	
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.aTun1DataScanEonNetworkRef.1	
Value:	[OctetString] 0	
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.iTun1DataScanEonStatus.1	
Value:	[Integer] alarm (1)	
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.aTun1RdsSettingsEonTrapLabel.1	
Value:	[OctetString] Tun1 Rds Eon Trap 1	
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.iTun1RdsSettingsEonMask.1	
Value:	[Integer] unmasked (0)	
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0	
Value:	[OctetString] 2013-11-13 13:22:48	
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0	
Value:	[Integer] 7	
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1	
Value:	[Integer] 1	
Description:	"iTun1DataScanEonStatus Notification Trap "	

The traps will be sent in the instant the alarm rises up, but EON and the time in the var-binds will be related to the first failed check.

Under the alarm condition the RDS alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

In SmartScan Mode the behavior expected is the same of the normal Scanning mode because this parameter is continuous and always available on the channel.

REPLAY ENABLED TRAPS

The Rds EON alarm trap are replayed with its original status, time and value. Trap Counter is normally incremented. All data and parameters are available in the MIB L3-5 to set and test this configuration.

16.11.18 **RDS BLER Data test (Tuner-1 Tuner-2)**

This test checks alarms and traps on BLER of a Radio tuned on frequency 100.5MHz.
The test was carried out on both tuners.

The system can monitor Rds data Block Error Rate (Bler) as signal quality expressed as percents.

For the Static Mode test we set Max Bler=10% and an Hysteresis=5%, Validation Time=10 sec. and Hold Time=15 sec.

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Max	Hysteresis	Validation	Hold	Mask	Email	Trap	Label
1	Chan1 Label	-----	100.50 MHz	10 sec	unmasked	10 %	5 %	10 sec	5 sec	unmasked	disable	enable	RdsSettingsBlerTrap1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	20 %	5 %	1 sec	1 sec	masked	disable	disable	RdsSettingsBlerTrap2

Under the alarm condition the RDS alarm led on (we have associated the Bler alarm to the panel led Rds error) on the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

Tested in Scan mode with 3 frequencies:

F1: 100.5 MHz

F2: 95.3 MHz

F3: 96.7 MHz

and Timeout=20 sec. - Hold Time=15 sec. as depicted below.

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Max	Hysteresis	Validation	Hold	Mask	Email	Trap	Label
1	Chan1 Label	-----	100.50 MHz	10 sec	unmasked	10 %	5 %	10 sec	5 sec	unmasked	disable	enable	RdsSettingsBlerTrap1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	20 %	5 %	1 sec	1 sec	masked	disable	disable	RdsSettingsBlerTrap2
3	Chan3 Label	-----	96.70 MHz	10 sec	unmasked	20 %	5 %	1 sec	1 sec	masked	disable	disable	RdsSettingsBlerTrap3
4	Chan4 Label	-----	102.30 MHz	5 sec	unmasked	20 %	5 %	1 sec	1 sec	masked	disable	disable	RdsSettingsBlerTrap4

Description	Source	Time
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioTun2RightSilenceAlarmStatusNotify	192.168.0.180	2013-11-13 10:01:59
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioTun2LeftSilenceAlarmStatusNotify	192.168.0.180	2013-11-13 10:01:59
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2RfMpx.tuner2RfMpxPrefix.iTun2AudioSilenceAlarmStatusNotify	192.168.0.180	2013-11-13 10:01:59
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanBlerStatusNotify	192.168.0.180	2013-11-13 10:01:50
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2RfMpx.tuner2RfMpxPrefix.iTun2RdsLowLevelAlarmStatusNotify	192.168.0.180	2013-11-13 10:01:50
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2RfMpx.tuner2RfMpxPrefix.iTun2PilotLowLevelAlarmStatusNotify	192.168.0.180	2013-11-13 10:01:50
Source: 192.168.0.180 Timestamp: 1 hour 38 minutes 8 seconds SNMP Version: 2 Trap OID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanBlerStatusNotify Variable Bindings:		
Name: iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0 Value: [TimeTicks] 1 hour 38 minutes 8 seconds (588876)		
Name: snmpTrapOID Value: [OID] iTun1DataScanBlerStatusNotify		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1Freq.1 Value: [OctetString] 100.80		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.iTun1DataScanBler.1 Value: [Integer] 46		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.iTun1DataScanBlerStatus.1 Value: [Integer] alarm (1)		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.aTun1RdsSettingsBlerTrapLabel.1 Value: [OctetString] RdsSettingsBlerTrap1		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.iTun1RdsSettingsBlerMask.1 Value: [Integer] unmasked (0)		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0 Value: [OctetString] 2013-11-13 10:01:56		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0 Value: [Integer] 18		
Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1 Value: [Integer] 1		
Description: "iTun1DataScanBlerStatus Notification Trap "		

The traps will be sent in the instant the alarm rises up, but AF and the time in the var-binds will be related to the first failed check.

Under the alarm condition the RDS alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

In SmartScan Mode the behavior expected is the same of the normal Scanning mode because this parameter is continuous and always available on the channel.

REPLAY ENABLED TRAPS

The Rds AF alarm trap are replayed with its original status, time and value. Trap Counter is normally incremented. All data and parameters are available in the MIB L3-5 to set and test this configuration.

16.11.19 **Audio Streaming**

GPRS LINK test.

Select the streamer encoder sources. Set the Stream1 bit rate to 28Kbit/s and stereo.

AUDIO	
AUDIO-1 GLOBAL SETUP	AUDIO-2 GLOBAL SETUP
Audio1 Source	Audio2 Source
Tuner-1	Tuner-2
Audio1 Signal Name	Audio2 Signal Name
Test Audio 1	Test Audio 2
STREAM-1 GLOBAL SETUP	STREAM-2 GLOBAL SETUP
Stream1 Source Gain	Stream2 Source Gain
10.00 dB	10.00 dB
Stream1 Encoder	Stream2 Encoder
vorbis	vorbis
Stream1 BitRate	Stream2 BitRate
28kBits	128kBits
Stream1 Mode	Stream2 Mode
stereo	stereo

Select gprsBand for the HTTP Band Mode and the streamers enabled.

GENERAL SETUP	
NAME	GLOBAL SETUP
Target Name Ref	Front Panel
WOLF2MS	enabled
Target Location Ref	

Target Operator Ref	HTTP SETTINGS
http://www.axeltechnology.com/	HTTP Band Mode
	gprsBand
AUDIO IO SETTINGS	HTTP streamer auto kick out
Analogic Output mode	0
audio1source	Http Streamer Players
Analogic Output gain	enabled
0.00 dB	

Reload the web page (to be sure the gprsMode is activated) and push the play button.

AUDIO-1

ALARM

Name	Source	Peak-L	Peak-R	RMS-L	RMS-R
Test Audio 1	TUNER1	-2.1 dBr	-2.3 dBr	-7.7 dBr	-8.3 dBr

Listening AUDIO-1 (vorbis / 28kBits / stereo)

countdown OFF

AUDIO-2

ALARM

Name	Source	Peak-L	Peak-R	RMS-L	RMS-R
Test Audio 2	TUNER2	-2.0 dBr	-2.3 dBr	-7.2 dBr	-7.8 dBr

Ready

countdown OFF

In GPRS mode if one player is in listening mode the page refresh rate will be only one every six second.

In this condition the average bit rate (data + 1 stream) should be about 32 Kbit/sec.

We have focused on the point to give the best performances possible at very low bit rates (lower than 40 Kbits/sec). The encoder has a strong VBR characterization (for example at 28Kbit/sec the instant bit rate sweep from 8 to 40 Kbits/sec, with an average always less or equal 28kbytes. With a muted or simple audio (like a test tone or silence) the bit rate drops down to 8 Kbits/sec, instead with voice or music we have an average value of 28Kbit.

The IceCast server have a 48Kbytes buffer for every stream and instead every client player (VLC and so on) have a different and programmable buffer size (some time expressed in second, but often expressed in Kbytes).

In the instant of the connection, the delay line is expressed in Kbytes, so the same 48Kbytes of buffer can be 14 sec with normal music or 48 seconds in an extreme case of silenced signal.

With a 128 Kbit/sec (a more classic bit rate) we have a delay between 3 to 5 sec. The player creates another buffer locally (usually 64 Kbytes, so the final delay is a complex mixed situation about 20 seconds in the 28Kbit/s example and about 4 seconds in a 128kbits/s case).

So with a real time player is very difficult to estimate the buffer delay, but a recorder can (partially) compensate it.

The Home page players are quite simple and are intended only for occasional check tests. The behavior can be little different in Firefox or Chrome. The peak meters will be visible again in future.

In the next months will be available the OPUS codec and the VORBIS codec will be improved for the bit rates over 48 Kbits/s (full sample rate mode). The VORBIS quality at very low bit rates (under 48 Kbits/s) instead must be considered definitive. By the way the OPUS codec will give better performance only in the middle rate zone (40Kbits/s-96kbits/s), over 96Kbits the audio quality will be comparable.

16.11.20 **Note about event failure sampling**

We have a logical problem related to a group of alarms (in general all ones with the "Timeout" in place of the "Validation"). I saw in the TDF report (read too late to take an action on the release) that has been considered wrong the behavior of the timing reported in the PS trap varbinds.

TDF asked that the trap must report the time of the first event out of range and the value in that instant.

The problem is that, with some kind of alarms the failure instant (as well as the wrong sampled value) doesn't exist.

So we have only a moment in which a valid situation or condition isn't happened and that a timer is expired.

Missing this information we decided for this group of alarms to consider the old logic the only one applicable, the same one you are actually considered "KO".

So in the release 0.6.4. you'll find the same situation for "PS","CT","RT","EON" and in the next step "TMC", "RT+", "ODA1", "ODA2".

The question is:

If I'm rising an alarm because I waited 70 seconds for a 4A block, or a I waited 50 seconds for a PS sequence and my timer expired, I have only the timeout error as reference, no other values or timings. So the alarm trap time is the same of the failed timeout event .

So, or this logic is accepted or we have to define how a failure past condition (not sampled) happens. I only have the last valid event sampled and the timeout instant (nothing more between them).

For example in the CT case , I have the last valid 4A received, or for the PS the last valid completed sequence.

I can't locate future events easily because I have to consider a scanning complex situation.

In the release 0.6.5 We have modified the logic to sample the failure event in the "Timeout case". The trap will be sent at the timeout expiration but the failure time will be considered some seconds after the last valid event seen with the meaning of "After this time the service stopped to work properly". This new logic will affect the following alarms (PS,CT,RT,EON,TMC,RT+,ODA1,ODA2,IH)

16.11.21 **RDS InHouse (Tuner-1 Tuner-2)**

This test checks alarms and traps on IH service of a Radio tuned on frequency 100.5MHz.
The test was carried out on both tuners.

The system can monitor IH (6A) groups presence on tuned radio.
It can also monitor IH data flow (by monitoring content variations).

When 6A groups are not received for a certain time (selectable by Group Timeout) an error condition raises up.
If carried data don't change for a certain time (selectable by Data Timeout) an error condition raises up.

On web client IH field shows the service status:

RDS DATA				ALARM			
PI		BLER		PS		TP	TA
5215		000		% RAVENNA		ON	OFF
M/S		DI		PTY		CI	
MUSIC		STEREO STATIC		VARIED		OK	
RT	AF	EON	IH	TMC	RT+	ODA-1	ODA-2
OK	OK	---	NO SERV	---	---	---	---

If 6A groups are correctly received and data content changes (in respect of timeouts) IH field print is "OK".
When no IH service is broadcasted or the time between 6A groups exceeds Timeout, IH field print is "NO SERV".
When IH data content don't change before Timeout, IH field print is "NO DATA".

For the Static Mode test we set Data Timeout=20 sec. Group Timeout=30 sec. and Hold Time=15 sec.

Monitoring

Tuner-1 Data

Tuner-2 Data

Settings

Setup

Admin

Tuner-1

Tuner-2

Audio

Logout

GLOBAL

RF_{L2}

RF_{L1}

RF_{H1}

RF_{H2}

DEV

PILOT_L

PILOT

RDS_L

RDS

AUDIO_{DEV}

AUDIO_L

AUDIO_R

BLER

PI

PS

TP

TA

CT

RT

AF

EON

IH

TMC

RT₊

ODA₁

ODA₂

TUNER1 - RDS IN HOUSE APPLICATIONS

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Data Timeout	Group Timeout	Hold	Mask	Email	Trap	Label
1	Chan1 Label	----	100.50 MHz	10 sec	unmasked	20 sec	30 sec	10 sec	unmasked	disable	enable	Rds 1 IH Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	1 sec	1 sec	10 sec	masked	disable	disable	Rds 1 IH Trap 2

Under the alarm condition the RDS alarm led on (we have associated the IH alarm to the panel led Rds error) on the panel must be on (not flashing) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

Tested in Scan mode with 3 frequencies:

F1: 100.5 MHz

F2: 95.3 MHz

F3: 96.7 MHz

Data Timeout=20 sec. - Group Timeout=30 sec. - Hold Time=15 sec. as depicted below.

Monitoring

Tuner-1 Data

Tuner-2 Data

Settings

Setup

Admin

Tuner-1

Tuner-2

Audio

Logout

GLOBAL

RF_{L2}

RF_{L1}

RF_{H1}

RF_{H2}

DEV

PILOT_L

PILOT

RDS_L

RDS

AUDIO_{DEV}

AUDIO_L

AUDIO_R

BLER

PI

PS

TP

TA

CT

RT

AF

EON

IH

TMC

RT₊

ODA₁

ODA₂

TUNER2 - RDS IN HOUSE APPLICATIONS

Tested in SmartScan with the same setup depicted above for 'normal' Scan Mode.

If an alarm condition is found on a channel, instead of state an alarm condition, system stops on channel for a period (depending on tested service that cause alarm condition) collecting more data. In this state no alarm or Trap was reported. The Channel Memory index reports the cause(s) of the stop (see below: "1 of 3 (IH)").

TUNER-1

STEREO TUNED RDS

Ch. Mem.	Frequency	Channel Label	Mode
1 of 3 (IH)	100.50 MHz	Chan1 Label	S-SCAN

RF

L2 L1 ALARM H1 H2

Level	Carrier	M.Path	Adj-Chan	Alt-Chan
77.00 dBuV	-7 ppm	1.50 %	-35.87 -28.25 dB	-59.25 dB

DEVIATION

ALARM

MPX	Audio	Pilot	RDS
54.67 kHz	46.54 kHz	5.37 kHz	2.76 kHz

RDS DATA

ALARM

PI	BLER	PS	TP	TA			
5215	000 %	R-101	ON	OFF			
M/S	DI	PTY	CT				
MUSIC	STEREO STATIC	VARIED	OK				
RT	AF	EON	IH	TMC	RT+	ODA-1	ODA-2
OK	OK	---	---	---	---	---	---

TUNER-1

STEREO TUNED RDS

Ch. Mem.	Frequency	Channel Label	Mode
1 of 3	100.50 MHz	Chan1 Label	S-SCAN

RF

L2 L1 ALARM H1 H2

Level	Carrier	M.Path	Adj-Chan	Alt-Chan
77.25 dBuV	-7 ppm	1.12 %	-36.37 -29.50 dB	-59.12 dB

DEVIATION

ALARM

MPX	Audio	Pilot	RDS
56.74 kHz	48.63 kHz	5.38 kHz	2.73 kHz

RDS DATA

ALARM

PI	BLER	PS	TP	TA			
5215	000 %	RAVENNA	ON	OFF			
M/S	DI	PTY	CT				
MUSIC	STEREO STATIC	VARIED	OK				
RT	AF	EON	IH	TMC	RT+	ODA-1	ODA-2
OK	OK	---	NO SERV	---	---	---	---

If a valid (no alarm) condition is found in this time, system unlocks and normal scan reprises.

If no valid condition is found, system unlocks, normal scan reprises and an alarm condition and/or a trap is reported (see above).

Note that Channel Memory reports normal index display ("1 of 3").

If alarm condition persists, after a while the system stops again on channel and the procedure restarts (note that now the alarm condition status ON persists).



Description	Source	Time
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2Rds.tuner2RdsPrefix.iTun2DataScanIhStatusNotify	192.168.0.141	2013-11-26 10:50:52
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanIhStatusNotify	192.168.0.141	2013-11-26 10:50:30
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2Rds.tuner2RdsPrefix.iTun2DataScanIhStatusNotify	192.168.0.141	2013-11-26 10:50:27
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanIhStatusNotify	192.168.0.141	2013-11-26 10:50:19
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2Rds.tuner2RdsPrefix.iTun2DataScanOdaGen2StatusNo...	192.168.0.141	2013-11-26 10:29:12

Source: 192.168.0.141
 Timestamp: 1 hour 8 minutes 33 seconds
 SNMP Version: 2

Trap OID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner2Traps.tuner2Rds.tuner2RdsPrefix.iTun2DataScanIhStatusNotify

Variable Bindings:

Name:	iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0
Value:	[TimeTicks] 1 hour 8 minutes 33 seconds (411363)
Name:	snmpTrapOID
Value:	[OID] iTun2DataScanIhStatusNotify
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner2Module.tun2Data.tun2DataTable.tun2DataEntry.fTun2Freq
Value:	[OctetString] 100.50
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner2Module.tun2RdsScanData.tun2RdsScanDataTable.tun2RdsScanDataEntry.iTun2DataScanIhStatus
Value:	[Integer] alarm (1)
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner2Module.tun2Rds.tun2RdsTable.tun2RdsEntry.aTun2RdsSettingsIhTrapLabel
Value:	[OctetString] Rds 2 IH Trap 1
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner2Module.tun2Rds.tun2RdsTable.tun2RdsEntry.iTun2RdsSettingsIhMask
Value:	[Integer] unmasked (0)
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0
Value:	[OctetString] 2013-11-26 10:50:33
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0
Value:	[Integer] 24
Name:	iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner2Module.tun2Data.tun2DataTable.tun2DataEntry.tun2DataIndex
Value:	[Integer] 1

Description: "iTun2DataScanIhStatus Notification Trap "

The traps will be sent in the instant the alarm rises up, but IH and the time in the var-binds will be related to the first failed check.

Under the alarm condition the RDS alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA"). In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

REPLAY ENABLED TRAPS

The Rds IH alarm trap are replayed with its original status, time and value. Trap Counter is normally incremented. All data and parameters are available in the MIB L3-5 to set and test this configuration.

16.11.22 RDS TMC (Tuner-1 Tuner-2)

This test checks alarms and traps on Traffic Message Channel service of a Radio tuned on frequency 100.5MHz. The test was carried out on both tuners.

The system can monitor TMC registered groups presence on tuned radio. It can also monitor TMC data flow (by monitoring associated data group presence) and TMC service registration (3A groups with specific TMC AID).

When TMC data groups (usually 8A) are not received for a certain time (selectable by Timeout Data) an error condition raises up. Similarly when TMC registration groups (3A) are not received for a certain time (selectable by Timeout Reg.) an error condition raises up.

On web client TMC field shows the service status:

RDS DATA

ALARM

PI	BLER		PS		TP	TA	
5201	000	%	RAI		ON	OFF	
M/S	DI		PTY		CT		
MUSIC		STEREO STATIC		NEWS		---	
RT	AF	EON	IH	TMC	RT+	ODA-1	ODA-2
OK	OK	OK	---	OK	---	---	---

If TMC service data is correctly received (in respect of timeouts) TMC field print is "OK".

When no TMC service is broadcasted, TMC field print is "NO SERV".

When no TMC groups data are received but 3A TMC service registration groups are broadcasted, TMC field print is "NO DATA".

Finally, when no 3A TMC service registration groups are received but TMC data groups are, TMC field print is "NO REG".

For the test in Static Mode we have tuned on 100.5 MHz a radio that broadcast TMC service. We set Data Timeout=20 sec. Group Timeout=30 sec. and Hold Time=40 sec.

Monitoring

Tuner-1 Data

Tuner-2 Data

Settings

Setup

Admin

Tuner-1

Tuner-2

Audio

Logout

GLOBAL

RF_{L2}

RF_{L1}

RF_{H1}

RF_{H2}

DEV

PILOT_L

PILOT

RDS_L

RDS

AUDIO_{DEV}

AUDIO_L

AUDIO_R

BLER

PI

PS

TP

TA

CT

RT

AF

EON

IH

TMC

RT₊

ODA₁

ODA₂

TUNER1 - RDS TRAFFIC MESSAGE CHANNEL

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Timeout Reg.	Timeout Data	Hold	Mask	Email	Trap	Label
1	Chan1 Label	----	100.50 MHz	10 sec	unmasked	30 sec	20 sec	40 sec	unmasked	disable	enable	Tun1 Rds Oda TMC Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	1 sec	1 sec	10 sec	masked	disable	disable	Tun1 Rds Oda TMC Trap 2


Tested in Scan mode with 3 frequencies:

F1: 100.5 MHz

F2: 95.3 MHz

F3: 96.7 MHz

Data Timeout=20 sec. – Reg. Timeout=30 sec. - Hold Time=40 sec. as depicted below.

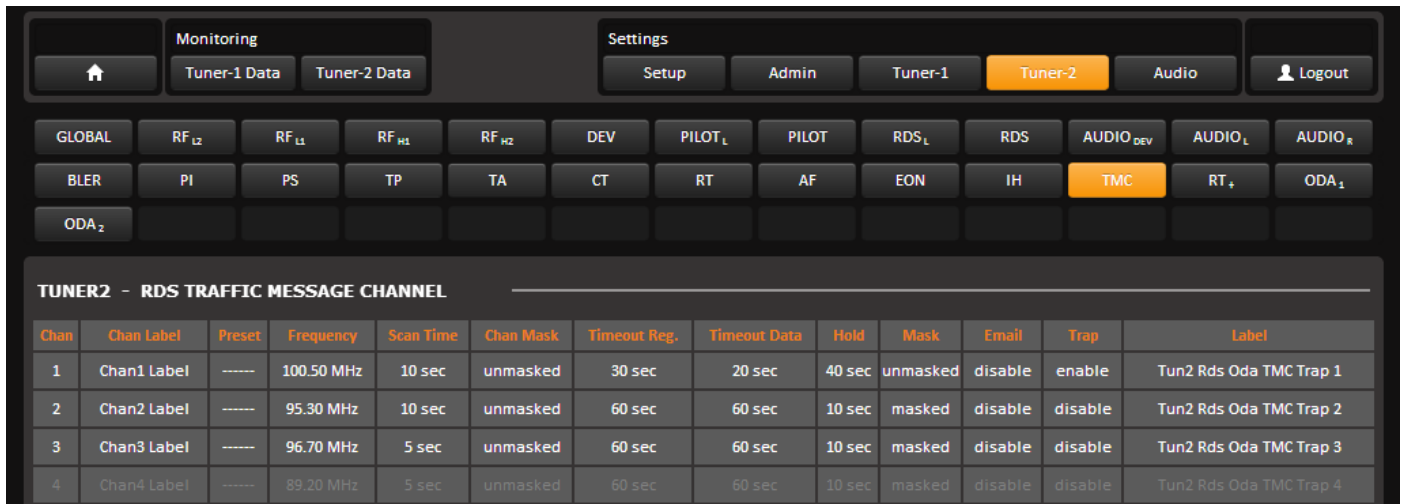

Tested in SmartScan with the same setup depicted above for 'normal' Scan Mode.

If an alarm condition is found on a channel, instead of state an alarm condition, system stops on channel for a period (depending on tested service that cause alarm condition) collecting more data. In this state no alarm or Trap was reported. The Channel Memory index reports the cause(s) of the stop (see below: "1 of 3 (TMC)").



If a valid (no alarm) condition is found in this time, system unlocks and normal scan reprises.

If no valid condition is found, system unlocks, normal scan reprises and an alarm condition and/or a trap is reported (see above).

Note that Channel Memory reports normal index display ("1 of 3").

If alarm condition persists, after a while the system stops again on channel and the procedure restarts (note that now the alarm condition status ON persists).

TUNER-2

STEREO

TUNED

RDS

Ch. Mem.	Frequency	Channel Label	Mode
1 of 3	100.50 MHz	Chan1 Label	S-SCAN

RF

L2

L1

ALARM

H3

H2

Level	Carrier	M.Path	Adj-Chan	Alt-Chan
94.00 dBuV	-2 ppm	0.00 %	-41.11 -42.22 dB	-77.66 dB

DEVIATION

ALARM

MPX	Audio	Pilot	RDS
9.28 kHz	0.00 kHz	5.40 kHz	2.72 kHz

RDS DATA

ALARM

PI	BLER	PS	TP	TA			
5215	000 %	R-101	ON	OFF			
M/S	DI	PTY	CT				
MUSIC	STEREO STATIC	VARIED	OK				
RT	AF	EON	IH	TMC	RT+	ODA-1	ODA-2
OK	OK	---	---	NO SERV	---	---	---








Description	Source	Time
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanOdaTmcStatusNotify	192.168.0.141	2013-11-26 15:09:44
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanOdaTmcStatusNotify	192.168.0.141	2013-11-26 15:07:31

Source: 192.168.0.141
 Timestamp: 5 hours 27 minutes 20 seconds
 SNMP Version: 2

Trap OID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanOdaTmcStatusNotify

Variable Bindings:

Name: .iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0
Value: [TimeTicks] 5 hours 27 minutes 20 seconds (1964054)

Name: snmpTrapOID
Value: [OID] iTun1DataScanOdaTmcStatusNotify

Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1Freq.1
Value: [OctetString] 100.50

Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.iTun1DataScanOdaTmcStatus.1
Value: [Integer] ok (0)

Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.aTun1RdsSettingsOdaTmcTrapLabel.1
Value: [OctetString] Tun1 Rds Oda TMC Trap 1

Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.iTun1RdsSettingsOdaTmcMask.1
Value: [Integer] unmasked (0)

Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0
Value: [OctetString] 2013-11-26 15:09:06

Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0
Value: [Integer] 7

Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1
Value: [Integer] 1

Description: "iTun1DataScanOdaTmcStatus Notification Trap "

The traps will be sent in the instant the alarm rises up, but TMC and the time in the var-binds will be related to a time antecedent trap signal.

Under the alarm condition the RDS alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

REPLAY ENABLED TRAPS

The Rds TMC alarm trap are replayed with its original status, time and value. Trap Counter is normally incremented. All data and parameters are available in the MIB L3-5 to set and test this configuration.

16.11.23 RDS RT+ (Tuner-1 Tuner-2)

This test checks alarms and traps on RadioText Plus service of a Radio tuned on frequency 100.5MHz. The test was carried out on both tuners.

The system can monitor RT+ registered groups presence on tuned radio. It can also monitor RT+ data flow (by monitoring associated data group presence) and RT+ service registration (3A groups with specific RT+ AID).

When RT+ data groups (usually 12A) are not received for a certain time (selectable by Timeout Data) an error condition raises up.

Similarly when RT+ registration groups (3A) are not received for a certain time (selectable by Timeout Reg.) an error condition raises up.

On web client RT+ field shows the service status:

RDS DATA

ALARM

PI		BLER	PS	TP	TA		
5215		041	% TEST	ON	OFF		
M/S		DI	PTY	CT			
MUSIC		STEREO STATIC	VARIED	OK			
RT	AF	EON	IH	TMC	RT+	ODA-1	ODA-2
OK	OK	---	---	---	OK	---	---

If RT+ service data is correctly received (in respect of timeouts) RT+ field print is "OK".

When no RT+ service is broadcasted, RT+ field print is "NO SERV".

When no RT+ groups data are received but 3A RT+ service registration groups are broadcasted, RT+ field print is "NO DATA".

Finally, when no 3A RT+ service registration groups are received but RT+ data groups are, RT+ field print is "NO REG".

For the test in Static Mode we have tuned on 100.5 MHz a radio that broadcast RT+ service.

We set Data Timeout=20 sec. Group Timeout=30 sec. and Hold Time=40 sec.

Monitoring

Home

Tuner-1 Data

Tuner-2 Data

Settings

Setup

Admin

Tuner-1

Tuner-2

Audio

Logout

GLOBAL

RF_{L2}

RF_{L1}

RF_{H1}

RF_{H2}

DEV

PILOT_L

PILOT

RDS_L

RDS

AUDIO_{DEV}

AUDIO_L

AUDIO_R

BLER

PI

PS

TP

TA

CT

RT

AF

EON

IH

TMC

RT₊

ODA₁

ODA₂

TUNER1 - RDS RADIO TEXT PLUS

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	Timeout Reg.	Timeout Data	Hold	Mask	Email	Trap	Label
1	Chan1 Label	----	100.50 MHz	10 sec	unmasked	30 sec	20 sec	40 sec	unmasked	disable	enable	Tun1 Rds Oda RTP Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	60 sec	60 sec	10 sec	masked	disable	disable	Tun1 Rds Oda RTP Trap 2


Tested in Scan mode with 3 frequencies:

F1: 100.5 MHz

F2: 95.3 MHz


F3: 96.7 MHz

Data Timeout=20 sec. – Reg. Timeout=30 sec. - Hold Time=40 sec. as depicted below.

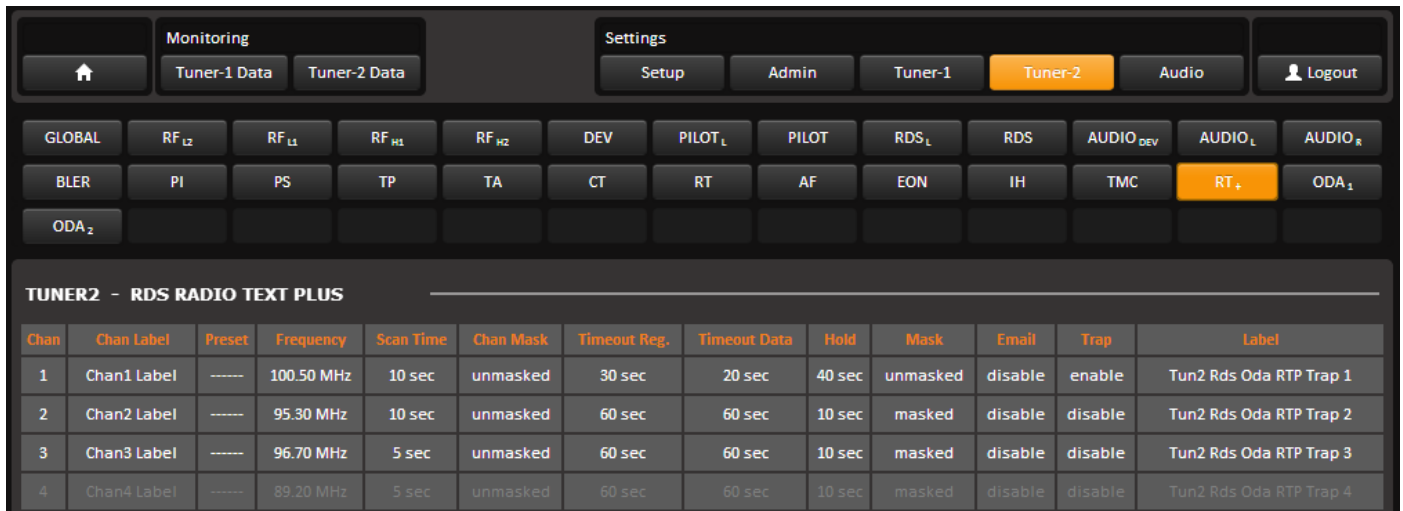

Tested in SmartScan with the same setup depicted above for 'normal' Scan Mode.

If an alarm condition is found on a channel, instead of state an alarm condition, system stops on channel for a period (depending on tested service that cause alarm condition) collecting more data. In this state no alarm or Trap was reported. The Channel Memory index reports the cause(s) of the stop (see below: "1 of 3 (RTP)").

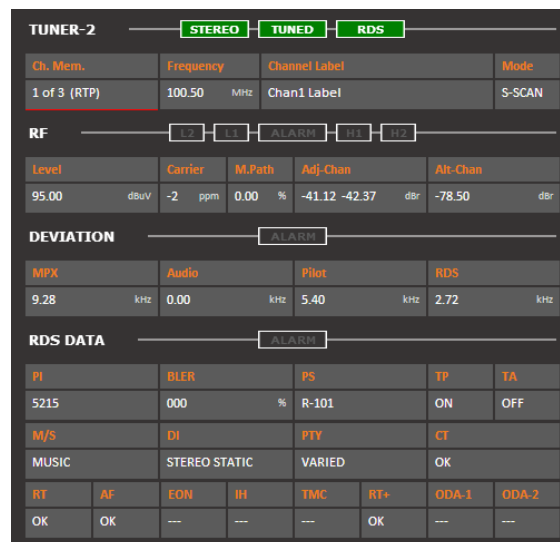

If a valid (no alarm) condition is found in this time, system unlocks and normal scan reprises.

If no valid condition is found, system unlocks, normal scan reprises and an alarm condition and/or a trap is reported (see above).

Note that Channel Memory reports normal index display ("1 of 3").

If alarm condition persists, after a while the system stops again on channel and the procedure restarts (note that now the alarm condition status ON persists).

TUNER-2

STEREO

TUNED

RDS

Ch. Mem.	Frequency	Channel Label	Mode
1 of 3	100.50 MHz	Chan1 Label	S-SCAN

RF

L2

L1

ALARM

RT

RT+

Level	Carrier	M.Path	Adj.Chan	Alt.Chan
94.00 dBuV	-2 ppm	0.00 %	-41.00 -42.00 dB	-77.00 dB

DEVIATION

ALARM

MPX	Audio	Pilot	RDS
9.51 kHz	0.00 kHz	5.40 kHz	2.72 kHz

RDS DATA

ALARM

PI	BLER	PS	TP	TA
5215	000 %	RAVENNA	ON	OFF
M/S	DI	PTY	CT	
MUSIC	STEREO STATIC	VARIED	OK	
RT	AF	EON	IH	TMC
OK	OK	---	---	---
			RT+	ODA-1
			NO DATA	ODA-2

Description	Source	Time
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanOdaRtpStatusNotify	192.168.0.141	2013-11-26 15:59:29
Source: 192.168.0.141 Timestamp: 6 hours 17 minutes 6 seconds SNMP Version: 2		
Trap OID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanOdaRtpStatusNotify		
Variable Bindings:		
Name: .iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0 Value: [TimeTicks] 6 hours 17 minutes 6 seconds (2262655)		
Name: snmpTrapOID Value: [OID] iTun1DataScanOdaRtpStatusNotify		
Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.ftun1Freq.1 Value: [OctetString] 100.50		
Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.iTun1DataScanOdaRtpStatus.1 Value: [Integer] alarm (1)		
Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.aTun1RdsSettingsOdaRtpTrapLabel.1 Value: [OctetString] Tun1 Rds Oda RTP Trap 1		
Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.iTun1RdsSettingsOdaRtpMask.1 Value: [Integer] unmasked (0)		
Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0 Value: [OctetString] 2013-11-26 15:59:11		
Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0 Value: [Integer] 2		
Name: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1 Value: [Integer] 1		
Description: "iTun1DataScanOdaRtpStatus Notification Trap "		

The traps will be sent in the instant the alarm rises up, but RT+ and the time in the var-binds will be related to a time antecedent trap signal.

Under the alarm condition the RDS alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA").

In case of more errors on the related Trap channel, they will rotate for about 30 seconds in a sequence carousel.

REPLAY ENABLED TRAPS

The Rds RT+ alarm trap are replayed with its original status, time and value. Trap Counter is normally incremented. All data and parameters are available in the MIB L3-5 to set and test this configuration.

16.11.24 **RDS ODA-1 ODA-2 (Tuner-1 Tuner-2)**

This test checks alarms and traps on ODA services of a Radio tuned on frequency 100.5MHz.
The test was carried out on both tuners and performed on each ODA service.

The system can monitor either two user specific registered ODA services on tuned radio.
Control parameters are similar to those one of TMC and RT+. In addition we found an input mask for the Application ID (AID) related to each ODA service (a four digit hexadecimal field).

Alarm conditions raise up as we've seen in TMC and RT+ tests. Moreover, like as for TMC and RT+, data prints (e.g. "NO DATA", "NO REG", etc.) follow the same rules.

For the test in Static Mode we have tuned on 100.5 MHz a radio that broadcast an ODA1 service with AID=5A14.
We set Data Timeout=20 sec. Group Timeout=30 sec. and Hold Time=40 sec.

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	AID	Timeout Reg.	Timeout Data	Hold	Mask	Email	Trap	Label
1	Chan1 Label	----	100.50 MHz	10 sec	unmasked	5A14	30 sec	20 sec	40 sec	unmasked	disable	enable	Tun1 Rds Oda Gen1 Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	ABCD	60 sec	60 sec	10 sec	masked	disable	disable	Tun1 Rds Oda Gen1 Trap 2

Tested in Scan mode with 3 frequencies:

F1: 100.5 MHz

F2: 95.3 MHz

F3: 96.7 MHz

AID=5A14 - Data Timeout=20 sec. – Reg. Timeout=30 sec. - Hold Time=40 sec. as depicted below.

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	AID	Timeout Reg.	Timeout Data	Hold	Mask	Email	Trap	Label
1	Chan1 Label	----	100.50 MHz	10 sec	unmasked	5A14	30 sec	20 sec	40 sec	unmasked	disable	enable	Tun1 Rds Oda Gen1 Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	0000	60 sec	60 sec	10 sec	masked	disable	disable	Tun1 Rds Oda Gen1 Trap 2
3	Chan3 Label	-----	96.70 MHz	10 sec	unmasked	0000	60 sec	60 sec	10 sec	masked	disable	disable	Tun1 Rds Oda Gen1 Trap 3

Tested in SmartScan with the same setup depicted above for 'normal' Scan Mode.

If an alarm condition is found on a channel, instead of state an alarm condition, system stops on channel for a period (depending on tested service that cause alarm condition) collecting more data. In this state no alarm or Trap was reported. The Channel Memory index reports the cause(s) of the stop (see below: "1 of 3 (ODA1)").

TUNER-1

STEREO

TUNED

RDS

Ch. Mem.

Frequency

Channel Label

Mode

1 of 3 (ODA1)

100.50 MHz

Chan1 Label

S-SCAN

RF

L2

L1

ALARM

H1

H2

Level

Carrier

M.Path

Adj-Chan

Alt-Chan

68.00 dBuV

-7 ppm

5.75 %

-29.62 -19.75 dB

-50.50 dB

DEVIATION

ALARM

MPX

Audio

Pilot

RDS

18.86 kHz

0.00 kHz

5.39 kHz

2.46 kHz

RDS DATA

ALARM

PI

BLER

PS

TP

TA

5215

007 %

R-101

ON

OFF

M/S

DI

PTY

CT

MUSIC

STEREO STATIC

VARIED

OK

RT

AF

EON

IH

TMC

RT+

ODA-1

ODA-2

OK

OK

OK

If a valid (no alarm) condition is found in this time, system unlocks and normal scan reprises.

If no valid condition is found, system unlocks, normal scan reprises and an alarm condition and/or a trap is reported (see above).

Note that Channel Memory reports normal index display ("1 of 3").

If alarm condition persists, after a while the system stops again on channel and the procedure restarts (note that now the alarm condition status ON persists).

TUNER-1									
		STEREO		TUNED		RDS			
Ch. Mem.		Frequency		Channel Label				Mode	
1 of 3		100.50 MHz		Chan1 Label				S-SCAN	
RF									
		L2		L1		ALARM		H1 R2	
Level		Carrier		M.Path		Adj-Chan		Alt-Chan	
64.00 dBuV		-7 ppm		7.00 %		-27.00 -19.00 dB		-46.00 dB	
DEVIATION									
		ALARM							
MPX		Audio		Pilot		RDS			
17.76 kHz		0.00 kHz		5.37 kHz		2.49 kHz		kHz	
RDS DATA									
		ALARM							
PI		BLER		PS		TP		TA	
5215		013		% TEST		ON		OFF	
M/S		DI		PTY		CT			
MUSIC		STEREO STATIC		VARIED		OK			
RT		AF		EON		IH		TMC	
OK		OK		---		---		---	
						RT+		ODA-1 ODA-2	
								NO SERV ---	

Description	Source	Time
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanOdaGen1StatusNotify	192.168.0.141	2013-11-27 10:00:44
trapOID: .iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanOdaGen1StatusNotify	192.168.0.141	2013-11-27 09:59:48

Source:	192.168.0.141	Timestamp:	28 minutes 22 seconds	SNMP Version:	2
Trap OID:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.tuner1Traps.tuner1Rds.tuner1RdsPrefix.iTun1DataScanOdaGen1StatusNotify				
Variable Bindings:					
Name:	.iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0				
Value:	[TimeTicks] 28 minutes 22 seconds (170252)				
Name:	snmpTrapOID				
Value:	[OID] iTun1DataScanOdaGen1StatusNotify				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.fTun1Freq.1				
Value:	[OctetString] 100.50				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1RdsScanData.tun1RdsScanDataTable.tun1RdsScanDataEntry.iTun1DataScanOdaGen1Status.1				
Value:	[Integer] alarm (1)				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.aTun1RdsSettingsOdaGen1TrapLabel.1				
Value:	[OctetString] Tun1 Rds Oda Gen1 Trap 1				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Rds.tun1RdsTable.tun1RdsEntry.iTun1RdsSettingsOdaGen1Mask.1				
Value:	[Integer] unmasked (0)				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0				
Value:	[OctetString] 2013-11-27 09:59:51				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0				
Value:	[Integer] 5				
Name:	.iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.tuner1Module.tun1Data.tun1DataTable.tun1DataEntry.tun1DataIndex.1				
Value:	[Integer] 1				
Description: "iTun1DataScanOdaGen1Status Notification Trap "					

The traps will be sent in the instant the alarm rises up, and ODA and the time in the var-binds will be related to the time the alarm rises up (this is due to a problem of implementation that will be fixed as soon as possible). Under the alarm condition the RDS alarm led on the panel must be on (flashing if the alarms are more than one on the channel list) and clicking on the channel number of the correspondent tuner the RDS error will be displayed ("RDS DATA"). In case of more errors on the related channel, they will rotate for about 30 seconds in a sequence carousel.

The same tests are performed on ODA2 with this configuration:

For the test in Static Mode we have tuned on 100.5 MHz a radio that broadcast an ODA2 service with AID=73B0. We set Data Timeout=20 sec. Group Timeout=30 sec. and Hold Time=40 sec.

Monitoring

Tuner-1 Data

Tuner-2 Data

Settings

Setup

Admin

Tuner-1

Tuner-2

Audio

Logout

GLOBAL

RF_{L2}

RF_{L1}

RF_{H1}

RF_{H2}

DEV

PILOT_L

PILOT

RDS_L

RDS

AUDIO_{DEV}

AUDIO_L

AUDIO_R

BLER

PI

PS

TP

TA

CT

RT

AF

EON

IH

TMC

RT₊

ODA₁

ODA₂

TUNER1 - RDS GENERIC ODA 2

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	AID	Timeout Reg.	Timeout Data	Hold	Mask	Email	Trap	Label
1	Chan1 Label	----	100.50 MHz	10 sec	unmasked	73B0	30 sec	20 sec	40 sec	unmasked	disable	enable	Tun1 Rds Oda Gen2 Trap 1

Tested in Scan mode and Smart Scan Mode with 3 frequencies:

F1: 100.5 MHz

F2: 95.3 MHz

F3: 96.7 MHz

AID=73B0 - Data Timeout=20 sec. – Reg. Timeout=30 sec. - Hold Time=40 sec. as depicted below.

Monitoring

Tuner-1 Data

Tuner-2 Data

Settings

Setup

Admin

Tuner-1

Tuner-2

Audio

Logout

GLOBAL

RF_{L2}

RF_{L1}

RF_{H1}

RF_{H2}

DEV

PILOT_L

PILOT

RDS_L

RDS

AUDIO_{DEV}

AUDIO_L

AUDIO_R

BLER

PI

PS

TP

TA

CT

RT

AF

EON

IH

TMC

RT₊

ODA₁

ODA₂

TUNER1 - RDS GENERIC ODA 2

Chan	Chan Label	Preset	Frequency	Scan Time	Chan Mask	AID	Timeout Reg.	Timeout Data	Hold	Mask	Email	Trap	Label
1	Chan1 Label	-----	100.50 MHz	10 sec	unmasked	7380	30 sec	20 sec	40 sec	unmasked	disable	enable	Tun1 Rds Oda Gen2 Trap 1
2	Chan2 Label	-----	95.30 MHz	10 sec	unmasked	0000	60 sec	60 sec	10 sec	masked	disable	disable	Tun1 Rds Oda Gen2 Trap 2
3	Chan3 Label	-----	96.70 MHz	10 sec	unmasked	0000	60 sec	60 sec	10 sec	masked	disable	disable	Tun1 Rds Oda Gen2 Trap 3
4	Chan4 Label	-----	102.30 MHz	5 sec	unmasked	0000	60 sec	60 sec	10 sec	masked	disable	disable	Tun1 Rds Oda Gen2 Trap 4

16.11.25 **SMTP**

If an SMTP server is specified and at least one valid email is available, the wolf2ms SMTP client will try to send a group of notification to the addresses.

All alarms enabled and with the email parameter enabled will be collected with the following logic:

After the first notification, before compiling the email the client waits from 30 to 120 seconds to get more notification possible.

After 30 seconds without any other notification or a max of 120 second with sporadic notifications it tries to send the email.

Actually only SMTP connection without authentication are supported.

To disable the service write 000.000.000.000 in the SMTP server Ip address field. Only a server with the standard default port 25 are supported.

SMTP SETTING	
SMTP Server Ip Address	79.25.96.13
122.34.56.78	Auto Request Time
SMTP Server User Name	5
-----	Failure Trap
SMTP Server Password	trapEnable
-----	Failure Email
SMTP eMail 1 Address	emailDisable
mauro.chimenti@audiodevices.com	Local Time Set
SMTP eMail 2 Address	----
sebastiano.bazzano@gmail.com	Local Time Zone Definition
SMTP eMail 3 Address	paris
christian.sighinolfi@axeltechnology.com	FTP SETTING
SMTP eMail 4 Address	Log File
mauro.chimenti@gmail.com	disable

Da WOLF2M5 <wolf2ms@axeltechnology.com>

Rispondi
Rispondi a tutti
Inoltra
Archivia
Indesiderata
Elimina

Oggetto **[Wolf2ms Alarm Notification] Name: WOLF2M5, Location: pietrasanta(lucca) 55045**
11.10

A Mauro Chimenti, Sebastiano Bazzano, Christian Sighinolfi, 'mauro chimenti'
Altre azioni

```

TUNER1: Notification List

TUNER1-RDS BLER -- Chan=0, Freq=100.80MHz, Bler=---, AlarmStatus=1, EventTime=2013-11-26 11:09:42
TUNER1-AUDIODEV -- Chan=0, Freq=100.80MHz, AudioLev= --- kHz (Not Tuned), AlarmStatus=1, EventTime=2013-11-26 11:09:42
TUNER1-RFL2 ---- Chan=0, Freq=100.80MHz, RFLevel=-5.00dBuv, AlarmStatus=1, EventTime=2013-11-26 11:09:42
TUNER1-RFL1 ---- Chan=0, Freq=100.80MHz, RFLevel=-5.00dBuv, AlarmStatus=1, EventTime=2013-11-26 11:09:42
TUNER1-DEV ---- Chan=0, Freq=100.80MHz, Deviation= --- kHz (Not Tuned), AlarmStatus=1, EventTime=2013-11-26 11:09:42
TUNER1-PILOT ---- Chan=0, Freq=100.80MHz, PilotLevel= --- kHz (Not Tuned), AlarmStatus=1, EventTime=2013-11-26 11:09:42
TUNER1-LOWPILOT -- Chan=0, Freq=100.80MHz, PilotLevel= --- kHz (Not Tuned), AlarmStatus=1, EventTime=2013-11-26 11:09:42
TUNER1-RDSLEV ---- Chan=0, Freq=100.80MHz, RdsLevel= --- kHz (Not Tuned), AlarmStatus=1, EventTime=2013-11-26 11:09:42
TUNER1-LOWRDS ---- Chan=0, Freq=100.80MHz, RdsLevel= --- kHz (Not Tuned), AlarmStatus=1, EventTime=2013-11-26 11:09:42

-----

TUNER2: Notification List

TUNER2-PILOT ---- Chan=0, Freq=100.80MHz, PilotLevel= --- kHz (Not Tuned), AlarmStatus=1, EventTime=2013-11-26 11:09:42
TUNER2-LOWRDS ---- Chan=0, Freq=100.80MHz, RdsLevel= --- kHz (Not Tuned), AlarmStatus=1, EventTime=2013-11-26 11:09:42

-----

AUDIO1: Notification List

AUDIO1-LEFT SIL -- Source=Tuner1, LeftLev=-90.00dB, AlarmStatus=1, EventTime=2013-11-26 11:09:42
AUDIO1-RIGHT SIL-- Source=Tuner1, RightLev=-90.00dB, AlarmStatus=1, EventTime=2013-11-26 11:09:42

-----

AUDIO2: Notification List



AUDIO2-LEFT SIL -- Source=Tuner2, LeftLev=-90.00dB, AlarmStatus=1, EventTime=2013-11-26 11:09:42
AUDIO2-RIGHT SIL-- Source=Tuner2, RightLev=-90.00dB, AlarmStatus=1, EventTime=2013-11-26 11:09:42

-----

```

16.11.26 **RDS Streaming**

Selecting a source for the RDS data stream, the RS232 serial port will start to stream all groups decoded. The RS232 serial port is configured as 9600 Baud, 8 data bit, 1 Stop Bit, no Parity.

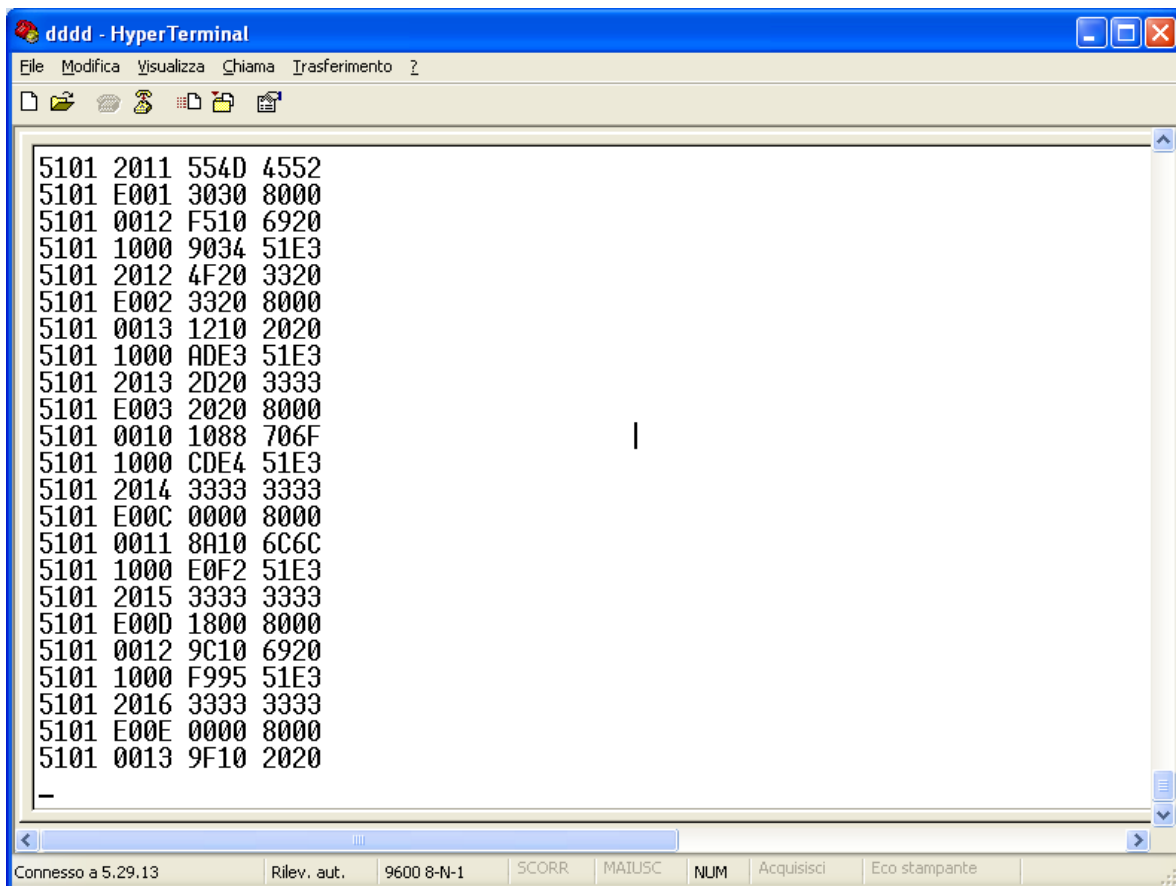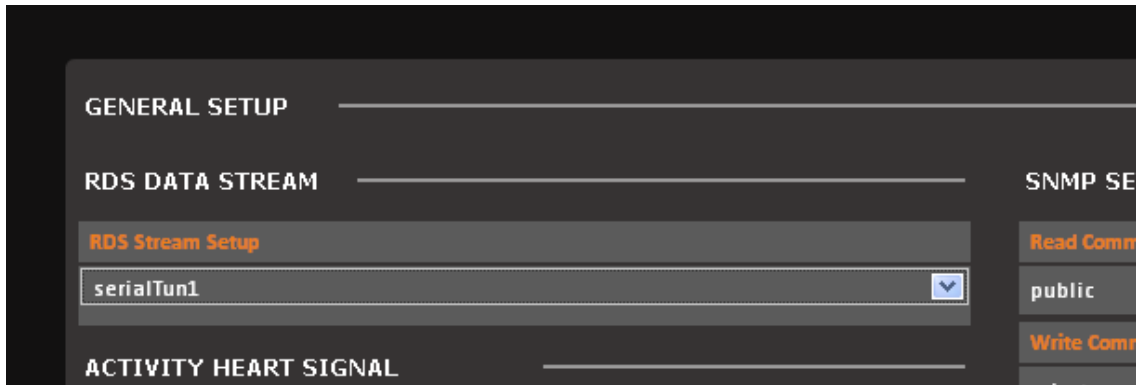

16.11.27 **Traps and email notification with analogical or digital inputs**

Selecting as audio source one of the inputs and programming the audio configuration will be possible to monitor and measure level of the inputs signal as well as receive traps and email notifications with the general rules already seen.

AUDIO

AUDIO-1 GLOBAL SETUP

Audio1 Source

Analogic ▼

Audio1 Signal Name

Test Audio 1

AUDIO-2 GLOBAL SETUP

Audio2 Source

Digital ▼

Audio2 Signal Name

Test Audio 2

ANALOG INPUT SILENCE SETUP

Audio Analog Left Silence Trap Label

AudioTrap

Audio Analog Left Silence Thr

-20.00 dBr ▼

Audio Analog Left Silence Time

20 sec ▼

Audio Analog Left Silence Hold

2 sec ▼

Audio Analog Left Silence Mask

unmasked ▼

Audio Analog Left Silence Email Enable

enabled ▼

Audio Analog Left Silence Trap Enable

enabled ▼

Audio Analog Right Silence Trap Label

AudioTrap

Audio Analog Right Silence Thr

-21.00 dBr ▼

Audio Analog Right Silence Time

19 sec ▼

Audio Analog Right Silence Hold

2 sec ▼

Audio Analog Right Silence Mask

unmasked ▼

Audio Analog Right Silence Email Enable

disabled ▼

Audio Analog Right Silence Trap Enable

enabled ▼

DIGITAL INPUT SILENCE SETUP

Audio Digital Left Silence Trap Label

AudioTrap

Audio Digital Left Silence Thr

-20.00 dBr ▼

Audio Digital Left Silence Time

20 sec ▼

Audio Digital Left Silence Hold

2 sec ▼

Audio Digital Left Silence Mask

unmasked ▼

Audio Digital Left Silence Email Enable

enabled ▼

Audio Digital Left Silence Trap Enable

disabled ▼

Audio Digital Right Silence Trap Label

AudioTrap

Audio Digital Right Silence Thr

-20.00 dBr ▼

Audio Digital Right Silence Time

20 sec ▼

Audio Digital Right Silence Hold

2 sec ▼

Audio Digital Right Silence Mask

masked ▼

Audio Digital Right Silence Email Enable

disabled ▼

Audio Digital Right Silence Trap Enable

disabled ▼

iReasoning MIB Browser

File Edit Operations Tools Bookmarks Help

Address: 192.168.0.180 Advanced... OID: .1.3 Operations: Get Next Go

SNMP MIB MIB Tree iso

Result Table Trap Receiver

Operations Tools

Description	Source	Time
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioAnalogLeftSilenceAlarmStatusNotify	192.168.0.180	2013-11-27 11:57:03
trapOID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioAnalogRightSilenceAlarmStatusNotify	192.168.0.180	2013-11-27 11:57:02

Source: 192.168.0.180 Timestamp: 1 hour 25 minutes 14 seconds SNMP Version: 2

Trap OID: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.modules.audioTraps.audioTrapPrefix.iAudioAnalogRightSilenceAlarmStatusNotify

Variable Bindings:

Name: iso.org.dod.internet.mgmt.mib-2.system.sysUpTime.0
Value: [TimeTicks] 1 hour 25 minutes 14 seconds (511446)

Name: snmpTrapOID
Value: [OID] iAudioAnalogRightSilenceAlarmStatusNotify

Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.generalSettings.inoutSettings.fAnalogicInputReference.0
Value: [OctetString] 0.00

Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioData.audioAnalogDataTable.audioAnalogDataEntry.fAudioAnalogRightRms.1
Value: [OctetString] -80.00

Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioSettings.audioAnalogSetupTable.audioAnalogSetupEntry.aAudioAnalogLeftSilenceTrapLabel.1
Value: [OctetString] AudioTrap

Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioData.audioAnalogDataTable.audioAnalogDataEntry.iAudioAnalogLeftSilenceAlarmStatus.1
Value: [Integer] alarm (1)

Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioSettings.audioAnalogSetupTable.audioAnalogSetupEntry.iAudioAnalogLeftSilenceMask.1
Value: [Integer] unmasked (0)

Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.aTrapDateTime.0
Value: [OctetString] 2013-11-27 11:55:53

Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.wolf2msTraps.iTrapCounter.0
Value: [Integer] 183

Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioData.audioAnalogDataTable.audioAnalogDataEntry.audioAnalogDataIndex.1
Value: [Integer] 1

Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioSettings.audio1Setup.iAudio1Source.0
Value: [Integer] analogic (3)

Name: iso.org.dod.internet.private.enterprises.axelTech.monitorsFm.wolf2MS.audioModule.audioSettings.audio2Setup.iAudio2Source.0
Value: [Integer] digital (2)

Description: "AudioAnalogRightSilenceAlarmStatus Notification Trap "

16.11.28 **Format and Import/Export configuration**

Available in the front panel display a group of new functions to handle the SD card.



Please before starting any operation format again it. The SD card will be formatted with the EXT3 file system. This file system is not Microsoft windows compatible (so the SD card will be read only inside linux systems), but more robust respect the old FAT32.

If Wolf2ms find a FAT32 file system (or another one different from EXT3) doesn't allow to operate.


Selecting the "export" function the configuration will be exported in the SD card.
Selecting the "import" function the configuration will be imported from the SD card.

Automatically Wolf2ms "export" the configuration in the SD card after about 20 minutes every parameter changes and/or after 20 minutes the startup.
That means in the SD card should be always available the a configuration, manually or automatically saved.


Inserting a different SD in a wolf2ms , will be available 20 minutes to Import the SD card configuration (after this time Wolf2ms will rewrite on it its one).



The logical status of the input/output is visible in the Home page of the WebPage

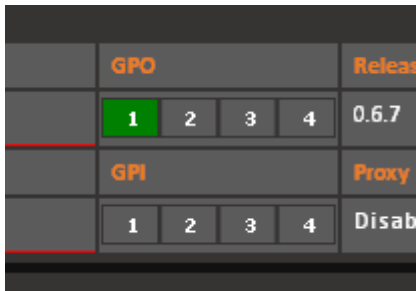

Note: The numeration displayed in the Home Page is wrong will be fixed (the right one will be 0,1,2,3)

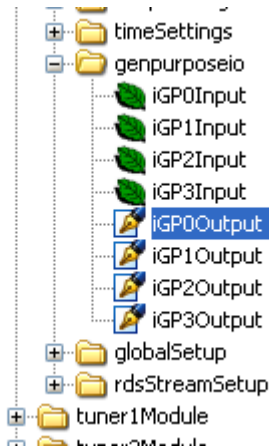

In the MIB will be possible to read the inputs status and read or write the GPO status.



The current status of the GPI/GPO is available even in the display panel

17 TECHNICAL SPECIFICATION WOLF 2MS

PARAMETER	DESCRIPTION
Main Power	100 Vac – 240 Vac 50/60 Hz internal, universal power supply
Power consumption	25 W
Power connector	IEC plug filter with internal fuse 2.0 AT
Headphone	Stereo Jack 6.3 mm
Safety and EMC	Compliant to CE laws
Working temperature	0° to 50° C (storage -5 to + 50 °C)
Housing Dimensions	19 inch x 1u x 240 mm (depth)
Weight	3.5 kg
RF TUNERS	
Tuner frequency	87.5 MHz - 108.0 MHz
Tuner step	10 kHz
RF tuning stability	+/- 500 Hz
RF input sensitivity	20 to 120 dBµV
RF input nominal level	80 to 100 dBµV
RF inputs main	2x BNC, with 50 Ohm unbalanced
Max frequency deviation	125 kHz
IF Filter bandwidth	34 kHz to 138 kHz – Manual or Automatic
Input RF level	30 dBµV – 120 dBµV with Internal attenuator
Bandscan carrier number	32 Channels
Bandscan time	Static Mode, Scan 1s to 10s and Smart Mode*
Selectivity at ± 120 kHz	>-3 dB
Selectivity at ± 200 kHz	>-40 dB
Selectivity at ± 300 kHz	>-50 dB
Selectivity at ± 400 kHz	>-65 dB
Image Rejection @ 22.5 kHz	70 dB
Adjacent channel rejection	63 - 65 dB
Alternate channel rejection	65 - 72 dB
THD @ dev=75 kHz	0.05 – 0.1 %
Mono (S+N)/N	75 dB typ – 68 dB min (No A-Weighting 30 Hz – 15 kHz)
STEREO DECODERS	
Stereo (S+N)/N	70 dB typ – 64 dB min (No A-Weighting 30 Hz – 15 kHz) • 40 dBµV – 61 dB Stereo/61 dB Mono • 50 dBµV – 69 dB Stereo/72 dB Mono • 60 dBµV – 78 dB Stereo/78 dB Mono • 70 dBµV – 83 dB Stereo/85 dB Mono
Pilot 19kHz suppression	55 dB (Stereo modulation L = 1, R = 0, Deviation=67.5 kHz, pilot deviation=6.75 kHz)
Stereo THD+N	0.1 % - 0.2 % (Stereo modulation L = 1, R = 0, Deviation=67.5 kHz, pilot deviation=6.75 kHz) Measures @ 70 dBuV with 75 kHz • 100 Hz - 0.055 % • 1 kHz - 0.061 % • 5 kHz - 0.19 % • 10 kHz - 0.46 %
Stereo separation	45 dB (Stereo modulation L = 1, R = 0, Deviation=67.5 kHz, pilot deviation=6.75 kHz) • 400 Hz – 48 dB • 1 kHz – 48 dB • 5 kHz – 48 dB • 10 kHz – 38 dB • 14.7 kHz – 38 dB

RDS DECODER	
RDS Sensitivity	20 dBμV (dev f = 2 kHz, RDS BLER < 5%)
RDS Synchronization time	80 ms (dev f = 2 kHz RF input = 60 dBμV)
RDS PI Lock time	100 ms (dev f = 2 kHz RF input = 60 dBμV)
RDS data decoding and Streaming	RDS Level indication and deviation (voltage, kHz and dBr)
RDS Data decoding services	PS, PI, M/S, DI, TP, TA, AF, AF List Presence A/B Method, Scrolling PS, AF EON, RadioText, RadioText Plus, CT, PTY, PIN, IH, TMC, EWS, TDC . ODA generic services. RDS error detection with three shold adjustable
RF MEASUREMENT MODULE	
Ranges – Resolution - Precision	
RF Level	0 – 80 dBμV (Resolution 1 dBμV, precision 2 dBμV) 82 – 120 dBμV (Resolution 2 dBμV, precision 5 dBμV)
Deviation	0-125 kHz (Resolution 1 kHz, precision 2 kHz)
Tuned Carrier Frequency Offset	0-250 ppm (Resolution 2 ppm, precision 5 ppm)
Multipath	0-100 %
Adjacent Channel RF Level	0 – 80 dBμV (Resolution 1 dBμV, precision 2 dBμV) (+-200kHz)
MPX MEASUREMENT MODULE	
Ranges – Resolution - Precision	
Pilot Level	0-20 kHz (Resolution 0.1 kHz, precision 0.2 kHz)
Rds Level	0-20 kHz (Resolution 0.1 kHz, precision 0.2 kHz)
Mpx Power ITU-R-BS412	-20 dBr to + 12dBr (Resolution 0.1 dBr, precision 0.2 dBr)
Stereo	Valid Stereo signal detector
AUDIO MEASUREMENT MODULE	
Ranges – Resolution – Precision	
Left Quasi Peak	Programmable Attack Time from 0 mS to 2mS (Resolution 0.1 dB)
Right Quasi Peak	Programmable Attack Time from 0 mS to 2mS (Resolution 0.1 dB)
Audio Silence	Threshold -80 dB to 0 dB, Time: 1-120 Sec
Unbalanced Stereo Signal	Threshold -80 dB to 0 dB, Time: 1-120 Sec
AUDIO OUTPUT	
Available output on XLR	Tuner-1 or Tuner-2, definable via web page. Same audio on Analog and AES/EBU
Audio frequency response	30 Hz—15 kHz, ± 0,3 dB
Phones (Front Panel)	Stereo jack 6.3 mm, 150 Ohm, 0.8 W
ANALOG OUTPUT MODULE	
D/A Conversion	24bit Sigma-Delta Conversion – 32 kHz Sample rate
Connectors	2x XLR, male - Electronically balanced
Output Level	-12.0 dBu to +14.0 dBu (0.1 dBu Step) – Max (+20 dBu)
Impedance Source	47 Ω
Load Impedance	600 Ω or greater
Distorsion	Less than 0.02% TDH+Noise (0.0dBu @ 1Khz)
Dynamic range	108 dB (110 dB A-weighted, 20Hz – 15kHz)
Sources	Streamer1_Source , Streamer2_Source
DIGITAL OUTPUT MODULE	
Connectors:	XLR, Male – Electronically balanced
Format	AES3/EBU
Sample rates	32 kHz
Resolution	24 bits
Operative Nominal level:	From 0.0 dBFs to -24dBFs (0.1 dBu step)
Dynamic Range:	125 dB (Typ), 122 dB (Min)
Distortion	less than 0.01% TDH+NOISE (-20dBFs @ 1Khz)
Freq response	20Hz-15kHz
Dynamic range	108 dB
Sources	Streamer1_Source , Streamer2_Source
AUDIO INPUT	
Encoder Streaming Input source	User selectable between Tuner-1, Tuner-2, External Input Analog, External Input AES/EBU
DIGITAL INPUT MODULE	
Connectors:	XLR, female – Electronically balanced
Format	AES3/EBU

Sample rates	32 kHz / 44.1 kHz / 48 kHz / 96 kHz with src and jitter correction
Operative Nominal level:	From 0.0 dBFs to -24dBFs (0.1 dBu step)
Dynamic Range:	125 dB (Typ)
Distortion	less than 0.01% TDH+Noise (-20dBFs@ 1Khz)
Input Modes:	Stereo, Mono (Left), Mono (Right), Mono (Left+Right)
ANALOG INPUT MODULE	
A/D Conversion	24bit Sigma-Delta Conversion – 32kHz sample rate
Connectors:	XLR, female - Electronically balanced
AD Clipping Point	+20.0dBu
Operative Nominal Level:	From –12.0dBu to +12.0dBu (0.1dBu Step)
Line Impedance	10 kΩ (Electronically balanced selectable) EMI–suppressed
Distortion:	less than 0.02% TDH+NOISE (0.0dBu @ 1Khz)
AD Dynamic Range:	108 dB RMS (110 dB A-weighted, 20Hz - 15kHz)
Input Modes:	Stereo, Mono (Left), Mono (Right), Mono (Left+Right)
AUDIO & RDS STREAMING MODULES	
Protocols	UDP/RTP, TCP/IP, Shoutcast and IceCast2
Encoders	OGG-VORBIS
Interface	Ethernet Port 10/100 Mb/s
Bitrate	User select 24 kbps to 192 kbps
Sample Rates	32Ksamples/sec
RDS Streaming	Proprietary redundant protocol over UDP or RAW-TCP/IP
Administration	User right management

18 WEEE Directive – Informativa RAEE



In line with EU Directive 2012/19/UE for waste electrical and electronic equipment (WEEE), this electrical product must not be disposed of as unsorted municipal waste. Please dispose of this product by returning it to the point of sale or to your local municipal collection point for recycling.

In Übereinstimmung mit der Richtlinie 2012/19/UE des Europäischen Parlaments und des Rates über Elektro- und Elektronik-Altgeräte (WEEE) darf dieses Elektrogerät nicht im normalen Hausmüll oder dem Gelben Sack entsorgt werden. Wenn Sie dieses Produkt entsorgen möchten, bringen Sie es bitte zur Verkaufsstelle zurück oder zum Recycling-Sammelpunkt Ihrer Gemeinde.

Conformément à la Directive 2012/19/UE sur les déchets d'équipements électriques et électroniques (DEEE), ce produit électrique ne doit en aucun cas être mis au rebut sous forme de déchet municipal non trié. Veuillez vous débarrasser de ce produit en le renvoyant à son point de vente ou au point de ramassage local dans votre municipalité, à des fins de recyclage.

In navolging van richtlijn 2012/19/UE van het Europees Parlement en de Raad betreffende afgedankte elektrische en elektronische apparatuur (AEEA) mag dit elektrische product niet als ongescheiden huisvuil worden weggedaan. Breng dit product terug naar de plaats van aankoop of naar het gemeentelijke afvalinzamelingspunt voor recycling.

In ottemperanza alla Direttiva UE 2012/19/UE sui rifiuti di apparecchiature elettriche ed elettroniche (RAEE), questo prodotto elettrico non deve essere smaltito come rifiuto municipale misto. Si prega di smaltire il prodotto riportandolo al punto vendita o al punto di raccolta municipale locale per un opportuno riciclaggio.

De conformidad con la Directiva 2012/19/UE de la UE sobre residuos de aparatos eléctricos y electrónicos (RAEE), este producto eléctrico no puede desecharse con el resto de residuos no clasificados. Deshágase de este producto devolviéndolo al punto de venta o a un punto de recogida municipal para su reciclaje.

I henhold til EU-direktiv 2012/19/UE om affald af elektrisk og elektronisk udstyr (WEEE) må dette udstyr ikke bortskaffes som usorteret husholdningsaffald. Bortskaf dette produkt ved at returnere det til salgsstedet eller til det lokale indsamlingssted, så det kan genbruges.

I linje med EU-direktiv 2012/19/UE om avfall som utgörs av eller innehåller elektriska eller elektroniska produkter (WEEE) får denna elektriska produkt inte bortskaffas som osorterat kommunalt avfall. Bortskaffa den i stället genom att lämna in den på försäljningsstället eller din lokala återvinningsstation.

EU:n sähkö- ja elektroniikkalaiteromudirektiivin (2012/19/UE) mukaisesti tätä elektroniikkalaitetta ei saa laittaa lajittelemattoman yhdyskuntajätteen sekaan. Hävitä laite palauttamalla se ostopaikkaan tai viemällä se elektroniikkaromun keräyspisteeseen.

De acordo com a Directiva Europeia 2012/19/UE sobre resíduos sólidos de equipamento eléctrico e electrónico (WEEE), este produto eléctrico não pode ser deixado fora juntamente com o lixo municipal indiferenciado. Por favor, no final da vida útil deste produto, devolva-o ao estabelecimento de aquisição, ou entregue no local de recolha apropriado para reciclagem designado pelo seu município.

V souladu se smrnici EU . 2012/19/UE o odpadních elektrických a elektronických zařízeních (OEEZ) se tento elektrický výrobek nesmí likvidovat jako netříděný komunální odpad. Při likvidaci tento výrobek vraťte prodejci nebo ho odevzdejte k recyklaci do komunálního sběrného zařízení.

Vastavalt EL direktiivile 2012/19/UE, mis käsitleb elektri- ja elektroonikaseadmete jäätmeid (WEEE), ei või antud toodet visata majapidamisjäätmete hulka. Palun tagastage antud toode taaskasutamise eesmärgil müügipunkti või kohaliku piirkonna jäätmekogumise punkti.

V súlade so smernicou 2012/19/UE o odpade z elektrických a elektronických zariadení (OEEZ) sa toto elektrické zariadenie nesmie odstraňovať ako netriedený komunálny odpad. Výrobok odstráňte jeho vrátením v mieste nákupu alebo odovzdaním v miestnom zbernom zariadení na recyklovanie.

19 WARRANTY

The manufacturer offers a one year warranty ex works. Do not open the equipment. Any breaking of the seals will result in forfeiture of the same. The manufacturer is not liable for damages of any kind arising from, or in connection with, the use of the wrong product.